FED. SUP CLASS
4820
(B)

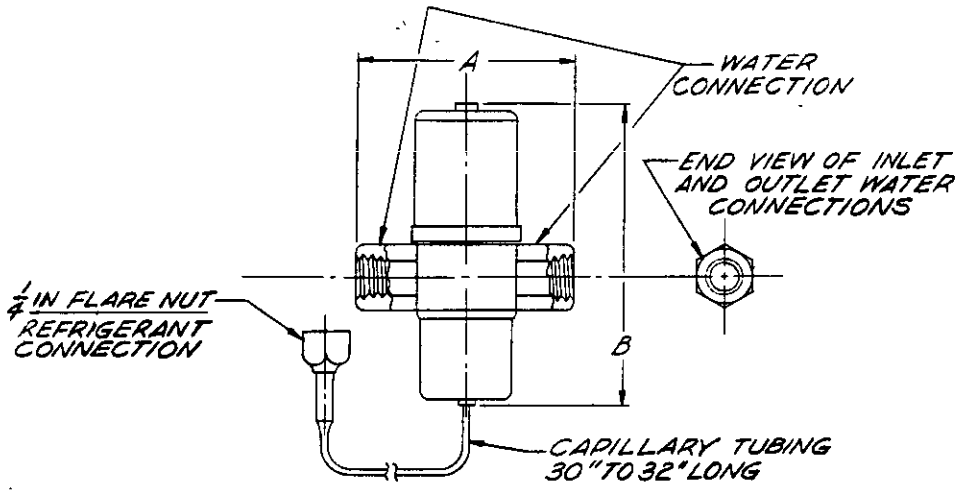

TOP OR BOTTOM POWER UNIT

DASH NO.	WATER INLET & OUTLET CONNECTIONS (INCHES) NPT	RATE OF WATER FLOW (GPM) MIN	MAX DIMENSIONS (INCHES)	
			A	B
-1	3/8	6	2 15/16	7 3/8
-2	1/2	9	3 1/2	8 5/16
-3	3/4	15	3 11/16	

(C) 4 FEBRUARY 1985

CANCELLED

CANCELLED AFTER 4 FEBRUARY 1985, NO SUPERSEDING STANDARD

1. FOR IT

...G. (MIN).

..., ± 10 F.

...RIGERANT SHALL BE SUITABLE FOR USE WITH REFRIGERANT-12
...ACT WITH WATER SHALL BE CORROSION-RESISTANT.

...FLOW OR WATER TO BE PERMANENTLY MARKED ON VALVE BODY.

...RENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.

6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(B) 7. PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 17797-1.

(C) CANCELLED

APPROVED 21 FEB 62 REVISED (A) 22 OCT '65 (B) 16

Preview Activity
Army - MD
DSA - GS

User Activities
Army - CR
Navy - OS, MS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY - GL Other Cust NAVY - YD USAF - 82	TITLE VALVES, REGULATING, FLUID PRESSURE, (WATER) REFRIGERANT -12	MILITARY STANDARD MS 17797
PROCUREMENT SPECIFICATION MIL-V-23181	SUPERSEDES:	SHEET / OF /

DD FORM 1426 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.