INCH-POUND

MS21254N
22 FEBRUARY 1999
SUPERSEDING
MS21254M
15 AUGUST 1997

MILITARY SPECIFICATION SHEET

(N)

EYE END, TURNBUCKLE, CLIP LOCKING

This specification sheet is approved for use by all Departments andAgencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-DTL-8878.

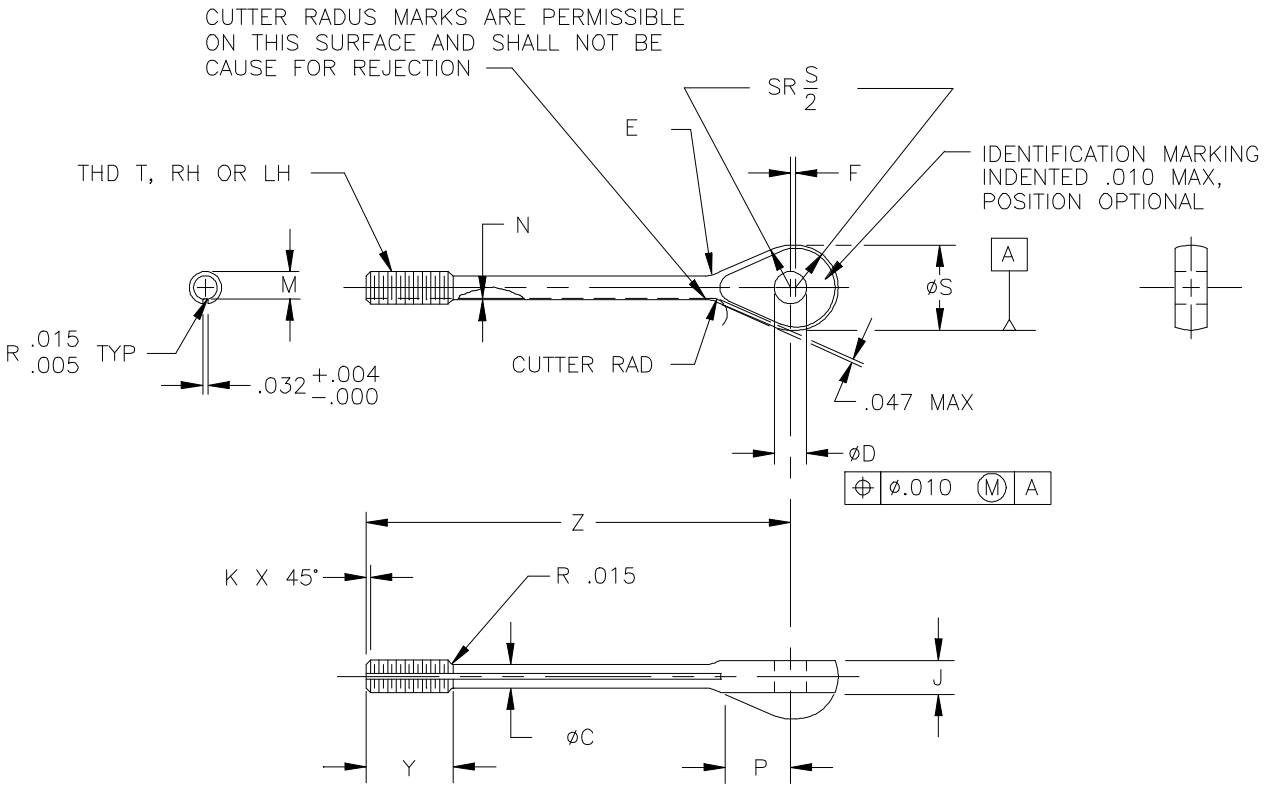

(N) Denotes change(s)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

Table I. Dash numbers and dimensions.

DASH NO. DIRECTION OF THREAD		WIRE ROPE DIA REF	MIN BREAK-ING STRENGTH LB	THREAD T UNF-3A	Æ C +.006 -.000	Æ D +.002 -.000	E ±.031 RAD	F +.010 -.000	J ±.005	K +.000 -.015	M		N MAX	P ±.031	Æ S	Y ±.047	Z +.031 -.015
RH	LH										MAX	MIN					
-2RS	-2LS	.062 (1/16)	800	.1380 (#6)-40	.094	.190	.125	.031	.125	.031	.1139	.1094	.0096	.325	.375	.375	1.500
-2RL	-2LL																2.375
-3RS	-3LS	.093 (3/32)	1600	.190 (#10)-32	.133		.156		.188		.1638	.1568	.0077	.416	.500	.500	1.625
-3RL	-3LL																2.500
-5RS	-5LS	.156 (5/32)	3200	.250 (1/4)-28	.189	.250	.219	.047	.219		.2224	.2152	.0103	.512	.625	.625	1.750
-5RL	-5LL																2.625
-6RS	-6LS	.187 (3/16)	4600	.3125 (5/16)-24	.243	.313	.250		.281	.047	.2830	.2754	.0064	.527	.688	.750	1.875
-6RL	-6LL																2.750
-8RL	-8LL	.250 (1/4)	8000	.3750 (3/8)-24	.306	.375	.281	.063	.328		.3454	.3378	.0057	.678	.875	.875	2.875
-9RL	-9LL	.281 (9/32)	12500	.4375 (7/16)-20	.362	.438	.359		.375		.4052	.3972	.0056	.831	1.063	1.000	3.375
-10RL	-10LL	.312 (5/16)	17500	.5000 (1/2)-20	.425	.500	.406	.078	.469	.063	.4678	.4597	.0058	.900	1.188		3.625

REQUIREMENTS: (N)

1. Material: 17-4PH stainless steel in accordance with AMS 5643 or ASTM A564. Steel, carbon or alloy in accordance with MIL-DTL-8878.

2. Protective treatment: None for 17-4PH. Cadmium plate, QQ-P--416, Type II, Class 2 for carbon steel or alloy steel..

3. Heat treatment: Steel, carbon or alloy shall be heat treated to 125 to 145 KSI in accordance with MIL-H-6875. 17-4PH shall be in accordance with MIL-DTL-8878.

4. Finish: Finish in accordance with MIL-DTL-8878.

5. Threads: Threads shall be in accordance with FED-STD-H28/20.

6. Tolerances: Unless otherwise specified, tolerance: decimals ± .010, angles ±.5°.

7. The OD of the “F” dimension may be a flat area.

8. Part number: Part Identifying Number (PIN) shall consist of the basic MS number, followed by a dash number; C in lieu of dash indicates 17-4PH (dash indicates carbon or alloy steel); first letter following dash number or letter C indicates direction of thread (left or right hand), second letter following dash number indicates length (short or long).

Example of part number: MS21254C3LS- eye, turnbuckle, 17-4PH, .1900 (#10)-32 left hand thread, short.
MS21254-3RL- eye, turnbuckle, steel, .1900 (#10)-32 right hand thread, long.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

NOTES:

1. Remove all burrs and sharp edges. (Burrs in thread area which do not interfere are acceptable).

2. Dimensions in inches.

3. Interpret drawing in accordance with ASME Y14.5M.

4. MS21254 items can replace AN165 items of like thread size and material..

5. Use –5 parts with .125 (1/8) inch diameter wire rope, minimum breaking strength 2200 pounds (Ref).

6. Steel, Carbon and Alloy eye end turnbuckles are inactive for new design. 17-4PH stainless eye end turnbuckles shall be used for new design and can be used to replace comparable steel parts..

7. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence.

8. Unless otherwise specified, issues of referenced documents are those in effect at the time of solicitation.

9. MS33736 for locking clip.

SUBSTITUTION TABLE

The parts covered by dash numbers shown on AN165 are cancelled after 25 November 1963. Use the dash numbers given in the preceding sheet. The cancelled parts cannot replace the new parts and should be used until existing stock is depleted. Use only the MS21254 parts for new design and substitution. Substitution shall be in accordance with this table.

PART NUMBER	
CANCELLED	NEW
AN165	MS21254
DASH NUMBER	DASH NUMBER
8	2
16	3
22	5
32	5
46	6
61	8
80	8
125	9
175	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

(N)

MILITARY INTEREST

Preparing activity:
DLA - GS

Custodians:
Army - AV
Navy - AS
(N) Air Force - 99

(Project 1560-0244)

Review activities:
Army – CR4
Navy – MC
Air force – 82
DLA - IS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.