FSC SUP CLASS 5935

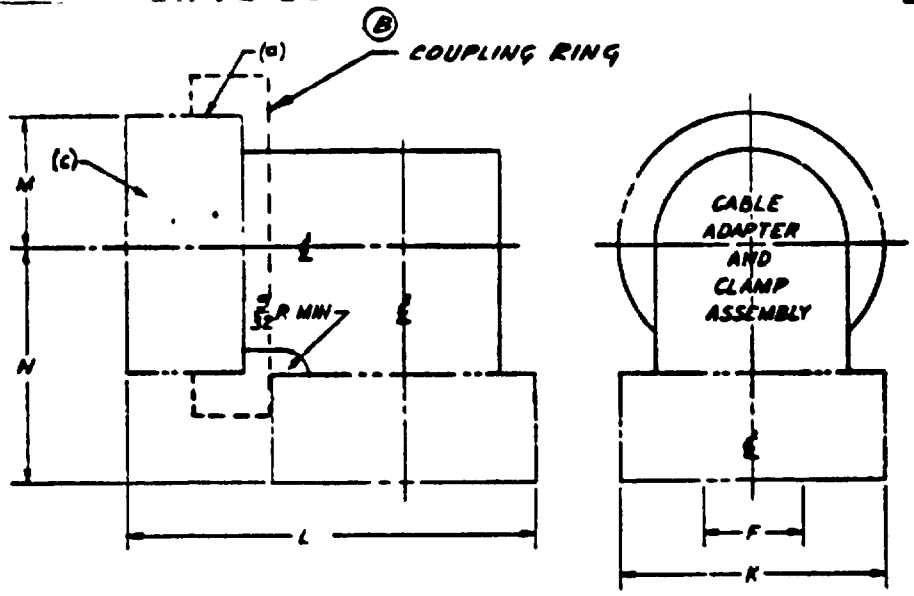

(b) SIZE	F MINIMUM CABLE ENTRY INSIDE DIA	K DIA MAXIMUM ACROSS CLAMP AND ADAPTER	L OVERALL LENGTH MAX.	M MAX.	N MAX.
16	$\frac{25}{64}$	$1\frac{1}{16}$	$2\frac{1}{8}$	.601	$\frac{53}{32}$
19	$\frac{33}{64}$	$1\frac{1}{4}$	$2\frac{1}{4}$	.672	$1\frac{1}{8}$
21	$\frac{41}{64}$	$1\frac{7}{16}$	$2\frac{3}{8}$	.750	$1\frac{9}{32}$

(E)

(a) MATING DIMENSIONS, PLUG COUPLING, IN ACCORDANCE WITH
(1) MS24243 P FOR PIN CONTACTS, "P" IN PART NUMBER, OR
(2) MS24243 F FOR SOCKET CONTACTS, "F" IN PART NUMBER.
(b) SHELL SIZE AS SPECIFIED IN CONNECTOR PART NUMBER.
(c) INSERT ARRANGEMENT IN ACCORDANCE WITH MS24242. INSERT ARRANGEMENT NUMBER CORRESPONDING TO SHELL SIZE AND AS SPECIFIED IN CONNECTOR PART NUMBER. ALTERNATE INSERT POSITION, IF APPLICABLE, AS SPECIFIED IN CONNECTOR PART NUMBER.
EXAMPLE OF CONNECTOR PART NUMBERS: SEE MIL-C-25956

(B)

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.002, FRACTIONS ±$\frac{1}{64}$, ANGLES ±$\frac{1}{2}$°.

CONTACTS SUPPLIED WITH BUT NOT INSTALLED IN CONNECTORS.

APPROVED 9-JAN-58 REVISED (A) 27 MAY 58 (B) 28 OCT 60

CUSTODIANS: Air Force	OTHER INT. A- S- N-	MILITARY STANDARD: CONNECTOR-PLUG, ELECTRICAL, 90°	MS24237 (USAF)
PROCUREMENT SPECIFICATION: MIL-C-25955	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.