FED. SUP CLASS
2530

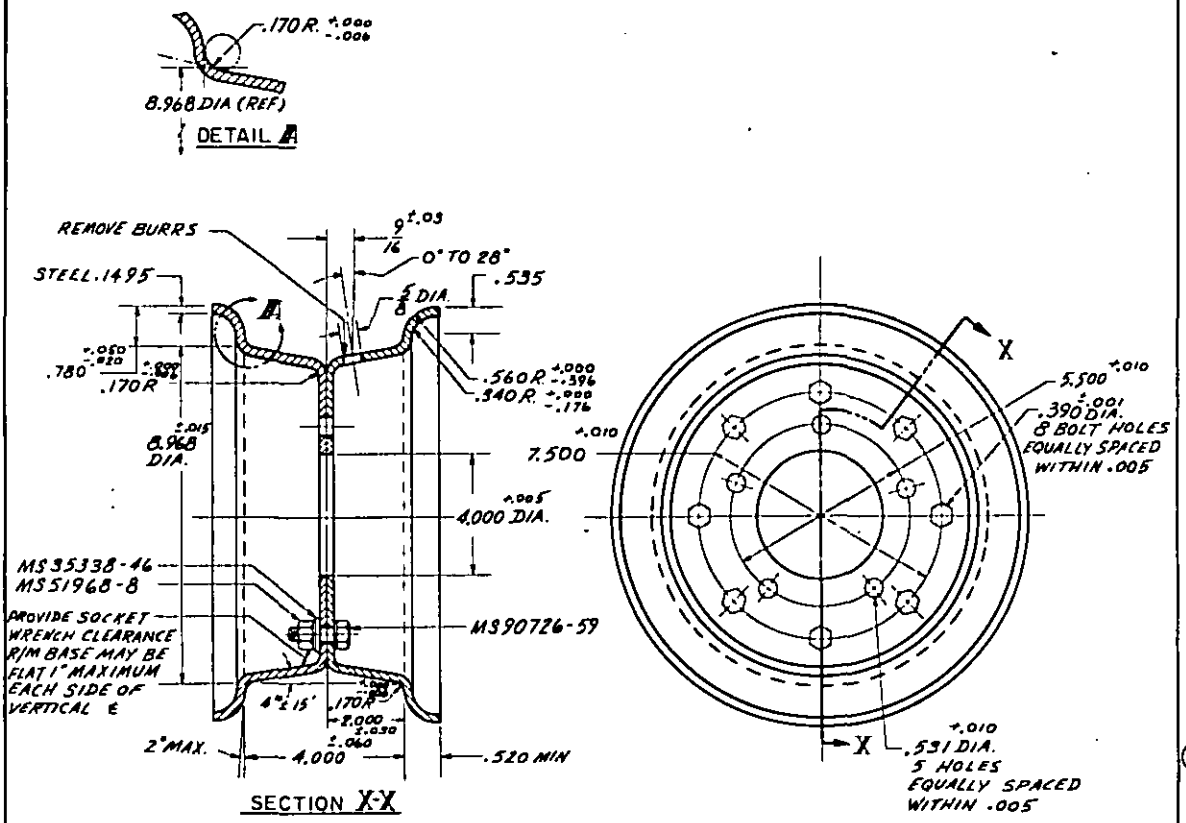

MS PART NO.	MATERIAL
MS 24325-1	STEEL

NOTES

1. THIS SHALL BE A DEMOUNTABLE TYPE WHEEL WHICH CAN BE REMOVED FROM THE HUB WITHOUT DEFLATING THE TIRE.
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, FRACTIONS ± 1/64.
3. WHEEL SHALL FIT HUBS, MS 24328 AND MS 24330. SEE MS 24322.
4. THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 12 JUNE 1956 REVISED (A) 16 JULY 1959 (B) 5 SEPT 1962 (C) 14 OCT 1977

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

(C) ENTIRE STANDARD REVISED

*U.S. GOVERNMENT PRINTING OFFICE: 1977—703-122/6598

P.A. 99 Other Cust YD AT	TITLE WHEEL FOR 6.00—9 TIRE	MILITARY STANDARD MS 24325	
PROCUREMENT SPECIFICATION MIL—W—8005	SUPERSEDES:	SHEET 1 OF 1	

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:52Z
Check the source to verify that this is the current version before use.