FED. SUP CLASS
1650, 1420

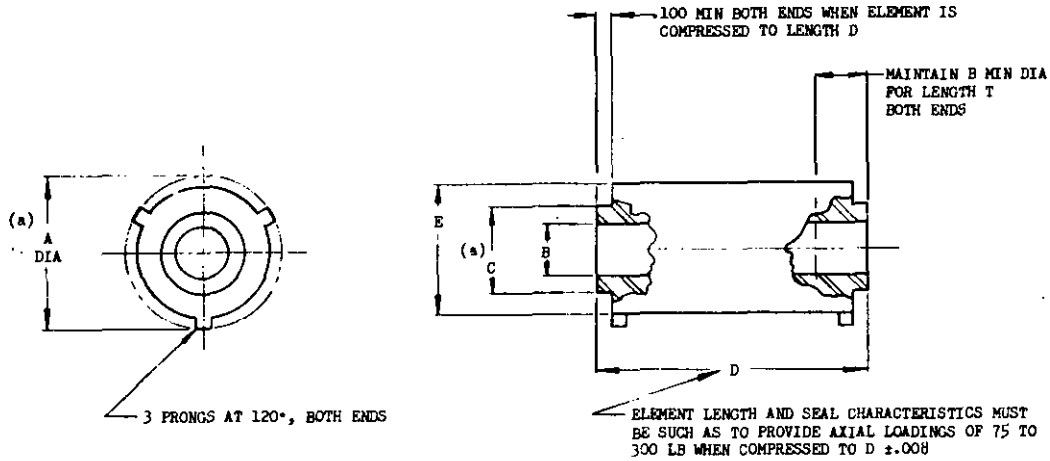

DASH NO.	RATED FLOW GPM	A ±.002 DIA	B MIN DIA	C +.000 -.005 DIA	D	E MAX DIA	T MIN	MAX DRY WEIGHT OZ
-4	1.2	.868	.351	.749	1.400	.831	.000	2.0
-6	3.5				3.000			3.5
-8	6.0	1.179	.581	.949	3.062	1.137	1.000	5.0
-10	10.5	1.368	.609	1.204	4.000	1.290		7.0
-12	16.0	1.492		1.249	5.625	1.380		10.0
-16	29.0	1.992	.851	1.759	7.000	1.845		20.0

(a) CIRCULAR SURFACES OF DIA A AND C TO BE CONCENTRIC WITHIN .003 TIR, BOTH ENDS.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ±2°.

THIS ELEMENT IS FOR USE IN MS24428 AND MS24430 FILTERS WITHOUT A RELIEF VALVE.
SEALS SHALL BE PERMANENTLY ATTACHED TO BOTH ENDS OF THE ELEMENT AND SHALL BE FREE TO FLEX DURING ASSEMBLY.
THE ELEMENT SHALL BE REVERSIBLE.

APPROVED 1 May 61 REVISED (A) 1 Feb 62 (B) 7 Aug 63 (C) 23 Apr 75

(C) CANCELED AFTER 23 APRIL 1975. NO SUPERSEDING STANDARD.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAF - 11 Other Cust Army -	TITLE FILTER ELEMENT, FLUID, PRESSURE - HYDRAULIC, 3,000 PSI, ABSOLUTE 25 MICRON, STYLE B, -65°F TO +600°F	MILITARY STANDARD MS24432
PROCUREMENT SPECIFICATION MIL-F-25682	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated) PREVIOUS EDITION OF THIS FORM IS OBSOLETE

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil Downloaded: 2026-01-25T14:54Z
Check the source to verify that this is the current version before use.