FED SUP CLASS
5935

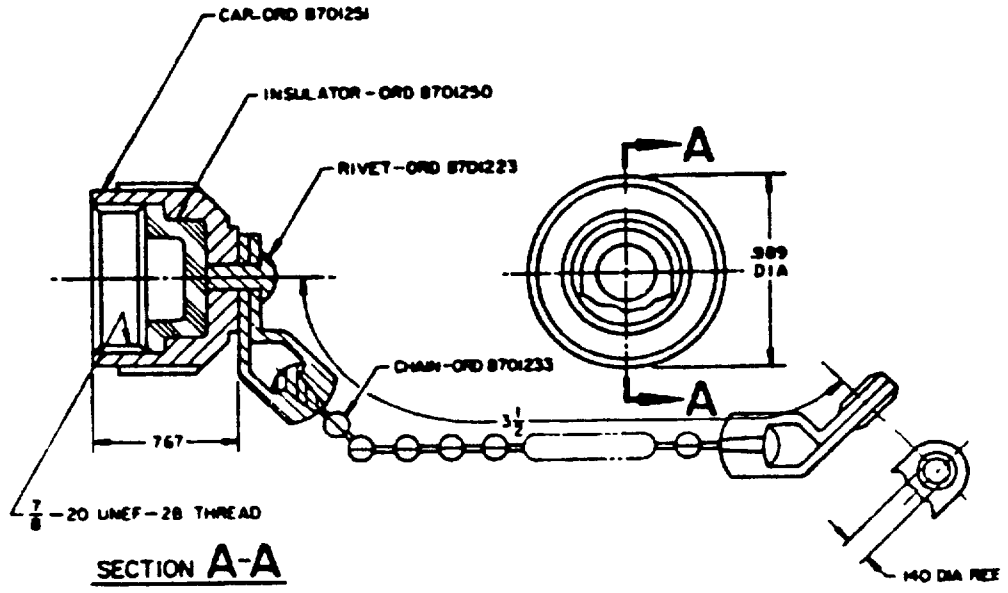

SECTION A-A

REQUIREMENTS

1 CHAIN MUST MOVE FREELY ON CAP AFTER ASSEMBLY AND WITHSTAND A PULL OF 30 POUNDS

(A) 2. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FED-STD-H28

3 MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130

NOTES

(A) 1. CAP AND CHAIN FOR USE WITH CONNECTOR MS27190

2. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND ARE FOR ENGINEERING REFERENCE ONLY.

(A) 3 REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

(A) 4 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

5 REFERENCED ARMY DRAWINGS MAY BE OBTAINED FROM THE US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MI 48397-5000.

APPROVED 9 FEB 1982 REVISED (A) 13 MAR 87

(A) DENOTES CHANGES

MS PART NO	FORMER PART NO
MS 27193-1	ORD 7388346

P A ARMY-AT Other Cust AF-17	INTERNATIONAL INTEREST	TITLE DUMMY CONNECTOR, PLUG-HIGH VOLTAGE	MILITARY STANDARD MS27193
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 1 OF 1

DD FORM 672-1 COORDINATED

DLA-FS

AMSC N/A

A Approved for public release, distribution is unlimited

DISTRIBUTION STATE of the Department of Defense

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.