FED. SUP CLASS
5935

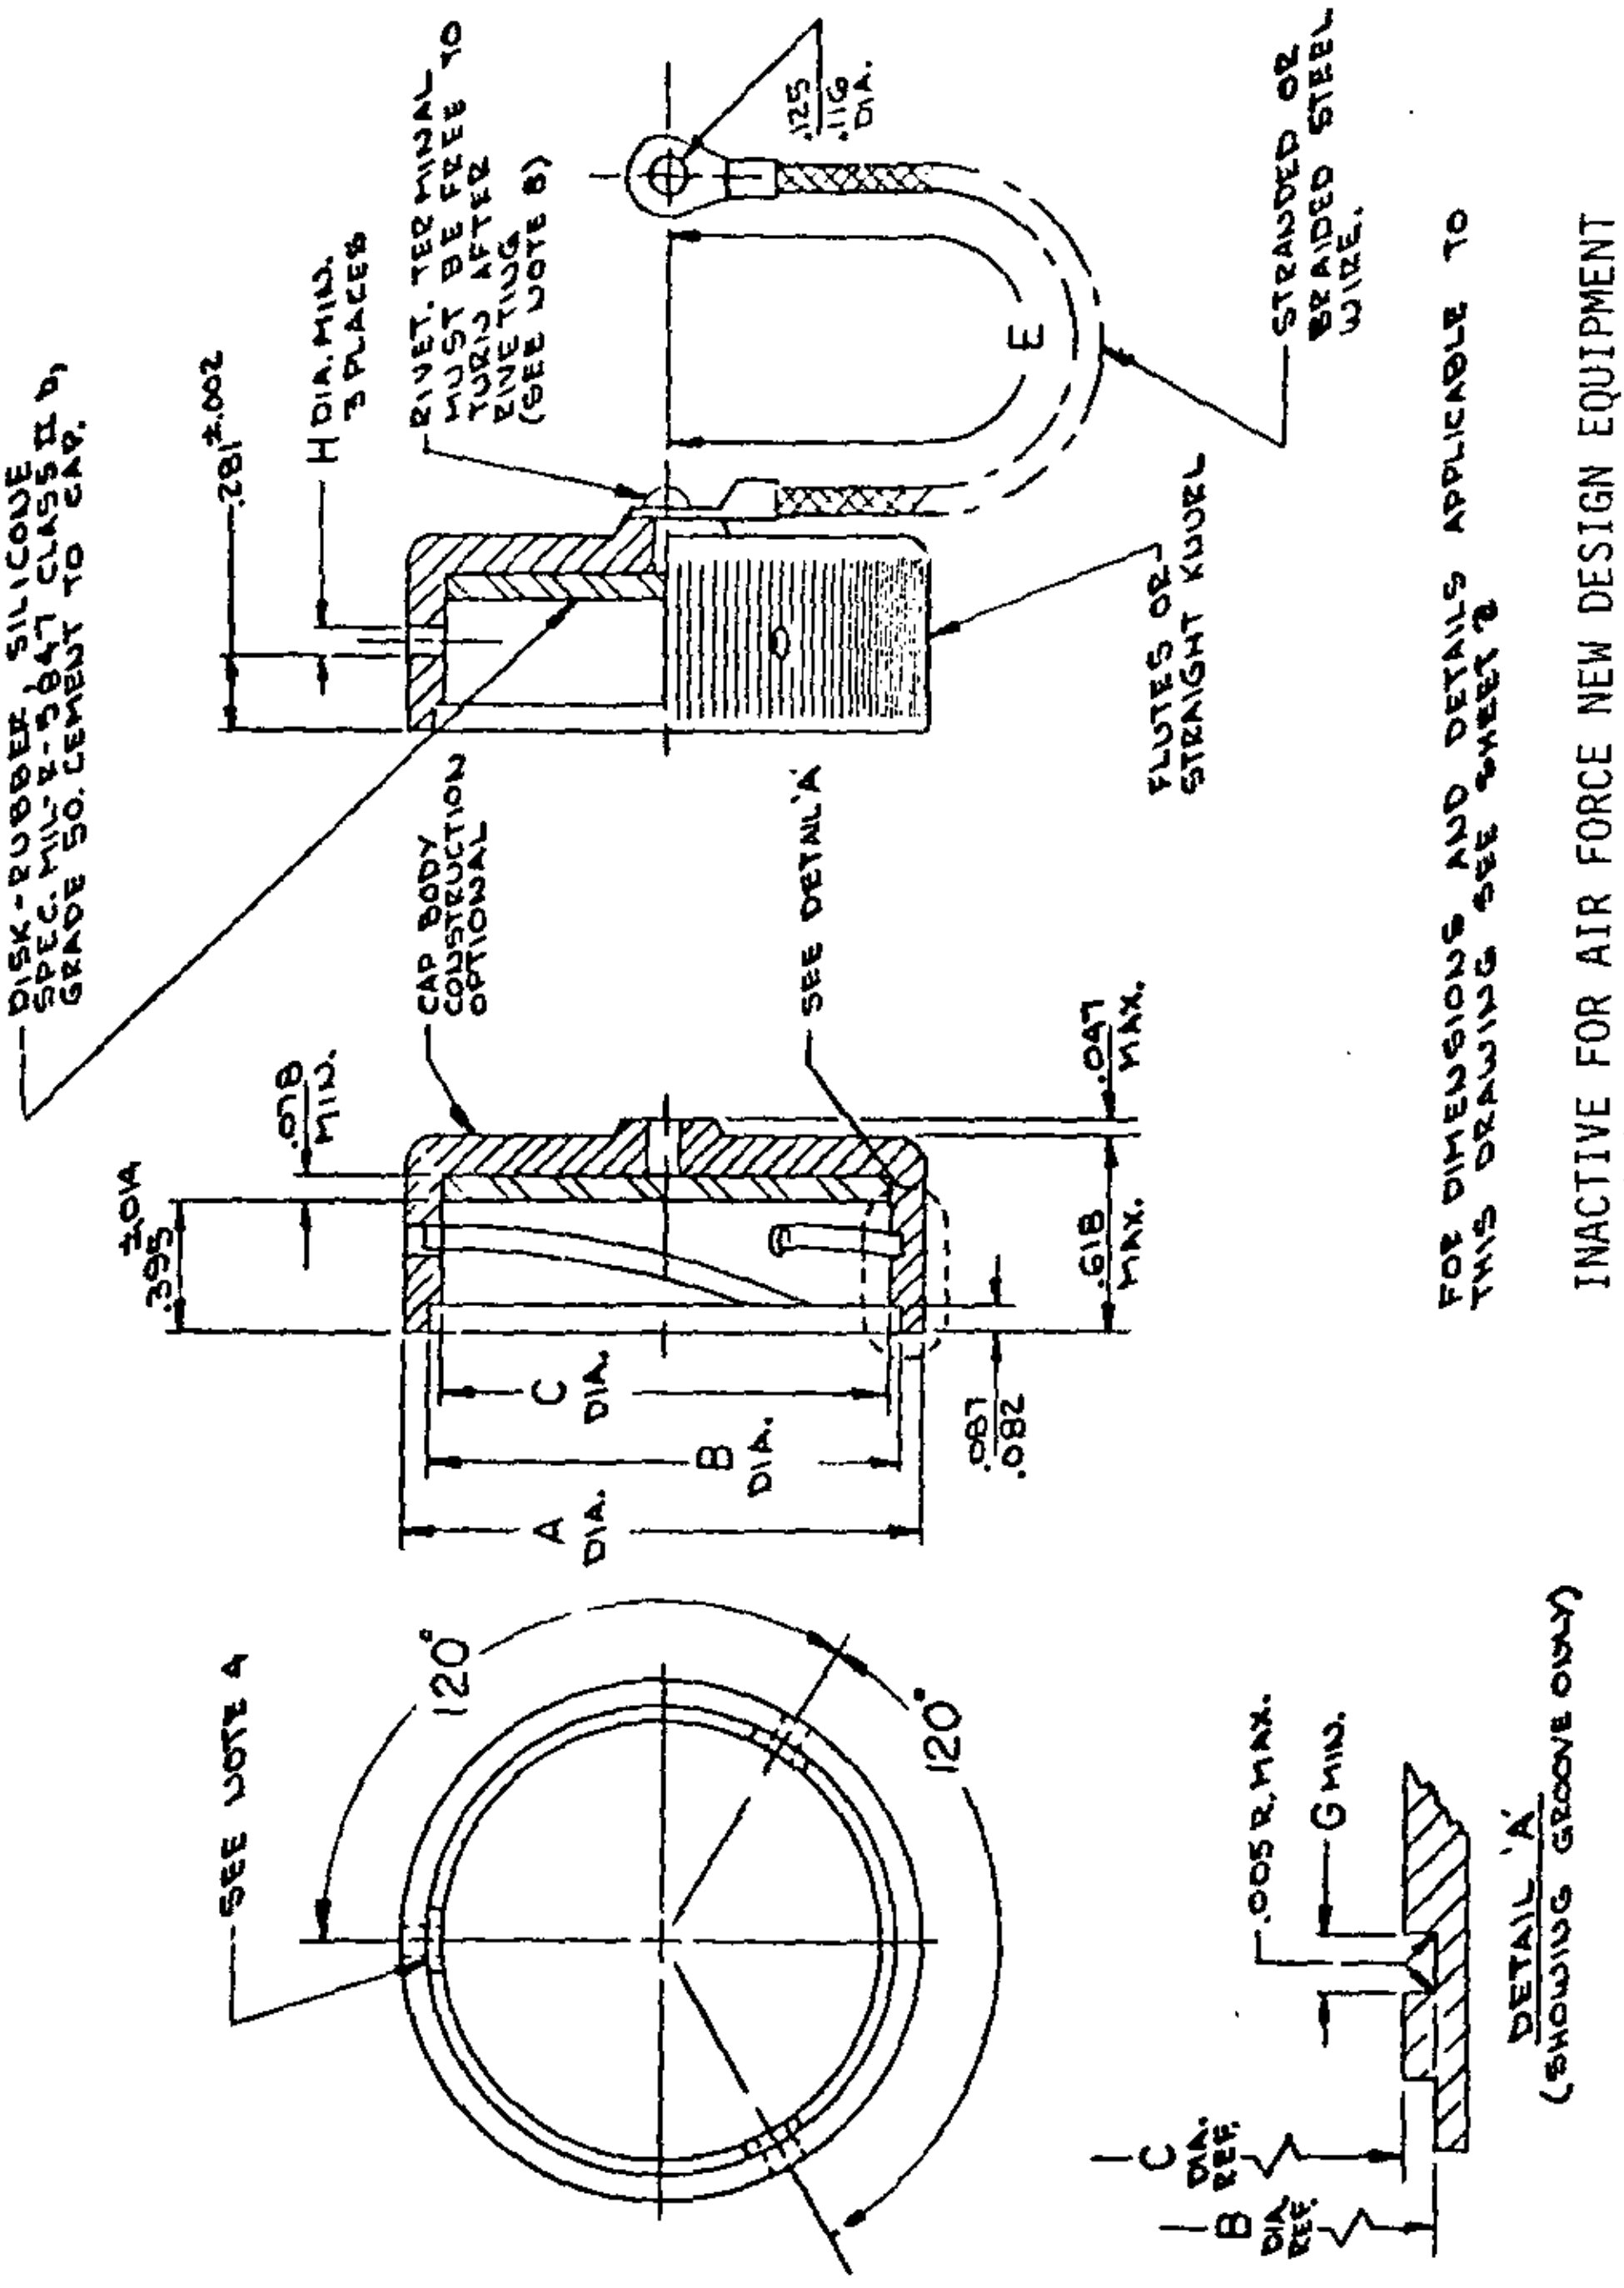
DISK-RUBBER, SILICONE SPEC. MIL-R-5847 CLASS II b, GRADE 50. CEMENT TO CAP.
.281±.002
H DIA. MIN. 3 PLACES
RIVET. TERMINAL MUST BE FREE TO TURN AFTER RIVETING (SEE NOTE 8)
.125 / .116 DIA.
E
STRANDED OR BRAIDED STEEL WIRE.
FLUTES OR STRAIGHT KNURL
CAP BODY CONSTRUCTION OPTIONAL
SEE DETAIL 'A'
.078 MIN.
.395±.014
.047 MAX.
.618 MAX.
.087 / .082
C DIA.
B DIA.
A DIA.
120°
120°
SEE NOTE 4
.005 R, MAX.
G MIN.
C DIA. REF.
B DIA. REF.
DETAIL 'A'
(SHOWING GROOVE ONLY)

FOR DIMENSIONS AND DETAILS APPLICABLE TO THIS DRAWING SEE SHEET 2

INACTIVE FOR AIR FORCE NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT.
Use MIL-C-83723/60 which is interchangeable.

Ⓕ CANCELED — FOR PROCUREMENT USE MIL-C-83723/60

APPROVED 15 Aug 63 REVISED Ⓔ 25 AUG 77 Ⓕ 10 JAN 80

Ⓕ denotes changes

This military standard is approved for use by Engineering and Technical Support Division, AFLC/LOIE, Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

Reviewer activities: AF - 11, 17, 99
DLA - ES

P.A AF - 85 Other Cust	International Interest	TITLE CAP, ELECTRICAL CONNECTOR RECEPTACLE, PROTECTIVE, METAL, BAYONET COUPLING	MILITARY STANDARD MS27295(USAF)
Procurement Specification NONE		SUPERSEDES:	PAGE 1 OF 1

DD FORM 1 MAY 73 672 (LIMITED COORDINATION)

5935-F130

Source: https://assist.dla.mil -- Downloaded: 2024-23T15:21:12
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1980-603-121/263