
MIL-B-3628 / 1D
10 February 1988
SUPERSEDING
MIL-B-3628 / 1C
27 August 1973

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED RIFLEMAN, ARMY; PENDANT AND SUSPENSION BAR

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

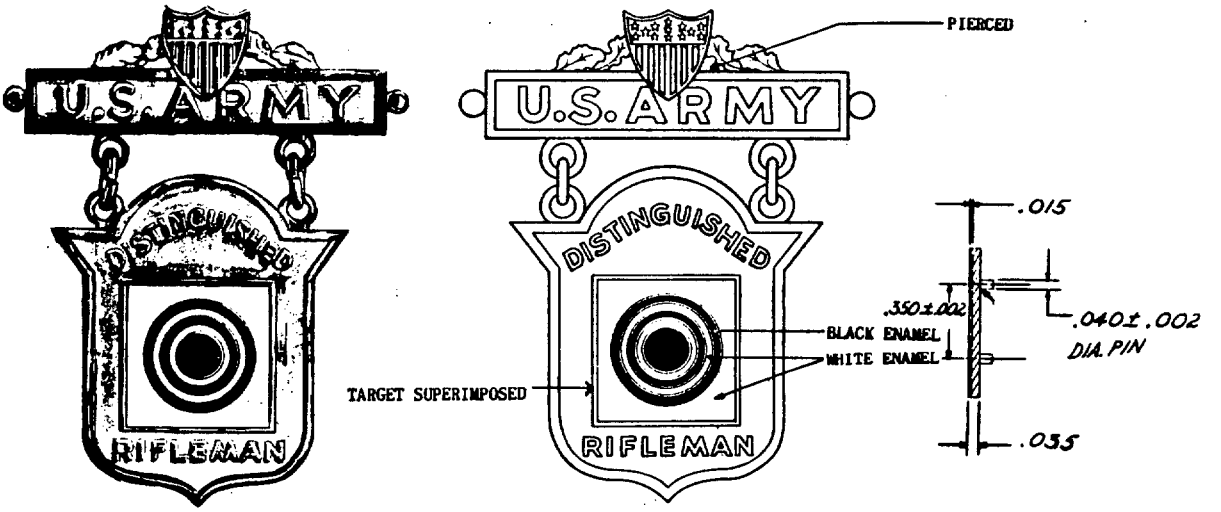

MATERIAL:
PENDANT AND SUSPENSION BAR: 1/10 10 KARAT GOLD FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)

DIMENSIONS (INCHES):
HEIGHT (OVERALL):
ASSEMBLED: 2-3/16 (REF)
PENDANT: 1-1/2 (REF)
SUSPENSION BAR: 9/16 (REF)

WIDTH (OVERALL):
PENDANT: 1-13/32 (REF)
SUSPENSION BAR (INCLUDING BALLS): 1-13/16 (REF)

THICKNESS (AT RIM):
PENDANT: .086 ± .005
SUSPENSION BAR: .070 ± .005

FINISH:
TARGET: ENAMELED AND SUPERIMPOSED
PENDANT, SUSPENSION BAR AND LINKS: ROSE GOLD PLATED, SATIN FINISHED, HIGHLIGHTS AND RIM POLISHED.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:43Z
Check the source to verify that this is the current version before use.

NOTES:

1. ENAMEL SHALL BE BLACK AND WHITE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL COLORS OF THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIPS LISTED BELOW:

COLOR	CHIP NO.
WHITE	28
BLACK	26

2. LUGS SHALL BE FABRICATED FROM GOLD PLATED WIRE .050 INCH IN DIAMETER. THE OUTSIDE DIAMETER OF THE LUGS SHALL BE 3/16 ± 1/64 INCH. LUGS SHALL BE SOLDERED TO THE BAR OR PENDANT USING GOLD SOLDER.

3. LINKS SHALL BE FABRICATED FROM GOLD PLATED WIRE WITH A NOMINAL DIAMETER OF .050 INCH. THE OVERALL DIMENSION OF THE LINKS SHALL BE 1/4 INCH IN LENGTH AND 7/32 INCH IN WIDTH.

4. TWO BRASS BALLS 0.105 INCH IN DIAMETER SHALL BE SOLDERED TO THE SIDES OF THE SUSPENSION BAR AS SHOWN. AS AN ALTERNATE THE BALLS MAY BE AN INTEGRAL PART OF THE BADGE AND MAY BE CUT INTO THE CONTRACTORS WORKING DIE.

5. TARGET SHALL BE SUPERIMPOSED ON THE PENDANT AND SHALL BE SECURED BY MEANS OF TWO SOLID BRASS RIVETS.

6. THE ATTACHING DEVICE SHALL BE THE PRONG AND CLUTCH TYPE, FABRICATED FROM RED BRASS. THE DEVICE SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE OF THE BAR WITH THE PRONGS EQUIDISTANT FROM THE ENDS AND SHALL BE 1-1/2 INCHES APART.

7. A FORCER MAY BE USED TO BRING UP THE DESIGN OF THE SHIELD ON THE SUSPENSION BAR.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455 - 0268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:43Z
Check the source to verify that this is the current version before use.