NOT MEASUREMENT SENSITIVE

MIL-B-3628/3D
7 August 1991
SUPERSEDING
MIL-B-3628/3C
10 February 1988


MILITARY SPECIFICATION SHEET

Badge, Qualification, Distinguished Marksman, Navy; Pendant and Suspension Bar

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.



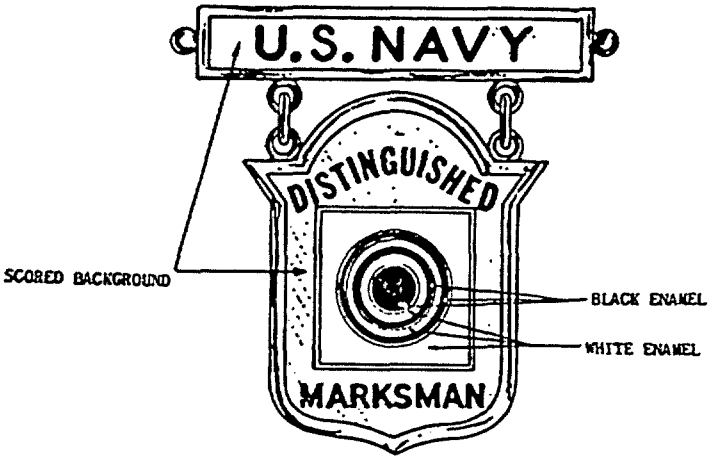

MATERIAL: Pendant, Suspension Bar: 1/10 10 karat gold filled (1/20 Obverse, 1/20 Reverse Over Comm'l Brass Alloy

DIMENSIONS:
HEIGHT (Overall): 1-33/64 inch (3.85 cm) (REF)
WIDTH (Overall): 1-9/32 inch (3.25 cm) (REF)
THICKNESS (Edge): .080 inch ± .005 inch (0.203 cm ± 0.012 cm)

SUSPENSION BAR:
HEIGHT (Overall): 5/16 inch (0.79 cm) (REF)
WIDTH (Overall): 1-7/8 inch (4.76 cm) (REF)
THICKNESS (Edge): .055 inch ± .005 inch (0.139 cm ± 0.012 cm)

FINISH:
Pendant and suspension bar: Gold plated
Obverse: Target enameled, highlights and rim polished
Reverse: Mirror-like polished

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:44Z
Check the source to verify that this is the current version before use.

NOTES:

1. The links shall be fabricated from gold plated wire with a nominal diameter of .044 inch. The overall dimension of the links shall be 13/64 inch (0.52 cm) in width and 1/4 inch inch (0.64 cm) in length.

2. The lugs shall be fabricated from gold plated wire .044 inch in diameter. The lugs shall have an outside diameter of 5/16 inch ± 1/64 inch (0.79 cm ± 0.04 cm). Lugs shall be soldered to the bar or pendant.

3. The attaching device shall be a prong and flat ball clutch type fabricated from red brass. The prongs shall be located on the horizontal centerline of the suspension bar, equidistant from each end and 1-11/32 inches ± 1/32 inch (3.41 cm ± 0.08 cm) apart.

4. Enamel shall be as indicated. The color shall conform to the TIOH color chips listed below or the standard sample.

Color	Chip No.
White	28
Black	26

5. The use of any type of plastic packaging material is prohibited.

Custodian:
Army - IH
Navy - NU

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Projected No. 8455-N613)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:44Z
Check the source to verify that this is the current version before use.