

SUPERSEDING
MIL-B-3628/4A
30 June 1967

MILITARY SPECIFICATION SHEET

Badge, Qualification, DISTINGUISHED PISTOL SHOT, NAVY; Pendant and Suspension Bar

This specification is mandatory for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

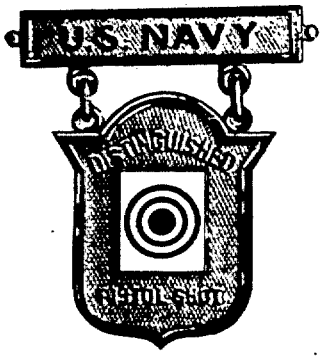

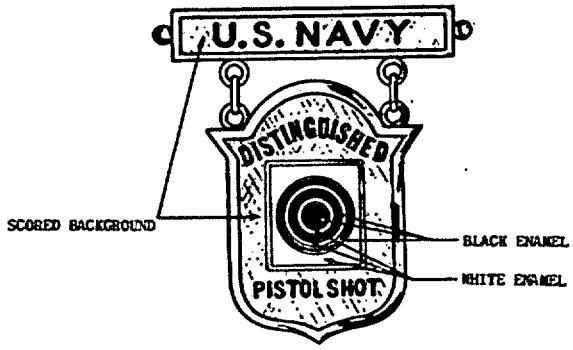

MATERIAL:
PENDANT: 14 KARAT GOLD
SUSPENSION BAR AND LINKS: .900 FINE GOLD (COINING GOLD)

DIMENSIONS (INCHES):
PENDANT:
HEIGHT (OVERALL): 1-17/64 (REF)
WIDTH (OVERALL): 1-1/16 (REF)
THICKNESS (AT EDGE): .062 (REF)
SUSPENSION BAR:
HEIGHT (OVERALL): 9/32 (REF)
WIDTH (OVERALL): 1-1/2 (REF)
THICKNESS (EDGE): .062 ± .005

WEIGHT (ASSEMBLED): 357 GRAINS (MIN)

FINISH:
OBVERSE: TARGET ENAMELED, HIGHLIGHTS AND RIM POLISHED
REVERSE: MIRROR-LIKE POLISHED

NOTES:
1. PENDANT THICKNESS IS GIVEN FOR INFORMATION PURPOSES ONLY. ASSEMBLED WEIGHT GOVERNS.

2. LINKS SHALL BE 7/32 INCH IN LENGTH BY 5/32 INCH IN WIDTH AND SHALL BE FABRICATED FROM .044 INCH NOMINAL DIAMETER WIRE.

3. THE LUGS SHALL BE FABRICATED FROM .004 INCH NOMINAL DIAMETER GOLD WIRE (.900 FINE) AND SHALL BE GOLD SOLDERED TO THE PENDANT AND SUSPENSION BAR 3/4 ± 1/64 INCH ON CENTERS. THE LUGS SHALL HAVE AN OUTSIDE DIAMETER OF 5/16 ± 1/64 INCH.

4. THE ATTACHING DEVICE SHALL BE PIN AND CATCH TYPE AND SHALL BE FABRICATED FROM NICKEL SILVER. THE HINGE AND ROTORY CATCH SHALL BE CENTERED ON THE BACK OF THE SUSPENSION BAR EQUIDISTANT FROM THE ENDS. THE PIN SHALL BE 1-1/4 ± 1/64 INCH IN LENGTH.

5. ENAMEL SHALL BE BLACK AND WHITE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL COLORS OF THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIDH COLOR CHIPS LISTED BELOW:

COLOR	CHIP NO.
WHITE	28
BLACK	26

CUSTODIAN:
NAVY - PE
REVIEW ACTIVITY:
NAVY - PE
OTHER - DP

PREPARING ACTIVITY:

THE INSTITUTE OF HERALDRY,
UNITED STATES ARMY

Project No. 8455-0131

FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.