NOT MEASUREMENT SENSITIVE


MIL-B-3628/4E
9 August 1991
SUPERSEDING
MIL-B-3628/4D
7 April 1989

MILITARY SPECIFICATION SHEET

Badge, Qualification, Distinguished Pistol Shot, Navy; Pendant and Suspension Bar

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

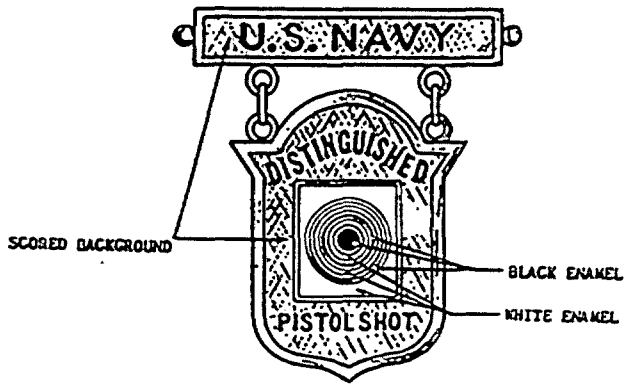

MATERIAL: Pendant, Suspension Bar: 1/10 10 karat gold filled (1/20 obverse, 1/20 reverse over comm'l brass alloy

DIMENSIONS:
PENDANT:
HEIGHT (Overall): 1-17/64 inch (3.21 cm) (REF)
WIDTH (Overall): 1-1/16 inch (2.70 cm) (REF)
THICKNESS (At edge): .062 inch ± .005 inch (0.157 cm ± 0.012 cm)

SUSPENSION BAR:
HEIGHT (Overall): 9/32 inch (0.71 cm) (REF)
WIDTH (Overall): 1-1/2 inch (3.81 cm) (REF)
THICKNESS (Edge): .062 inch ± .005 inch (0.157 cm ± 0.012 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:44Z
Check the source to verify that this is the current version before use.

FINISH:

PENDANT: Hard enamelled, gold plated, highlights and rim polished. Reverse mirror-like polished.

SUSPENSION BAR: Gold plated, highlights and rim polished. Reverse mirror-like polished.

NOTES:

1. The links shall be fabricated from gold plated wire with a nominal diameter of .044 inch (0.111 cm). The overall dimension of the links shall be 7/32 inch (0.56 cm) in length by 5/32 inch (0.40 cm) in width.

2. The lugs shall be fabricated from gold plated wire .044 inch (0.111 cm) in diameter. The outside diameter of the lugs shall be 5/16 inch ± 1/64 inch (0.79 cm ± 0.04 cm). Lugs shall be soldered to the bar or pendant using gold solder.

3. The attaching device shall be a prong and flat ball type clutch fabricated from from red brass. The prongs shall be located on the horizontal centerline equidistant from each end and 1-1/16 inch ± 1/32 inch (2.70 cm ± 0.08 cm) apart.

4. Enameled areas shall be as indicated. The color shall conform to the TIOH color chip numbers listed below or the standard sample.

Color	Chip No.
White	28
Black	26

5. The use of any type of plastic packaging material is prohibited.

Custodian:
Army - IH
Navy - NU

Preparing Activity:
Army - IH

Review Activity:
DLA - CT

(Projected No. 8455-N613)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:44Z
Check the source to verify that this is the current version before use.