INCH-POUND


MIL-DTL-3628/4H
5 February 2010
SUPERSEDING
MIL-DTL-3628/4G
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, NAVY; PENDANT AND SUSPENSION BAR

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

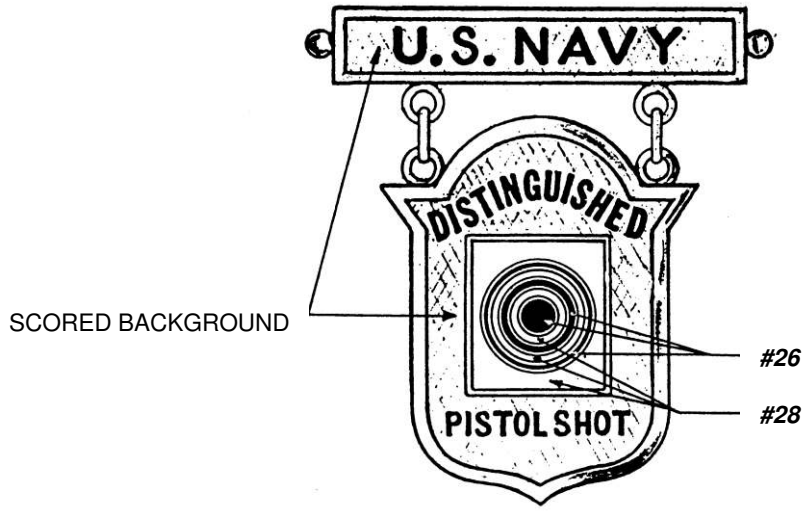

MATERIAL:
PENDANT: Gilding Metal
SUSPENSION BAR: Red Brass

FINISH:
PENDANT: Hard Enameled, 24K Gold Plated, Matte Finish, Highlights and Rim Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8. REVERSE - 24K Gold Plated Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

SUSPENSION BAR: 24K Gold Plated, Matte Finish, Highlights and Rim Polished, and shall match TIOH Metal Finish Chip Number 8. REVERSE - 24K Gold Plated Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:44Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
PENDANT:
HEIGHT (overall): 1-17/64 inches (REF)
WIDTH (overall): 1-1/16 inches (REF)
THICKNESS (at edge): 0.062 inch ± 0.005 inch

SUSPENSION BAR:
HEIGHT (overall): 9/32 inch (REF)
WIDTH (overall): 1-1/2 inches (REF)
THICKNESS (edge): 0.062 inch ± 0.005 inch

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to TIOH Enamel Color Chip Numbers listed below.

COLOR	CHIP NUMBER
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. The links shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch ± 1/64 inch. The overall dimension of the links shall be 7/32 inch ± 1/64 inch in length by 5/32 inch ± 1/64 inch in width.

5. The lugs are integral.

6. The attaching device shall be a prong and flat ball clutch type. The prongs shall be located on the horizontal center line of the suspension bar, equidistant from each end and 1-1/16 inches ± 1/32 inch apart.

7. The use of any type of plastic packaging material is prohibited.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-2010-059)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:44Z
Check the source to verify that this is the current version before use.