NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/5F
15 November 1996
SUPERSEDING
MIL-B-3628/5E
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED RIFLEMAN, CIVILIAN AWARD, ARMY; PENDANT AND SUSPENSION BAR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

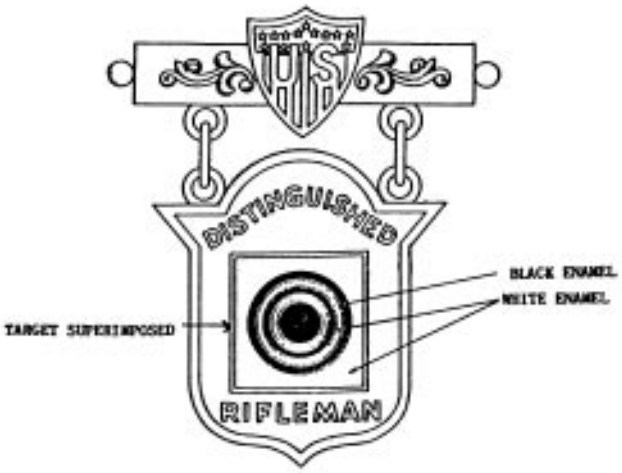

MATERIAL:
PENDANT AND SUSPENSION BAR: Red Brass
TARGET: Gilding Metal
FINISH:
TARGET: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Number 6.
PENDANT AND SUSPENSION BAR: Gold Plated, Rose Gold Plated, Matte Finish, Highlights and Rim Polished shall match TIOH Metal Finish Number 20.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
ASSEMBLED: 2-9/32 inches (5.79 cm) (REF)
PENDANT: 1-1/2 inches (3.81 cm) (REF)
SUSPENSION BAR: 21/32 inch (1.67 cm) (REF)
TARGET: 11/16 inch (1.75 cm) (REF)
WIDTH (Overall):
PENDANT: 1-13/32 inches (3.57 cm) (REF)
SUSPENSION BAR (Including Balls): 1-5/8 inches (4.13 cm) (REF)
TARGET: 11/16 inch (1.75 cm) (REF)
THICKNESS (At Rim):
PENDANT (Edge): 0.086 inch ± 0.005 inch (0.218 cm ± 0.012 cm)
SUSPENSION BAR (Thickest Point): 0.095 inch ± 0.005 inch (0.241 cm ± 0.012 cm)
TARGET: 0.035 inch ± .002 inch (0.080 cm ± 0.005 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. Lugs shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch (0.127 cm). The outside diameter of the lugs shall be 3/16 inch ± 1/64 inch (0.48 cm ± 0.04 cm). Lugs shall be hard soldered to the pendant bar 19/32 inch ± 1/64 inch (0.71 cm ± 0.04 cm) on centers. As an alternate method, lugs may be cut into the working die.

5. Links (jump rings) shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch (0.127 cm). The links shall have an outside diameter of 3/16 inch + 1/32 inch - 0 inch (0.48 cm + 0.08 cm - 0 cm).

6. Two brass balls 0.105 inch (0.267 cm) in diameter shall be soldered to the sides of the suspension bar as shown. As an alternate method, the balls may be an integral part of the suspension bar and may be cut into the contractor's working die.

7. Target shall be superimposed on the pendant and shall be secured by means of two solid brass rivets.

8. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal center line of the bar equidistant from each end and 1-5/16 inch ± 1/64 inch (3.33 cm ± 0.04 cm) apart.

9. A forcer may be used to bring up the design of the shield on the suspension bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.