INCH-POUND


MIL-DTL-3628/6G
5 February 2010
SUPERSEDING
MIL-DTL-3628/6F
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, CIVILIAN AWARD, ARMY; PENDANT AND SUSPENSION BAR

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

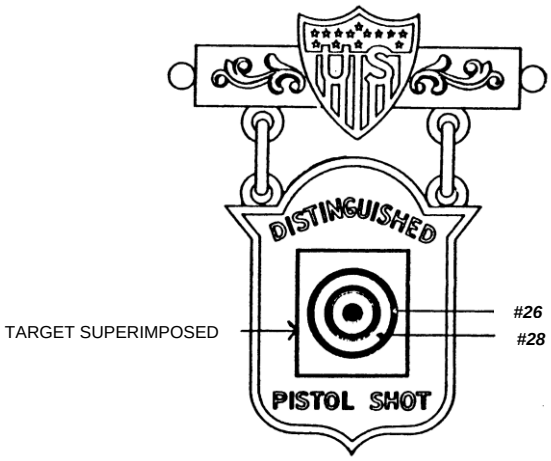

MATERIAL:
PENDANT AND SUSPENSION BAR: Red Brass
TARGET: Gilding Metal

FINISH:
TARGET: Hard Enameled, 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
PENDANT AND SUSPENSION BAR: Gold Plated, Matte Finish, Highlights and Rim Polished and shall match TIOH Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (overall):
- ASSEMBLED: 1-15/16 inches (REF)
- PENDANT: 1-1/4 inches (REF)
- SUSPENSION BAR: 9/16 inch (REF)
- TARGET: 17/32 inch (REF)

WIDTH (overall):
- PENDANT: 1-3/64 inches (REF)
- SUSPENSION BAR (including balls): 1-1/2 inches (REF)
- TARGET: 15/32 inch (REF)

THICKNESS:
- PENDANT (at rim): 0.086 inch ± 0.005 inch
- SUSPENSION BAR (thickest point): 0.095 inch ± 0.005 inch
- TARGET: 0.035 inch ± .002 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to TIOH Enamel Color Chip Numbers listed below.

COLOR	CHIP NUMBER
Black	26
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. Lugs shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch. The outside diameter of the lugs shall be 3/16 inch ± 1/64 inch. Lugs shall be hard soldered to the pendant or bar 19/32 inch ± 1/64 inch on centers. As an alternate method, lugs may be cut into the working die.

5. Two brass balls 0.105 inch in diameter shall be soldered to the sides of the suspension bar as shown. As an alternate method, the balls may be an integral part of the suspension bar and may be cut into the contractor's working die.

6. Links (jump rings) shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch. The links shall have an outside diameter of 3/16 inch + 1/32 inch - 0 inch.

7. Target shall be superimposed on the pendant and shall be secured by means of two solid brass rivets.

8. The attaching device shall be prong and clutch type. The prongs shall be located on the horizontal center line of the bar equidistant from each end and 1-5/16 inches ± 1/64 inch apart.

9. A forcer may be used to bring up the design of the shield on the suspension bar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-2010-060)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.