NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/6L(IH)
17 February 2026
SUPERSEDING
MIL-DTL-3628/6K(IH)
31 July 2024

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, DISTINGUISHED PISTOL SHOT, CIVILIAN AWARD, ARMY; PENDANT AND SUSPENSION BAR

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

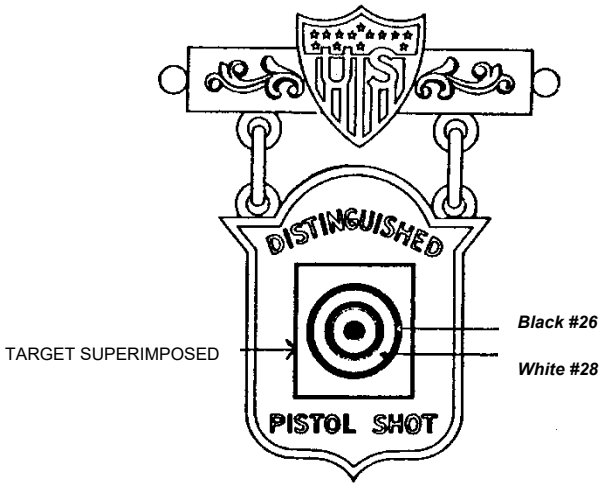

MATERIAL:
PENDANT AND SUSPENSION BAR: Red Brass 85/15 (UNS Alloy No. C-230)
TARGET: Gilding Metal 95/5 (UNS Alloy No. C210)

FINISH:
TARGET: Epoxy resin, 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
PENDANT AND SUSPENSION BAR: 24K Gold Plated, Matte Finish, Highlights and Rim Polished and shall match TIOH Metal Finish Chip Number 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
ASSEMBLED: 1-15/16 inches (REF)
PENDANT: 1-1/4 inches (REF)
SUSPENSION BAR: 9/16 inch (REF)
TARGET: 17/32 inch (REF)
WIDTH (Overall):
PENDANT: 1-3/64 inches (REF)
SUSPENSION BAR (Including balls): 1-1/2 inches (REF)
TARGET: 15/32 inch (REF)
THICKNESS:
PENDANT (At rim): 0.086 inch ± 0.005 inch
SUSPENSION BAR (Thickest point): 0.095 inch ± 0.005 inch
TARGET: 0.035 inch ± .002 inch

ATTACHING DEVICE AND LINKS:
1: The attaching device shall be a prong and wing clutch type.

2: The prongs shall be located on the horizontal center line of the bar equidistant from each end and 1-5/16 inches ± 1/64 inch apart.

3: Links (jump rings) shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch. The links shall have an outside diameter of 3/16 inch + 1/32 inch - 0 inch.

EPOXY: Epoxy enamel shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. Hard cloisonné enamel may be used in lieu of epoxy. If hard cloisonné enamel is used, the required base material shall be Gilding Metal 95/5 (UNS Alloy C-210)

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Black	#26
White	#28

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Lugs shall be fabricated from gold plated wire with a nominal diameter of 0.050 inch. The outside diameter of the lugs shall be 3/16 inch ± 1/64 inch. Lugs shall be hard soldered to the pendant or bar 19/32 inch ± 1/64 inch on centers. As an alternate method, lugs may be cut into the working die.

3. Two brass balls 0.105 inch in diameter shall be soldered to the sides of the suspension bar as shown. As an alternate method, the balls may be an integral part of the suspension bar and may be cut into the contractor's working die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.

4. Target shall be superimposed on the pendant and shall be secured by means of two solid brass rivets.

5. A forcer may be used to bring up the design of the shield on the suspension bar.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2026-053)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:45Z
Check the source to verify that this is the current version before use.