INCH-POUND


MIL-DTL-3628/7H
5 February 2010
SUPERSEDING
MIL-DTL-3628/7G
1 June 1998

DETAIL SPECIFICATION SHEET

# BADGE, QUALIFICATION, NATIONAL RIFLEMAN, NAVY; PENDANT AND SUSPENSION BAR

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

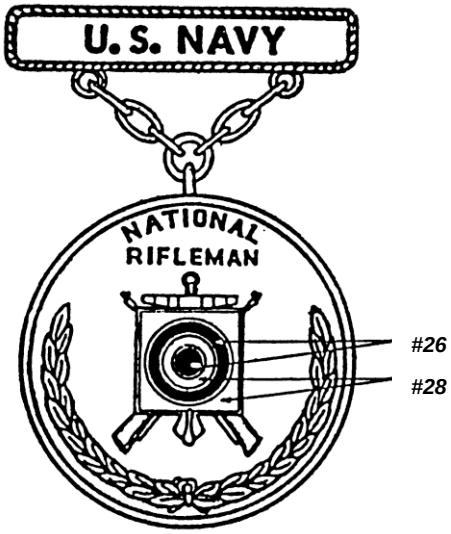


DASH NO.
-1: Gold
-2: Silver
-3: Bronze

MATERIAL:

PENDANT: Gilding Metal

SUSPENSION BAR:
-1, -2: Red Brass
-3: Gilding Metal



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:46Z
Check the source to verify that this is the current version before use.

FINISH:

PENDANT:
OBVERSE:
-1: Hard Enamel, 24K Gold Plated, Matte Finish, Highlights and Rim Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
-2: Hard Enamel, Nickel Plated, Silver Plated, Matte Finish, Highlights and Rim Polished and shall match TIOH Metal Finish Chip Number 13.
-3: Highlights and Rim Polished.

REVERSE:
-1: 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Nickel Plated, Silver Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 13.
-3: Mirror-like Polished.

SUSPENSION BAR:
OBVERSE:
-1: 24K Gold Plated, Matte Finish, Highlights and Rim Polished and shall match TIOH Metal Finish Chip Number 8.
-2: Nickel Plated, Silver Plated, Matte Finish, Highlights and Rim Polished and shall match TIOH Metal Finish Chip Number 13.
-3: Highlights and Rim Polished.

REVERSE:
-1: 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Nickel Plated, Silver Plated, Mirror-like Polished.
-3: Mirror-like Polished.

DIMENSIONS:

PENDANT:
DIAMETER: 1-5/16 inches (REF)
THICKNESS (at edge): 0.085 inch + .010 inch - 0

SUSPENSION BAR:
HEIGHT (including lugs): 3/8 inch (REF)
WIDTH (overall): 1-7/16 inches (REF)
THICKNESS (at edge): 0.080 inch $\pm$ .010 inch

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:46Z
Check the source to verify that this is the current version before use.

2. Enameled areas shall be as indicated. The color shall conform to TIOH Enamel Color Chip Numbers chip listed below.

| COLOR | CHIP NUMBER |
|---|---|
| Black | 26 |
| White | 28 |

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes.

4. The lug (suspension ring) for the pendant shall have a minimum outside diameter of 5/32 inch ± 1/64 inch and wire thickness shall have a nominal thickness of 0.050 inch. The lug shall be soldered at the top of the pendant vertical center line.

5. Suspension links shall be 5/32 inch ± 1/64 inch in width by 3/16 inch ± 1/64 inch in length and fabricated from 0.050 inch nominal diameter wire with the same material and finish as the pendant and suspension bar.

6. Jump rings shall be fabricated from 0.050 inch nominal diameter wire with the same material and finish as the suspension bar. The rings shall have an outside diameter of 3/16 ± 1/32 inch.

7. The attaching device shall be prong and flat ball clutch type. Nickel plated flat ball clutches shall be used for Dash No. -2 and brass flat ball clutches shall be used for Dash No. -1 and -3. The prongs shall be located on the horizontal center line of the suspension bar, equidistant from each end and 1-11/32 inches ± 1/32 inch apart.

8. The suspension bar shall have two integral lugs. The lugs shall be equidistant from each end and 13/16 inch ± 1/64 inch on centers.

9. The use of any type of plastic packaging material is prohibited.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-2010-061)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:46Z
Check the source to verify that this is the current version before use.