
MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, FLEET RIFLEMAN, NAVY; PENDANT AND SUSPENSION BAR

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.



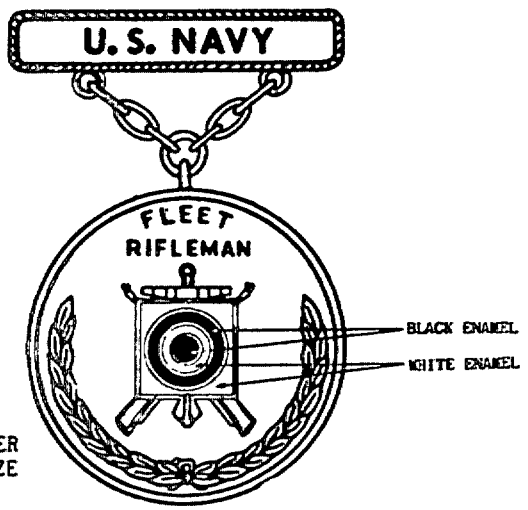

DASH NOS.
-1: GOLD
-2: SILVER
-3: BRONZE

MATERIAL:
PENDANT, SUSPENSION BAR:
-1: 1/10 10 KARAT GOLD FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)
-2: 1/10 SILVER FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)
-3: GILDING METAL

DIMENSIONS (INCHES):
PENDANT:
DIAMETER: 1.321 (REF)
THICKNESS (AT EDGE): -1,-2: .085 (REF)
-3: .085 (+.010, -.000)

SUSPENSION BAR:
HEIGHT (INCLUDING LUGS): 3/8 (REF)
WIDTH (OVERALL): 1-7/16 (REF)
THICKNESS (AT EDGE): .080 (+.010, -.000)

FINISH:
PENDANT:
OBVERSE:
-1: TARGET ENAMEL, GOLD PLATED, SATIN FINISH, HIGHLIGHTS AND RIM POLISHED
-2: TARGET ENAMEL, SILVER PLATED, SATIN FINISH, HIGHLIGHTS AND RIM POLISHED
-3: HIGHLIGHTS AND RIM POLISHED
REVERSE:
-1,-2,-3: MIRROR-LIKE POLISH

SUSPENSION BAR:
OBVERSE:
-1: GOLD PLATED, SATIN FINISH, HIGHLIGHTS AND RIM POLISHED
-2: SILVER PLATED, SATIN FINISH, HIGHLIGHTS AND RIM POLISH
-3: HIGHLIGHTS AND RIM POLISHED
REVERSE:
-1,-2,-3: MIRROR-LIKE POLISH

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:47Z
Check the source to verify that this is the current version before use.

NOTES:

1. THE LUG SHALL HAVE A MINIMUM OUTSIDE DIAMETER OF 5/32 INCH AND WIRE THICKNESS SHALL BE .044 INCH.

2. SUSPENSION LINKS SHALL BE 5/32 INCH IN WIDTH BY 3/16 INCH IN LENGTH AND FABRICATED FROM .044 INCH NOMINAL DIAMETER WIRE WITH SAME MATERIAL AND FINISH AS THE PENDANT BAR.

3. THE JUMP RINGS SHALL BE FABRICATED FROM .044 INCH NOMINAL DIAMETER WIRE OF THE SAME MATERIAL AS THE SUSPENSION BAR. THE RINGS SHALL HAVE AN OUTSIDE DIAMETER OF 3/16 PLUS OR MINUS 1/32 INCH.

4. THE ATTACHING DEVICE SHALL BE PRONG AND FLAT BALL TYPE CLUTCH CONFORMING TO FIGURE 2. WHITE METAL FLAT BALL CLUTCHES SHALL BE USED FOR DASH NO. 2 AND RED BRASS FLAT BALL CLUTCHES SHALL BE USED FOR DASH NOS. 1 AND 3. THE PRONGS SHALL BE CENTERED ON AND SOLDERED TO THE BACK OF THE SUSPENSION BAR. THE PRONGS SHALL BE LOCATED ON THE HORIZONTAL CENTERLINE OF THE BAR EQUIDISTANT FROM THE ENDS AND SHALL BE 1-11/32 INCHES IN APART. THE ATTACHING DEVICE SHALL BE FABRICATED FROM RED BRASS.

5. ENAMEL SHALL BE BLACK AND WHITE AS INDICATED. ENAMEL COLORS SHALL MATCH THE ENAMEL COLORS OF THE STANDARD OR APPROVED SAMPLE AND SHALL CONFORM TO THE TIOH COLOR CHIPS LISTED BELOW:

COLOR	CHIP NO.
WHITE	28
BLACK	26

6. THE SUSPENSION BAR SHALL HAVE TWO INTEGRAL LUGS. THE LUGS SHALL BE EQUIDISTANT FROM THE ENDS AND 13/16 INCH ON CENTERS.

Custodian:
Army - IH
Navy - NU

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:47Z
Check the source to verify that this is the current version before use.