MIL-C-16472G
9 August 1983
SUPERSEDING
MIL-C-16472F
15 August 1977

MILITARY SPECIFICATION

CAP, KNIT (WATCH)

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope This specification covers the requirements for a knitted wool watch cap, of one type and size only.

2. APPLICABLE DOCUMENTS

2.1 Government documents

* 2.1.1 Specifications and standards Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276 - Thread, Cotton
DDD-L-20 - Label; for Clothing, Equipage, and Tentage (General Use)

MILITARY

MIL-B-17757 - Box, Shipping, Fiberboard (Modular Sizes)
MIL-C-43665 - Cloth Wool: Mothproofing Treatment of

Beneficial comments (recommendations, additions, and deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8405

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-1491- Glossary of Knitting Imperfections

*2.1.2 Other Government documents, drawings, and publications The following other Government documents, drawings and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(copies of the manual may be obtained from the Superintendent of Documents US Government Printing Office, Washington, DC 20402).

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the the contracting officer).

*2.1.3 Order of precedence In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

2.2 Other Publications The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Department of Defense Standard Shades for Sewing Threads, 1968

(Application for copies shall be addressed to the Color Association of the United States, Inc., 24 East 38th Street, New York, New York 10016.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies shall be addressed to the American Trucking Association, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies shall be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

US DEPARTMENT OF AGRICULTURE

Methods of Test for Grade of Wool

(Application for copies should be addressed to the US Department of Agriculture, Agricultural Marketing Service, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 Standard sample. The finished knit watch cap shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3).

3.3 First article. When specified (see 6.2), the contractor shall furnish sample unit(s) for the first article inspection and approval (see 4.2 and 6.4).

3.4 Materials.

*3.4.1 Wool. The wool shall be fleece or pulled sheep's wool, or any combination thereof, not lower in grade than 54's US Standard. The wool shall be free of reprocessed, reused, or waste wool (see 4.3.1).

3.4.1.1 Yarn. The yarn used in the knitting and sewing (cover thread yarn) shall be of a two (2) ply worsted (see 4.3.1).

3.4.1.2 Mothproofing. The wool shall be mothproofed in accordance with MIL-C-43665 (see 4.3.1).

3.4.2 Knitted fabric. The knitted fabric for the crown and body portions of the watch cap, shall be circular knit continuously together utilizing either a simulated two ply or single ply construction process as shown in figures 1 and 2. The finished component sections of the watch cap shall conform to the physical requirements shown in Table I when tested as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

Table I - Physical requirements of knitted component parts

Component	Stitch Type	Wales per inch (min.)	Courses per inch (min.)
Simulated two ply process, when applicable:			
Body	Half cardigan	6	14
Crown	1 x 1 rib	6	14
Single ply process, when applicable:			
Body	Half or full cardigan	6	12
Crown	1 x 1 rib	9	14
Bottom	1 x 1 rib with non-raveling edge	6	12

3.4.3 Thread The thread for seaming and stitching the watch cap shall be cotton, conforming to type IC2, ticket no. A, 3-ply of V-T-276. The thread shall be dyed Black AA, Cable No. 66043.

3.4.3.1 Colorfastness The dyed thread shall show fastness to light, laundering (after 3 cycles), and perspiration equal to or better than the standard sample. When a standard sample is not available, the dyed thread shall show a minimum of "good" fastness to light, laundering (after 3 cycles), and perspiration. Testing shall be performed as specified in V-T-276.

3.4.4 Label Each knit watch cap shall have an identification label conforming to type VI, class 1 of DDD-L-20; except that the label shall bear the following inscription and shall show fastness to laundering only:

CAP, KNIT, WATCH (100% WOOL)
CONTRACT NO: DLA-100-00-0-0000 (EXAMPLE)
STOCK NO: 8405-00-000-0000 (EXAMPLE)
NAME OF CONTRACTOR:

3.5 Color. The color of the knit watch cap shall match Blue Shade 3346.

3.5.1 Matching. The color shall match the standard sample under artificial daylight having a color temperature of 7500 $\pm$ 500°K and shall be a good approximation to the standard sample under incandescent lamplight at 2800 $\pm$ 100°K.

3.5.2 Colorfastness. The dyed knit watch cap shall show fastness to light, laundering, perspiration, and crocking equal to or better than the standard sample. When a standard sample is not available, the dyed knit watch cap shall show a minimum of "good" fastness to light; laundering; perspiration; and a Munsell Value for crocking not lower than 6.5. Testing shall be performed as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

3.6 Nonfibrous material content. The starch and protein content, including chloroform-soluble and water-soluble material of the finished dyed watch cap, shall not exceed 3.0 percent when tested as specified in 4.4.

3.7 Design. The watch cap shall be bell shaped, pull over style. The crown shall be shaped of four (4) or six (6) equal sections as applicable, joined together by darts of equal length.

3.7.1 Figures. Figures 1 and 2 are furnished for information purposes only. When inconsistencies exist between the written specification and the figures, the written specification shall govern.

3.8 Construction

3.8.1 Stitch, seams and stitching types Stitch, seam, and stitching types as specified in table II, shall conform to FED-STD 751. Whenever two or more methods for seam or stitch types are given for the same part of the operation, any one of them may be used. Unless otherwise specified, edge-stitching and topstitching shall be not less than 1/16 inch from the edge.

3.8.2 Thread breaks and ends of seams. Ends of all seams and stitching, when not caught in other seams or stitching, shall be backtacked not less then 3/8 inch. Thread breaks (all stitch types), shall be secured by stitching back of the break not less than 1/2 inch, with the stitching superimposed and anchoring the ends of the break. Skipped stitches and thread breaks may be repaired by using 301 stitch type.

3.8.3 Stitches per inch The minimum and maximum number of stitches per inch shall be as specified in table II.

3.9 Manufacturing operations requirements The knit watch cap shall be manufactured in accordance with operation requirements specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

Table II - Construction of Knit Watch Cap

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch	Thread	
					Needle	Bobbin or Looper
1.	Assemble cap *a. Join the four (4) or six (6) equal sections of the crown as applicable with darts of equal length, simultaneously catching an edge of the specified cloth label in one of the dart seams. Each finished dart of equal length, shall extend from the top center of crown to not less than 1/4 inch nor more than 1/2 inch from beginning of body stitching. The label shall finish face side up with the printing clearly visible. b. Turn the cap inside out to its finished position.	504	SSa-1	8-12	A/3	A/3 2 ply worsted yarn
2.	Cleaning and pressing a. All ends of thread shall be trimmed and loose thread removed throughout the cap. b. Remove all spots and stains. c. Steam neatly over blocks.					

NCTR Form 1, 15 Sep 1967

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

3.10 Measurements. The finished knit watch cap shall conform to the dimensions specified in table III. All measurements and tolerances are expressed in inches and shall be made with the cap placed smooth and flat.

Table III - Finished measurements

Measurement	Dimensions	Tolerance
Simulated two ply process: 1/		
Overall length (A)	11 to 12 1/2	-
Width across bottom edge (B)	8	± 1/4
Height of crown (C)	2 1/2	± 1/4
Single ply process 2/		
Height of crown (A)	2 1/2	± 1/4
Height of rack stitch (B)	5/8	± 1/8
Overall length (C)	11 to 12 1/2	-
Width across bottom edge (D)	8 1/2	± 1/4

1/ For the simulated two ply process refer to figure 1 for the following points of measurement:

A. Measurement shall be taken from the top center point of crown to bottom open edge of watch cap.
B. Measurement shall be taken across the bottom open edge of watch cap.
C. Measurement shall be taken from the top center point of crown to bottom edge of crown (to rack stitching).

2/ For the single ply process refer to figure 2 for the following points of measurement:

A. Measurement shall be taken from the top center point of crown to bottom edge of crown (to rack stitching).
B. Measurement shall be taken from the bottom open edge of rack stitch to beginning of body stitching.
C. Measurement shall be taken from the top center point of crown to bottom open edge of rack stitching, with the cap folded in half lengthwise so as to lie flat.
D. Measurement shall be taken across the bottom open edge of watch cap.

3.11 Finished weight The finished weight of each knit watch cap shall be not less than 3 1/4 ounces (see 4.4).

3.12 Workmanship The finished knit watch cap shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection. When required, the first article submitted in accordance with 3.3, shall be inspected as specified in 4.3.2.1 and 4.3.2.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.3 Inspection Inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.3.1 Component and material inspection. In accordance with 4.1, components and material shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, a certificate of compliance shall be submitted for the wool requirements of 3.4.1, the worsted yarn requirements of 3.4.1.1, and the mothproofing requirements of 3.4.1.2.

4.3.1.1 Wool grade (scoured wool). The wool, when furnished in scoured form, shall be visually examined for grade prior to picking, carding, and dyeing by comparison with the applicable US Standard (see 2.2). In the event of a dispute, the wool grade shall be determined by a width (wedge) method approved by the Government. The examination for grade shall be performed on a composite sample of 1 pound for each 10,000 pounds or fraction thereof in the lot. The lot shall be unacceptable if the sample does not conform to the required grade specified in 3.4.1.

4.3.1.2 Wool grade (top form). The wool when furnished in top form, shall be visually examined for grade by comparison with the applicable US Standard (see 2.2). In the event of a dispute, the wool grade shall be determined by a width (wedge) method approved by the Government. The sample unit shall be one (1) yard of undyed top. The lot size shall be expressed in units of 1 pound. The sample size shall be as shown below, and the lot shall be unacceptable if one or more units fail to meet the required grade specified in 3.4.1.

Lot size (units)	Sample size
800 or less	2
801 thru 22,000	3
22,001 and over	5

4.3.1.3 In-process inspection. Inspection shall be made at any point and during any phase of the manufacturing process to assure that no reprocessed, reused, or waste wool is used (see 3.4.1). The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

4.3.2 Examination of the end item The defects found during the examination of the end item shall be classified in accordance with 4.3.2.1 and 4.3.2.2. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.3.2.3. The lot size shall be expressed in units of watch caps. The sample unit shall be one finished watch cap.

4.3.2.1 Visual examination The finished watch caps shall be examined for defects in design, material, construction, workmanship, and marking and the defects classified in accordance with the list below:

Defects	Classification Major	Minor
MATERIAL DEFECT(S) AND DAMAGE(S)		
a. Any size hole, cut, tear, smash, run or dropped stitch, missing yarn, or broken yarn	X	
b. Loose yarn, knot protruding from surface, thin place or uneven knitting, knitting in waste, visible mend, pulled thread or yarn, or slubby yarn more than twice the size of the normal diameter of the yarn.		X
c. Shade bar, dye streak, or area of no dye penetration		X
NOTE: For knitted fabric defect definitions, see MIL-STD-1491		
CLEANNESS		
a. Any spot or stain clearly noticeable		X
b. Two or more thread or yarn ends not trimmed, loose, or not removed		X
SHADED PART(S)		
Any part shaded or variation in shade within a part		X
COMPONENT(S) AND ASSEMBLY		
a. Any component part or operation omitted (unless otherwise classified herein)	X	
b. Any component not as specified (type, size, color, etc.)	X	
c. Any ravelling of rack stitching at bottom edge of cap, when applicable		X
d. Any operation not performed as specified (unless otherwise classified herein)		X
SEAMS AND STITCHING		
a. Seam puckered, irregular, twisted, pleated or wavy		X
b. Not specified seam or stitch type		X
c. Any open seam	X	
NOTE: The seam shall be classified as open when one or more broken stitches joining a seam are broken or when two or more continuous skipped or runoff stitches occur.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
SEAMS AND STITCHING (cont'd)		
d. Any line of stitching omitted, e.g., insertion of a dart seam	X	
e. Any line of stitching misplaced or not beginning or ending where specified, e.g., a dart not meeting at top center of crown		X
f. Any part of cap caught in an unrelated operation	X	
g. Stitches per inch more or less than specified		X
h. Loose tension resulting in a loose seam	X	
i. Tight tension (stitches break when normal strain is applied in the direction of the seam or stitching)	X	
CROWN		
a. Any section of crown visibly off-center		X
b. Any section of crown visibly unequal		X
DARTS		
a. Other than four (4) or six (6) as applicable	X	
b. Any dart seam extending from the top center of crown, finished less than 1/4 inch or more than 1/2 inch from beginning of body stitching		X
LABEL		
a. Omitted	X	
b. Misplaced, not attached as specified, or stitching through the printing		X

4.3.2.2 Dimensional examination The knit watch cap shall be examined for dimensional defects. Any dimension that is not within the established tolerance shall be classified as a defect (see 3.10).

4.3.2.3 Inspection levels and acceptable quality levels The inspection levels and acceptable quality levels (AQL's) expressed as defects per 100 units (DHU) for visual and dimensional examinations shall be as follows:

	Inspection level	AQL's Major	Total
For defects applicable to 4.3.2.1	II	2.5	6.5
For defects applicable to 4.3.2.2	S-4	-	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

4.3.3 Examination of packaging requirements An examination shall be made to determine that packaging, packing and marking comply with Section 5 requirements. Defects shall be scored in accordance with the list shown below. The sample unit shall be one shipping container fully packaged with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully packaged. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling.
	Bulged or distorted container.
Content	Number of caps per bundle is more or less than required. 1/

1/ For this defect, two bundles from each shipping container in the sample shall be examined.

4.3.4 Examination for palletization An examination shall be made to determine that the palletization complies with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully prepared for delivery. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified.
	Interlocking of loads not as specified.
	Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

4.4 Testing of the end item. The methods of testing specified in FED-STD-191 whenever applicable and as listed in table IV, shall be followed. The physical and chemical values specified in Section 3 apply to the average of the determinations made on a sample unit for test purposes as specified in the applicable test methods. All test reports shall contain the individual values utilized in expressing the final results. The lot size shall be expressed in units of one (1) knit watch cap each. The sample size shall be as specified in 4.3.1.2. The sample unit shall be two (2) knit watch caps. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified.

Table IV - End item tests

Characteristic	Requirement Paragraph	Test Method
Knitted fabrics:		
Stitch type for each part	3.4.2	Visual 1/
Wales per inch for each part	3.4.2	5070
Courses per inch for each part	3.4.2	5070
Colorfastness to:		
Light	3.5.2	5660
Laundering	3.5.2	5614
Perspiration	3.5.2	5680
Crocking	3.5.2	5651
Nonfibrous material	3.6	2611
Weight	3.11	2/

1/ One determination shall be performed on each part, and the results reported as "pass" or "fail".
2/ A knit watch cap shall be allowed to reach equilibrium under standard conditions as defined in FED-STD-191. When under standard conditions, the cap shall be weighed to the nearest 1/4 ounce.

5. PACKAGING

5.1 Preservation-packaging Packaging shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A Ten (10) knit watch caps shall be neatly flattened and stacked one on top of the other with every fifth (5) cap reversed to form a bundle. Each bundle shall be securely tied around the girth with cotton twine or cloth tape, approximately 2 1/2 inches from each end. The finished bundle shall be approximately 11 inches in length, 4 inches in width, and 6 3/4 inches in depth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial Knit watch caps shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The contractor may use standard practice when it meets this requirement. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing Packing shall be level A, B, or Commercial as specified (see 6.2).

*5.2.1 Level A. Sixty (60) knit watch caps (6 bundles of 10 each), packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed, and reinforced conforming to type CF, variety DW, class weather-resistant, grade V15c, size 2A of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic variety SW or DW, grade 200 of MIL-B-17757. Level A packages shall be packed two (2) bundles in length, three (3) bundles in width and one (1) in depth. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of commercial grade kraft paper.

* 5.2.2 Level B. Sixty (60) knit watch caps (6 bundles of 10 each), packaged as specified in 5.1, shall be packed in a fiberboard shipping container assembled and closed conforming to type CF, class domestic, variety DW, grade 200, size 2A, of MIL-B-17757. The fiberboard for the box liner shall conform to type CF, class domestic, variety SW or DW, grade 200 of MIL-B-17757. Level B packages shall be packed two (2) bundles in length, three (3) bundles in width and one (1) in depth. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of commercial grade Kraft paper.

5.2.3 Commercial Knit watch caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.

5.3 Palletization When specified (see 6.2), caps packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.4 Marking In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The knit watch cap is intended to be worn by Naval and Air Force personnel.

6.2 Ordering data. Procurement should specify the following:

a. Title, number, and date of this specification.
b. When a first article sample is required (see 3.3 and 6.4).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
d. When palletization is required (see 5.3).

6.3 Samples For access to samples, address the procuring activity issuing the invitation for bids.

* 6.4 First article. When a first article is required, it shall be inspected and approved. The first article shall be a preproduction sample. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

* 6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire contents irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU
Air Force - 99

Review activity:
Navy - MC
DLA - CT
Air Force - 82

User Activity:
Air Force - 45

Preparing activity:
Navy - NU

Project No. 8405-0922

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

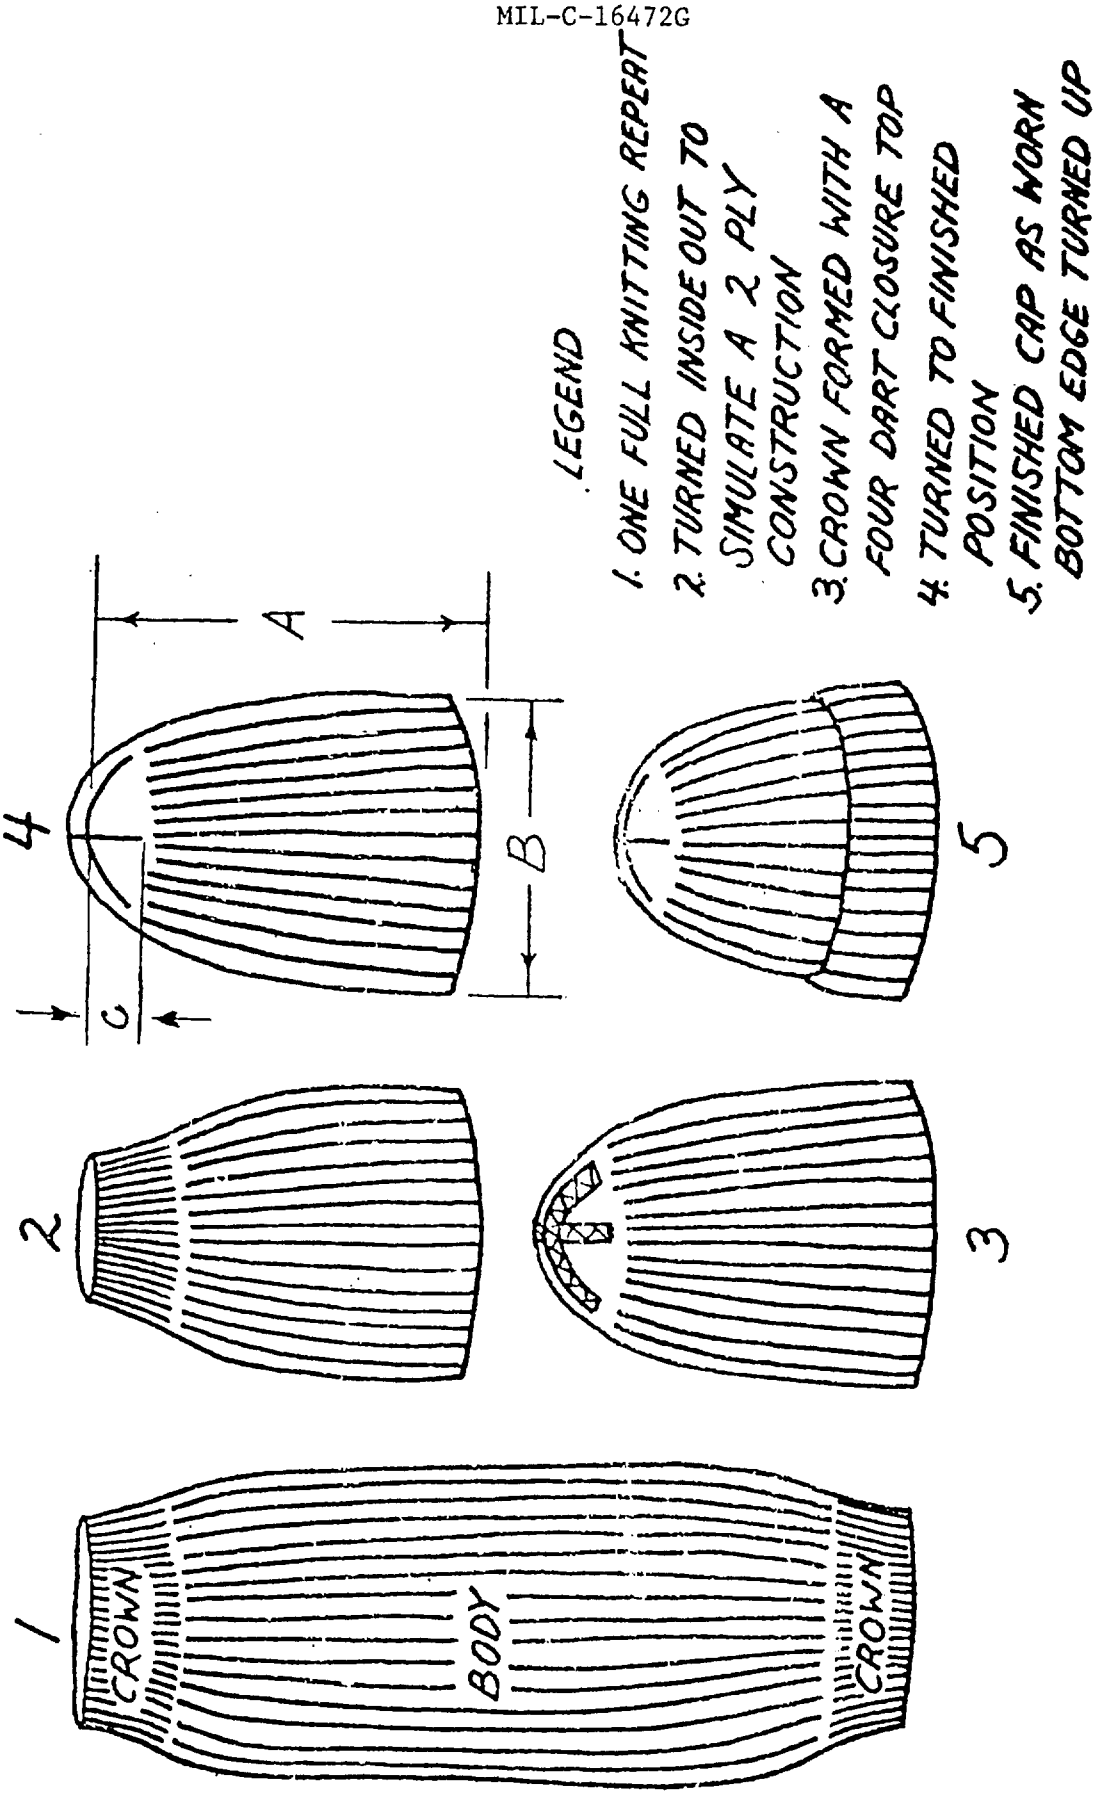


FIGURE 1 - SIMULATED 2 PLY CONSTRUCTION KNIT WATCH CAP

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

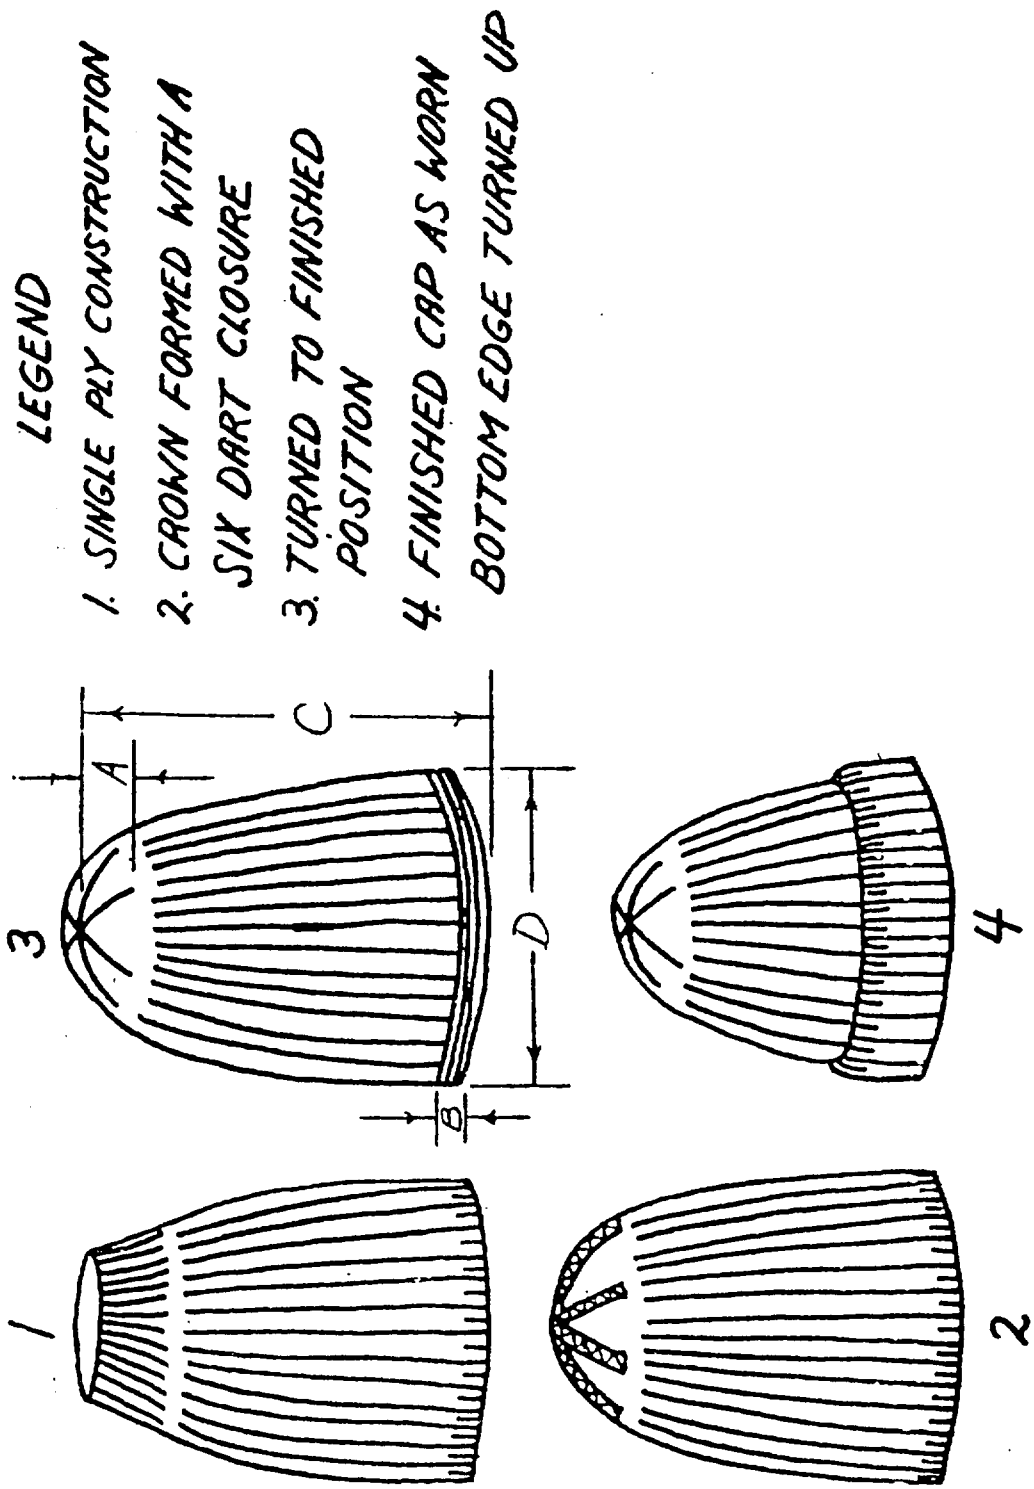


FIGURE 2. SINGLE PLY CONSTRUCTION KNIT WATCH CAP

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
(Code 50)
21 Strathmore Road
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:02Z
Check the source to verify that this is the current version before use.