
MIL-D-16475/50A(CG)
23 SEP 1988
SUPERSEDING
MIL-D-16475/50(SA)
12 July 1974

MILITARY SPECIFICATION SHEET
DEVICES, METAL, (BREAST AND COLLAR)
COMMAND AT SEA (U.S. COAST GUARD)

This specification sheet is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the insignia described herein shall consist of this document and the latest issue of Specification MIL-D-16475.

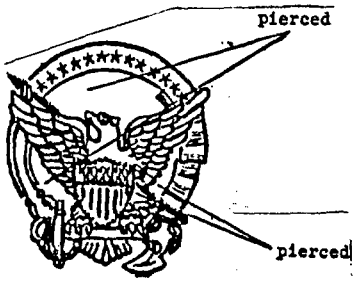

Size:	Regular and Miniature
Material:	Brass
Design:	Approved sample
Color:	Shield - Silver Balance of design - Gold

Guide Sample: Available for finish and workmanship.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer In Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, Ma. 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:06Z
Check the source to verify that this is the current version before use.

Dimensions (inches):	Regular (overall)	Miniature (overall)
Width of shield	1/2	7/32
Height of shield	9/16	1/4
Width of device	1 9/16	11/16
Height of device	1 3/4	13/16
Overall length of Anchor and Fouling	1 3/16	1/2
Tolerance (inches):	± 1/32	± 1/32

Thickness: (at thickest point):
Regular - .155 inch (minimum) at center of shield.
.125 inch (minimum) at fouling at flukes of anchor.

Miniature - .123 inch (minimum) at center of shield.
.080 inch (minimum) at fouling at flukes of anchor.

Finish:
Shield - Matte finish, polished highlights and lacquered.

Balance of design - 24 Karat Gold Electroplated, satin relieved finish, polished highlights and lacquered.

Forcer:
Regular - Partial forcer permitted.

Miniature - No forcer permitted.

Placement of Attachment:
Regular - Three prongs and three clutch fasteners are required. Two prongs shall be positioned onto the eagle wings, 5/16 inch from the edge of the device and measuring between their centers 1 (± 1/32) inch. The third prong shall be centered on the bottom vertical dimension, 1/16 inch from the edge and measuring 1 1/16 inch from the centers of the prongs previously described.

Miniature - Two prongs and two clutch fasteners are required. The prongs shall be centered onto the longest horizontal dimension equidistant from each end and measuring between their centers 9/16 (± 1/32) inch.

Where used: Qualification breast device for officers.

Note:
1. Shield shall be hard soldered to breast of eagle.
2. The figure is for information purposes only.
3. Packaging and packing shall be standard commercial practice.

Custodian:
Navy - NU

Review Activity:
DLA-CT

User Activity:
Navy - CG

Preparing Activity:
Navy - NU

Project No. 8455-N319

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:06Z
Check the source to verify that this is the current version before use.