
MIL-D-16475/55A(CG)
23 SEP 1988
SUPERSEDING
MIL-D-16475/55(SA)
26 February 1976

MILITARY SPECIFICATION SHEET
DEVICES, METAL, (BREAST AND COLLAR)
AUXILIARY AUXOP, QUALIFICATION (U.S. COAST GUARD)

This specification sheet is approved for use by the United States Coast Guard, Department of Transportation, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the insignia described herein shall consist of this document and the latest issue of Specification MIL-D-16475.

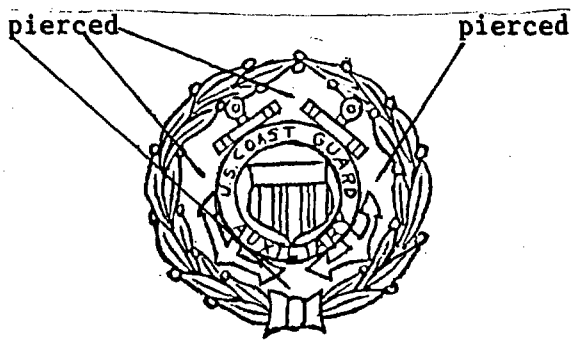

Size:	Regulation
Material:	Gilding Metal, Brass and Specified Vitreous Enamels
Design:	Government Hub
Color:	Wreath - Silver Shield - Gold and Blue

Guide Sample: Available for finish and workmanship.

Dimensions (inches):	Regulation (overall)
Diameter	7/8
Tolerance (inches):	± 1/32

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer In Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, Ma. 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:06Z
Check the source to verify that this is the current version before use.

Thickness: (at thickest point): Wreath - 0.060 inch (minimum).
Shield - 0.071 inch (minimum) measured at center of device.

Finish: Wreath - Bright Rhodium plating.
Shield - 24 Karat Gold Electroplated, mirror-like polish and lacquered.

Vitreous Enameled Colors: (Shield) Blue - TIOH Color Chip No. 18. The blue enamel shall be vitreous blue hard enamel. The blue enamel shall be the background color where the letters "U.S. COAST GUARD AUXILIARY" appear and shall be level with the dikes and conform to the requirements specified for enameling in the basic specification.

Construction: Shield hard soldered to wreath at four locations.

Forcer: No forcer permitted.

Placement of Attachment: Two prongs and two clutch fasteners are required. The prongs shall be centered onto the longest horizontal dimension equidistant from each end and measuring between their centers 3/4 (± 1/32) inch.

Where used: U.S. Coast Guard Auxiliary Personnel breast device.

Note: 1. The figure is for information purposes only.

2. Packaging and packing shall be standard commercial practice.

Custodian:
Navy - NU

Review Activity:
DLA-CT

User Activity:
Navy - CG

Preparing Activity:
Navy - NU

Project No. 8455-N319

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:06Z
Check the source to verify that this is the current version before use.