
INCH-POUNDS

MIL-D-16475/68C(CG)
19 September 1989
SUPERSEDING
MIL-D-16475/68B(NU)
11 January 1989

MILITARY SPECIFICATION SHEET
DEVICES, METAL, BREAST AND COLLAR
COMMAND ENLISTED ADVISOR (U.S. COAST GUARD)

This Specification sheet is approved for use by the U.S. Coast Guard, Department of Transportation and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the insignia described herein shall consist of this document and the latest issue of Specification MIL-D-16475.

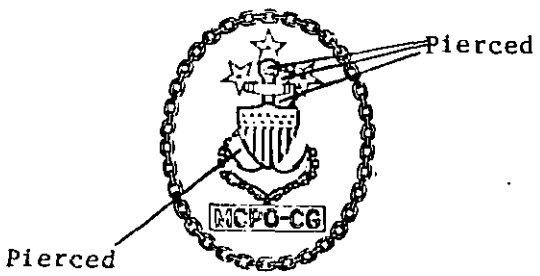

Size:	Regular and miniature
Types:	Type I - Breast badge with gold background disc
	Type II - Breast badge with silver background disc
Material:	Brass
Design:	Government hub

Guide sample: Available for finish and workmanship.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, Ma. 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:08Z
Check the source to verify that this is the current version before use.

Color:

Regular size - Type I - Oval disc and anchor: Gold
- Shield, stars and qualification panel: Silver

Type II - Anchor: Gold
- Oval disc, shield stars and qualification panel: Silver

Miniature size - Type I - All Gold

Type II - Anchor: Gold
- Oval disc, shield, stars and qualification panel: Silver

Dimensions (inches)	Regular (overall)	Miniature (overall)
Oval disc		
Width	1-3/8	11/16
Height	1-3/4	7/8
Tolerance	± 1/32	± 1/32
Anchor and fouling		
Width	21/32	-
Height	1	-
Tolerance	± 1/32	-
Anchor assembly		
Width	-	7/16
Height	-	9/16
Tolerance	-	± 1/32
Stock		
Width	3/8	3/16
Height	3/32	1/16
Tolerance	± 1/32	± 1/32
Flukes and fouling		
Width	11/16	5/16
Height	3/8	5/32
Tolerance	± 1/32	± 1/32
Shield		
Width	3/8	3/16
Height	1/2	1/4
Tolerance	± 1/32	± 1/32
Panel		
Width	3/4	13/32
Height	3/16	3/32
Tolerance	± 1/32	± 1/32

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:08Z
Check the source to verify that this is the current version before use.

Dimensions (inches) (cont'd)	Regular (overall)	Miniature (overall)
Star		
Diameter	5/16	1/8
Tolerance	± 1/32	± 1/32

Forcer: No forcer permitted.

Finish:

Regular size - Type I

Oval disc	- 24 Karat Gold Electroplated, matte relieved finish, chain border, mirror-like polish.
Anchor	- 24 Karat Gold Electroplated, mirror-like polish.
Stars and Shield	- Silver plated, Rhodium Electroplated.
Qualification panel	- Silver plated, oxidized relieved satin finish.
Completely assembled badge	- Lacquered on all sides.

Regular size - Type II

Oval disc	- Silver plated, matte relieved finish, chain border, mirror-like polish.
Anchor	- 24 Karat Gold Electroplated, mirror-like polish.
Stars and Shield	- Silver plated, Rhodium Electroplated.
Qualification panel	- Silver plated, oxidized relieved satin finish.
Completly assembled badge	- Lacquered on all sides.

Miniature size - Type I

Oval Disc	- 24 Karat Gold Electroplated, matte relieved finish, chain border mirror-like polish.
Anchor, Stars and Shield	- 24 Karat Gold Electroplated, mirror-like polish.
Qualification panel	- 24 Karat Gold Electroplated, matte relieved finish, raised lettering, mirror-like polish and hand burnished.
Completely assembled badge	- Lacquered on all sides.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:08Z
Check the source to verify that this is the current version before use.

Miniature size - Type II

Oval Disc	- Silver plated, matte relieved finish, chain border mirror-like polish.
Anchor	- 24 Karat Gold Electroplated, mirror-like polish.
Stars and Shield	- Silver plated, rhodium plated.
Qualification panel	- Silver plated, rhodium plated, oxidized relieved satin finish.
Completely assembled badge	- Lacquered on all sides.

Assembly:

Regular - All components shall be hand-soldered or riveted to the oval disc in accordance with positions on approved sample.

Miniature - All components shall be hand-soldered to the oval disc in accordance with positions on approved sample. Stars should be dapped to the oval disc.

Placement of attachment:

Regular - Three prongs and three clutch fasteners are required. Two prongs shall be positioned horizontally onto the back side of the oval disc, 3/32 (± 1/32) inch from the edge of the device, and 9/16 (± 1/32) from the top of the device and measuring between their centers 15/16 (± 1/32) inch. The third prong shall be centered on the bottom vertical dimension, 3/32 (± 1/32) inch from the edge of the device and measuring 1 9/32 (± 1/32) inch from the centers of the prongs previously described.

Miniature - Two prongs and two clutch fasteners are required. The prongs shall be positioned vertically onto the back side of the oval disc, equidistant from each end and measuring between their centers 23/32 (± 1/32) inch.

Where used: Identification Breast Device for Coast Guard enlisted personnel serving in the capacities of Master Chief Petty Officer of the Coast Guard and Command Enlisted Advisor. The badge shall be regular size and miniature size for E-10 and E-9.

Custodian:
Navy - NU

Preparing Activity
Navy - NU

Review Activity
DLA-CT

Project No. 8455-N408

User Activity:
Navy - CG

Source: https://assist.dla.mil -- Downloaded: 202640-18T09:08Z
Check the source to verify that this is the currentversion before use.