INCH POUND


MIL-D-16475/68D
06 January 1992

SUPERSEDING
MIL-D-16475/68C(CG)
19 September 1989

MILITARY SPECIFICATION SHEET
DEVICES, METAL, BREAST AND COLLAR
COMMAND ENLISTED ADVISOR (U.S. COAST GUARD)

This specification sheet is approved for use by the U.S. Coast Guard, Department of Transportation and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the insignia described herein shall consist of this document and the latest issue of Specification MIL-D-16475.

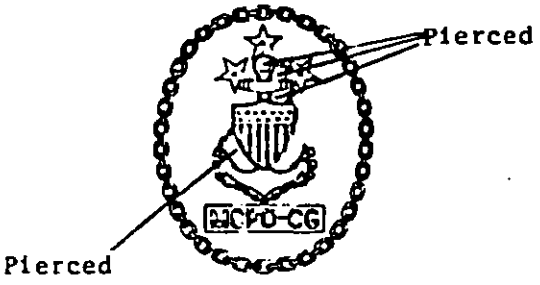

Size: Regular and Miniature

Types: Type I - Breast badge with gold background disc

Type II - Breast badge with silver background disc

Material: Brass

Design: Government Hub

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:08Z
Check the source to verify that this is the current version before use.

Color:

Regular size - Type I - Oval disc and anchor: Gold
- Shield, stars and qualification panel: Silver

Type II - Anchor: Gold
- Oval disc, shield, stars and qualification panel: Silver

Miniature size - Type I - All Gold

Type II - Anchor: Gold
- Oval disc, shield, stars and qualification panel: Silver

Dimensions (inches):	Regular (overall)	Miniature (overall)
Oval disc		
Width	1-3/8	11/16
Height	1-3/4	7/8
Tolerance	± 1/32	± 1/32
Anchor and fouling		
Width	21/32	-
Height	1	-
Tolerance	± 1/32	-
Anchor assembly		
Width	-	7/16
Height	-	9/16
Tolerance	-	± 1/32
Stock		
Width	3/8	3/16
Height	3/32	1/16
Tolerance	± 1/32	± 1/32
Flukes and fouling		
Width	11/16	5/16
Height	3/8	5/32
Tolerance	± 1/32	± 1/32
Shield		
Width	3/8	3/16
Height	1/2	1/4
Tolerance	± 1/32	± 1/32

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:08Z
Check the source to verify that this is the current version before use.

Dimensions (inches):	Regular (overall)	Miniature (overall)
Panel		
Width	3/4	13/32
Height	3/16	3/32
Tolerance	± 1/32	± 1/32
Star		
Diameter	5/16	1/8
Tolerance	± 1/32	± 1/32

Forcer: No forcer permitted.

Finish:

Regular size - Type I

Oval disc	- 24 Karat Gold Electroplated, matte relieved finish, chain border, mirror-like polish.
Anchor	- 24 Karat Gold Electroplated, mirror-like polish.
Stars and Shield	- Silver plated, Rhodium Electroplated.
Qualification panel	- Silver plated, oxidized relieved satin finish.
Completely assembled badge	- Lacquered on all sides.

Regular size - Type II

Oval disc	- Silver plated, matte relieved finish, chain border, mirror-like polish.
Anchor	- 24 Karat Gold Electroplated, mirror-like polish.
Stars and Shield	- Silver plated, Rhodium Electroplated.
Qualification panel	- Silver plated, oxidized relieved satin finish.
Completely assembled badge	- Lacquered on all sides.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:08Z
Check the source to verify that this is the current version before use.

Miniature size - Type I

Oval disc	- 24 Karat Gold Electroplated, matte relieved finish, chain border, mirror-like polish.
Anchor, Stars and Shield	- 24 Karat Gold Electroplated, mirror-like polish.
Qualification panel	- 24 Karat Gold Electroplated, matte relieved finish, raised lettering, mirror-like polish and hand burnished
Completely assembled badge	- Lacquered on all sides.

Miniature size - Type II

Oval disc	- Silver plated, matte relieved finish, chain border, mirror-like polish.
Anchor	- 24 Karat Gold Electroplated, mirror-like polish.
* Stars and Shield	- 24 Karat Gold Electroplated, mirror-like polish.
* Qualification panel	- Soldered on Oval Disc, Silver Plated, matte finished, letters mirror-like polished.
Completely assembled badge	- Lacquered on all sides.

Assembly:

* Regular - All components shall be hand-soldered or riveted to the oval disc.

* Miniature - Qualification panel shall be hand-soldered to the oval disc. CPO Devices E-7, E-8, and E-9 after finishing is complete should be swaged to finished oval disc.

Source: https://assist.dla.mil -- Downloaded: 202610-18T09:08Z
Check the source to verify that this is the current version before use.

Placement of attachment:

Regular - Three prongs and three clutch fasteners are required. Two prongs shall be positioned horizontally onto the back side of the oval disc, 3/32 (± 1/32) inch from the edge of the device, and 9/16 (± 1/32) from the top of the device and measuring between their centers 15/16 (± 1/32) inch. The third prong shall be centered on the bottom vertical dimension, 3/32 (± 1/32) inch from the edge of the device and measuring 1-9/32 (± 1/32) inch from the centers of the prongs previously described.

Miniature - Two prongs and two clutch fasteners are required. The prongs shall be positioned vertically onto the back side of the oval disc, equidistant from each end and measuring between their centers 23/32 (± 1/32) inch.

*Where used: Identification Breast Device for Coast Guard enlisted personnel serving in the capacities of Master Chief Petty Officer of the Coast Guard and Command Enlisted Advisor. The badge shall be regular size and miniature size for E-9.

*Note: For access to samples, address the procuring activity issuing the invitation for bids.

Custodian:
CG - CT

Preparing Activity:
DLA - CT

Project No. 8455-0630

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T09:08Z
Check the source to verify that this is the current version before use.