MIL-S-82529(OS)
18 April 1986
Superseding
NOTS XS 412 Rev. H
29 September 1967

MILITARY SPECIFIC ATION
FOR
SWITCH, THERMAL
MARK 56 MOD1

This specification has been approved by the Naval Ordnance Systems Command, Department of the Navy

1. SCOPE

1.1 This specification establishes the requirements ofone type of Thermal Switch Mark56 Mod 1. (See 6.1 for intended use and description.)

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on the date of invitation for bids, form apart of this specification to the extent specified herein, except as noted.

SPECIFICATION

FEDERAL

PPP-B-621	Boxes, Wood, Nailed and Lock Corner

MILITARY

MIL-P-116	Preservation, Methods of
MIL-L-10547	Liners, Case, and Sheet, Overwrap: Water-VaporProof or Waterproof, Flexible
MIL-S-21568	Silicone Fluid. Dimethyl Poiysiloxane

FSC-1340

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-102	Preservation, Packaging, and Packing Levels

MILITARY

MIL-STD-105D	Sampling Procedures and Tables for Inspection by Attributes
MI L-STD-129″	Marking for Shipment and Storage
MIL-STD-167	Mechanical Vibrations of Shipboard Equipment

DRAWINGS

Bureau of Naval Weapons

LD 540562	Switch, Thermal Mark 56 Mod l, and all documents listed thereon

(Copies of specifications, standards, drawings, and publications requested by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. Unless otherwise specified in the contract or order, all materials and treatments of materials and parts used in the manufacture of the switch shall be in accordance with the requirements specified herein and with the applicable documents listed in BuWeps LD 540562.

3.2 Preproduction samples. Unless otherwise specified in the contract or order, preproduction samples of the switch shall be manufactured using the methods and procedures proposed for production. The sample shall be tested as specified in Section 4 herein and is for the purpose of determining that prior to starting production, the contractor's production methods are capable of yielding items that comply with the technical requirements of the contract.

3.3 Performance and product characteristics. The switch shall meet the following performance and product characteristics.

3.3.1 Insulation resistance. After being conditioned at a temperature of 75 plus or minus 5 degrees Fahrenheit (F) and a relative humidity of 75 plus or minus 5 percent for a period of not less than twenty-four hours, the insulation resistance shall not be less than 100 megohms. When the insulation resistance is measured during or subsequent to the environmental tests specified in

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.5 there shall be no temperature or humidity conditioning other than that required by the individual environmental test and the insulation resistance shall then be 20 megohms minimum. The test potential shall be 500 plus or minus 50 volts DC. The insulation resistance shall be measured between the following mutually insulated points:

a. Case
b. Each of the three independent normally closed circuits.

3. 3.2 Electrical continuity and circuit resistance. The three independent, normally closed circuits shaI1 be continuous and each individual circuit resistance shall be less than O. 10 ohm.

3. 3.3 Function. The switch shall maintain electrical continuity of the three independent circuits at temperatures less than plus 165 degrees F and shall break continuity of these circuits within 12 minutes at a temperature of plus 240 degrees F. After interrupting the circuits, the switch shall maintain all circuits permanently open without electrical continuity under the conditions specified in 4.6. 2.3.3.

3.4 Environmental requirements, Unless otherwise specified, the switch shall be capable of conforming to the performance and product characteristics of this specification after being exposed to the environments and all conditions specified herein

:1.4.1 Temperature.

3.4.1. 1 storage condition. The switch shall withstand temperatures from minus [i.; (o plus 160 degrees F.

304.2 Vibration.

3. 4.2. I Standby condition. The switch shall withstand vibration as specified for Type 1 equipment in MIL-STD- 167 up to 25 cycles per second (cps).

:j*q*~*~ Operating condition. The switch shall withstand vibration through a frequency range of 20 to 2000 cps at O. 10-inch double amplitude or I0g (g unit of gravitational acceleration), whichever is less, The switch circuits shall remain closed during vibration and thereafter the switch shall meet the performance and product characteristics of this specification.

3.4.3 Shock.

3.4.3 1 Standby condition. The switch shall withstand shocks of 40g peak magnitude. The shock shall have a pulse shape approximate ing a one-half sine wave having a duration of 5 milliseconds.

3.4.3.2 Operating condition.

3.4.3. 2.1 Major. The switch shall withstand a shock of 2400g peak magnitude in the direction shown in Figure 1. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 millisecond. Thereafter the switch shall meet the performance and product characteristics of this specification, except for the functional requirement of 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026t0-23T07:13Z
Check the source to verify that this is the currenversion before use.

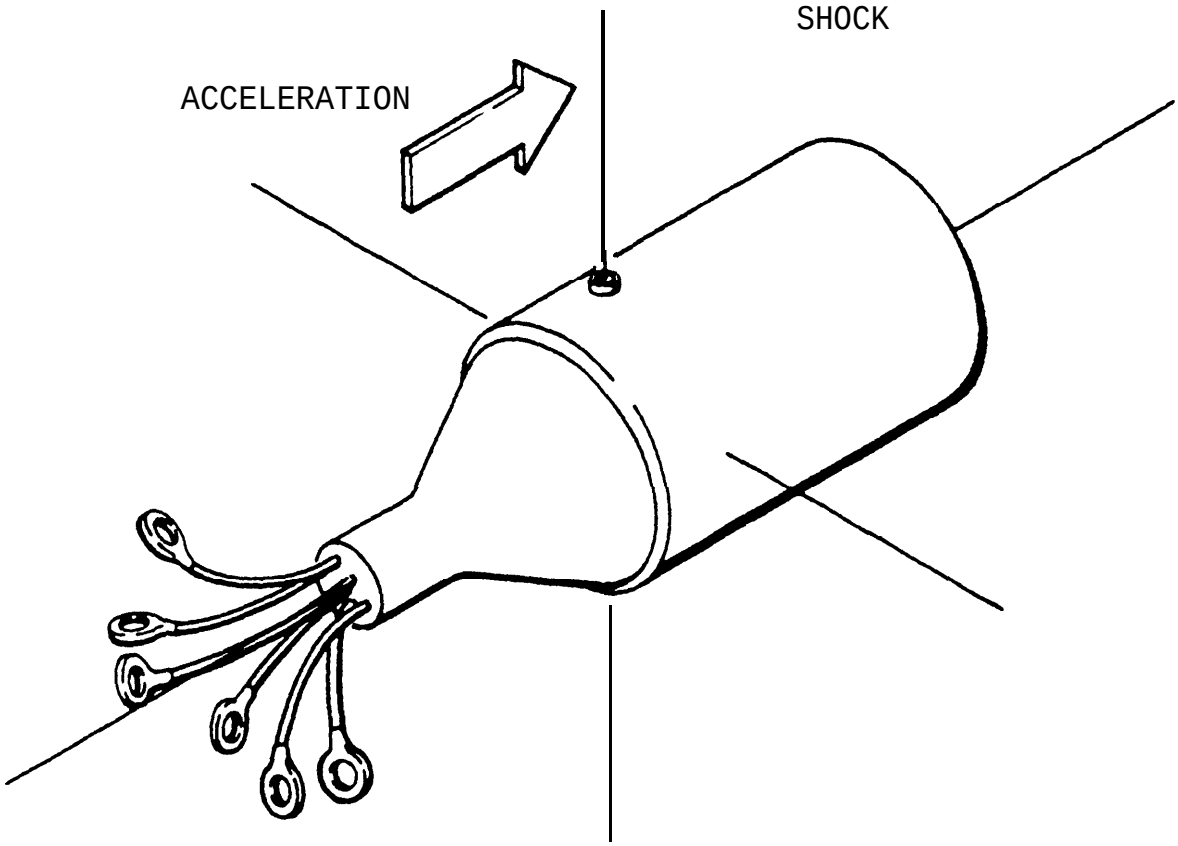


Figure 1. Environmental Testing Axes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

3.4.3.2.2 Minor. The switch shall withstand two shocks of 1200g peak magnitude 90 degrees apart and perpendicular to the major shock axis. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 millisecond. Thereafter the switch shall meet the performance and product characteristics of this specification except for the functional requirement of 3.3.3.

3.4.4 Acceleration. The switch shall withstand an acceleration of 25g for 4 seconds applied in the direction shown in Figure 1. The switch circuits shall remain closed during acceleration and thereafter the switch shall meet the performance and product characteristics of this specification.

3.4.5 Current capacity. The three independent circuits of the switch shall be capable of carrying a continuous direct current of 1 ampere between the two White leads and 15 ampress between the Brown lead and Orange lead, and between the Blue lead and Green lead.

3.5 Work manship The workmanship and finish shall be of sufficiently high grade to aussure satisfactory operation consistent with the requirements of this specification All parts used in the assembly shall be thoroughly clean and free of exeess materials chips, and loose or splattered foreign materials. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. Quality ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the suppli - er may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to as - sure' supplies and services conform to prescribed requirements.

4.2 Classification of inspection. Inspection of the switch shall be classi - fied as follows:

a Preproduction and periodic production inspection (See 4.5.)

b. Quitlity conformance inspection. (See 4.6.)

4.3 Sampling. (See 6.2. 1.)

4. 3.1 Lot size. The term "lot" shall mean "inspection lot", that is a collection of product submitted by a supplier for inspection. Unless otherwise specified in the contract or order the number of product in each lot shall be three hundred (300).

4.3.2 Preproduction sample. A preproduction sample of ten (10) switches, manufactured in accordance with 3.2, shall be subjected to the preproduction tests

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

detailed in 4.5. Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the switch by the supplier, prior to approval of the preproduction sample, shall be at the supplier's risk.

4.3.3 Peiodic product sample, From each succeeding lot of three hundred (300) or less, a random sample of ten (10) switches shall be selected These sample units shal 1 be subjected to the tests of 4.5, The switches shall be considered satisfactory if they meet all specification and pertinent drawing requirements and withstand the tests specified in 4.5. (See Table 1.) When a defective unit is found in any lot, acceptance of all units in the lot shall be withheld and the contractor shall:

a. Determine the cause of the defect.

b. Take the necessary action, with the concurrence of the procuring activity, to correct or eliminate the defect from all units in the lot and, if so directed by the procuring activity, from those units previously shipped.

co Submit to the procuring activity for approval, the proposed cor - rective action to prevent recurrence of the dcfect.

4.3.4 Quality conformance inspection sampling, Samples, selected as speci - fied in 4.6 shall be used to determine the acceptability of the switch when inspected as specified in 4.6.

Table 1. Preproduction and Periodic Production Test Sequence

Test	Paragraph Number	Test Quantities Preproduction	Perodic
Quality Conformance Inspection	4.6*	10	10
Temperature, Storage Condition	4.5. 1.1	10	10
Current Capacity	4.5.1.7	10	10
Quality Conformance Inspection	4.6	3**	3**
Vibration, Standby Condition	4.5. 1.3	7	7
Shock, Standby Condition	4.5. 1.5	7	7
Quality Conformance Inspection	4.6	3**	3**
Acceleration	4.5. 1.2	4	4

* Except for temperature functioning 4.6.2.3.2 and attitude after functioning 4.6.2.3.3.

** These switches are expended during quality Conformance tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Table 1. Preproduction and Periodic Production Test Sequence (Continued)

Test	Paragraph Number	Test Quantities Preproduction	Periodic
Vibration, Operating Condition	4.5. 1.4	4	4
Quality Conformance Inspection	4.6	2**	2**
Shock, Operating Condition	4.5. 1.6		
Major	4.5. 1.G.1	2	2
Minor	4.5. 1.6,2	2	2
Quality Conformance Inspection	4.6***	2	2

These switches are expended during quality conformance tests.

***Except for the functioning tests of 4.6.2.3.

4.4 Test Equipment.

4.4.1 Quality conformance inspection equipment. The following items of test equipment are required to perform the quality conformance inspection tests:

Equipment	Capability
a. Low resistance measuring device	0 to 0. 10 ohm; accuracy 5 percent
b. Conditioning chamber	Maintain temperature at plud 75 plus or minus 5 degrees F and a relative humidity of 75 plus or minus 5 percent.
c. Megohmmeter	0,00 to 100 megohms; accuracy 10 percent at 20 and 100 megohms with 500 plus or minus 50 volts DC potential
d. Temperature chamber	Maintain temperature at 165 plus 0 minus 5 degrees F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Equipment	Capability
e. Constant temperature oil bath with immerson type heater and proportional type temperature holding control; minimum fluid capacity of 6 gallons	Maintain fluid temperature at 240 plus 5 minus O degrees F, Provide means of supporting 3 therm ometers$ an oil stirrer, and the switch in the positions shown in Figure 2, Heating element shall be located so that distance between heating element and the switch is not less than 2 inches.
f. Heating oil	Silicone fluid, dimethyl polyslloxane as specified in MIL-S-2 1568; viscosity of 50 centistokes at 77 degrees F; FSN 91506640047
g. Stirrer	Conform to Figure 3,
h. Stirrer drive unit	Maintain stirrer rotation at 200 plus or minus 25 rpm.
i. Three calibrated precision the rmometers (not total immersion type)	Measure temperature from 230 to 250 degrees F with an accuracy of plus or minus 0.3 degrees F.
j. Calibrated timer	Measure O to 15 minutes with accuracy of plus or minus 5 seconds.
k. High temperature chamber	Maintain temperature at 400 plus or minus 20 degrees F.

4.4,2 Preproduct ion and Periodic production test equipment. The following items of test equipment in addition to selected items of quality conformance inspection equipment, and pieces of equipment recoin mended by applicable spec ificat ions or standards referenced within test procedure paragraphs, are required to perform the preproduction and periodic production tests:

Equipment	Capabilty
a. Temperature chamber	Maintain temperature at: Minus 65 plus 5 minus O degrees F Plus l6O plus O minus 5 degrees F

Source: https://assist.dla.mil -- Downloaded: 2026t0-23T07:13Z
Check the source to verify that this is the currentversion before use.

Equipment	Capability
b. Vibration testing machine	Control frequency from 20 cps to 2000 cps while subjecting a test item to O. 10-inch double amplitude or 10g acceleration, whichever 1s less; maitain direction of vibration along specified axes.
c, Shock, equipment, standby	Apply shocks of 40 plus or minus 4g; a one-half sine wave pulse shape having a time duration of 5 plus 3 minus O milliseconds; maintain direct ion along specified axes.
d. Shock equipment, operating	Apply shocks of up to 2400g plus or minus 10 percent; a one-half sine wave pulse shape of 1 plus or minus 0.25 millisecond time duration; maintain direction along specified axes.
e. Centrifuge	O to 27. 5g; maintain acceleration at 25 plus 2.5 minus Og,
f, DC power supply current regulated	Regulate direct current at 15 PIUS O minus 2 amperes, and 1 plus 0.0 m lnus O. 1 ampere through test item load (O. 10 ohm maximum).
g. Voltmeter	0 to 1,5 volts, and O to 0.5 volt DC; accuracy plus or minus 3 percent

4.5 PreProduction and periodic production inspections. The preproduction and periodic production samples shall be subjected to the tests specified in 4,5.1 after satisfactorily passing the quality conformance inspections of 4.6.2.1, 4.6.2.2, 4.6.2.3.1, and 4.6.2,4.

4.5.1 Test procedure. Subject the switch to the test sequence listed in Table I. Unless otherwise specified in the individual test paragraph, the quality conformance inspection as specified in Table I shall be performed susbsequent to environmental tests under test conditions specified in 4.6.1. Failure of the switch to pass any one of these tests shall constitute a defective unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.


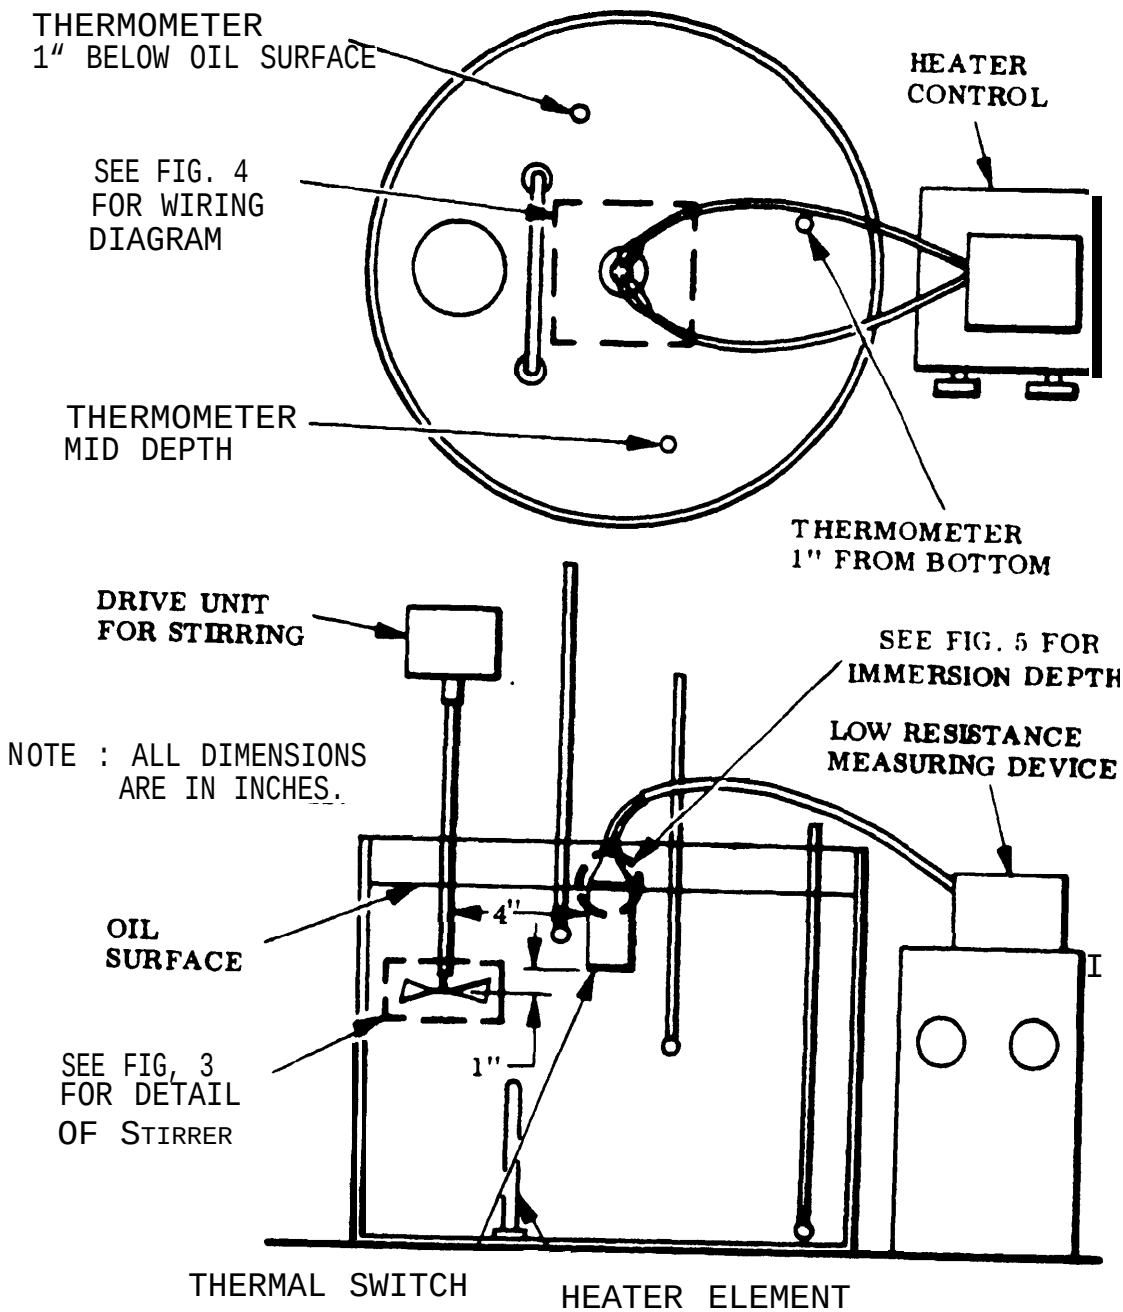


Figure 2. Temperature Functioning Test Equipment Arrangement

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

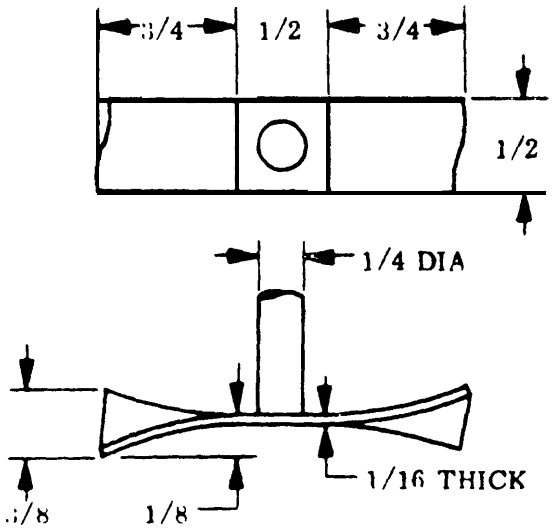

NOTE:
THE l/4DIA ROD SHALL BE OF SUFFICIENT LENGTH TO MOUNT TO DRIVE UNIT AND SUSPEND BLADE 1 INCH BELOW BASE OF THERMAL SWITCH .
ALL DIMENSIONS ARE IN INCHES.

Figure 3. Detail of Oil Stirrer

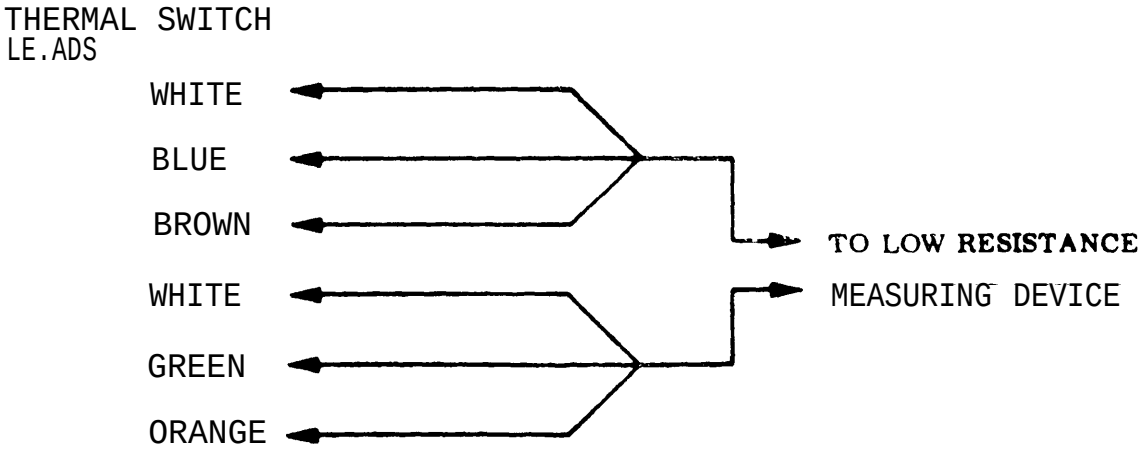


Figure 4. Wiring Diagram, Thermal Switch Leads to LOW Resistance Measuring Device

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T07:13Z
Check the source to verify that this is the current version before use.

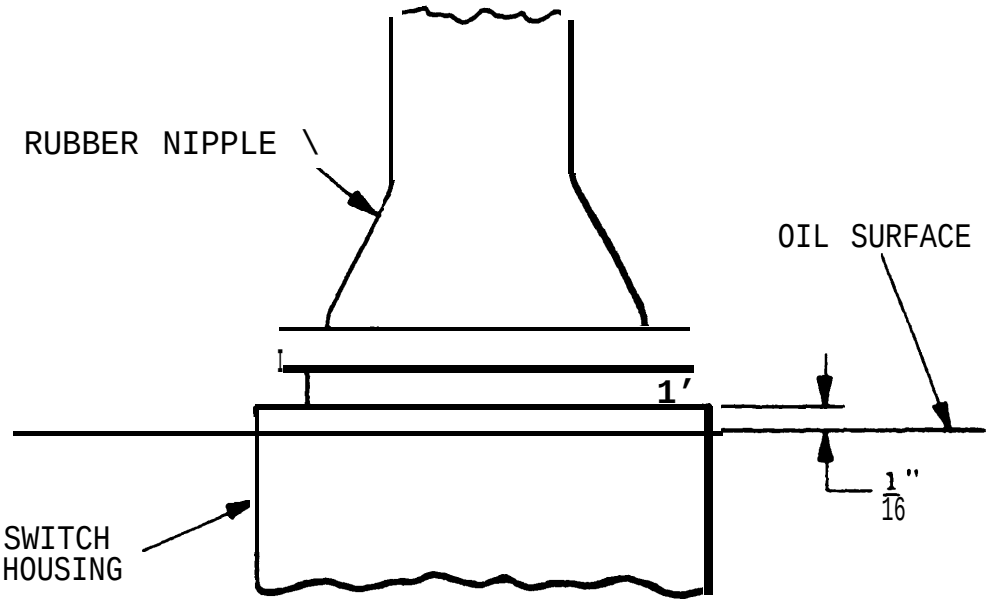


Figure 5. Depth of Immersion

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.5. 1.1 Temperature, storage condition, The switch shall be subjected to a temperature of minus 65 plus 5 minus 0 degrees F for not less than 48 hours. The temperature shall be raised to plus 160 plus 0 minus 5 degrees F in not less than 2 hours and maintained at this temperature for not less than 48 hours. The unit shall then be subjected to room temperature for not less than 2 hours prior to performing subsequent tests.

4.3.1.2 Acceleration. The switch, mounted as shown in Figure 6, shall be subjected to acceleration of 25 plus 2.5 minus 0g in the direction shown in Figure 1 for not less than 4 seconds. Monitor the switch circuits during acceleration; the switch circuits shall remain closed during acceleration and thereafter sha11 pass the quality conformance inspection tests.

4.5, 1.3 Vibration, standby condition. The switch, rigidly mounted as shown in Figure 6, shall be subjected to the vibration tests for Type I equipment as specified in MIL-STD - 167 up to 25 cps in each of the three axes shown in Figure 1.

4,5. 1.4 Vibration, operating condition, The switch, rigidly mounted as shown in Figure 6, shall be subjected to vibration from 20 to 2000 cps at 0. 10-inch doulble amplitude or 10g, whichever is less, along each of three mutually perpendicular axes. The frequency shall be increased uniformly from 20 to 2000 cps. The frequency shall be traversed in not less than 2.5 minutes, once in each axis. Monitor the switch circuits during vibration. The switch circuits shall remain closed during vibration and thereafter shall oass the quality conformance inspection tests.

NOTE: Instrumentation used for the shock test shall not employ a filter with 3 cut-off frequency below 10 kc.

4,5.1.5 Shock standby condition. Subject the switch to shocks of 40 plus or minus 4g peak magnitude with a pulse shape approximating a one-half sine wave having a duration of 5 plus 3 minus 0 milliseconds. Shocks shall be applied three times in each direction along each of three mutually perpendicular axes as shown in Figure 1. Mount the switch in a manner similar to that shown in Figure 6.

4.5, 1.6 Shock, operating condition. The switch shall be mounted as shown in Figure 6, and subjected to the following tests.

4.5. 1.6.1 Major. Subject the switch to a shock of 2400 plus or minus 240g peak magnitude. The shock shall have a pulse shape approximating a one-half sine wave having a duration of 1 plus or minus 0.25 millisecond. Apply the shock in the direction shown in Figure 1. Thereafter the switch shall pass the quality conformance inspection tests except for the functioning tests of 4,6.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

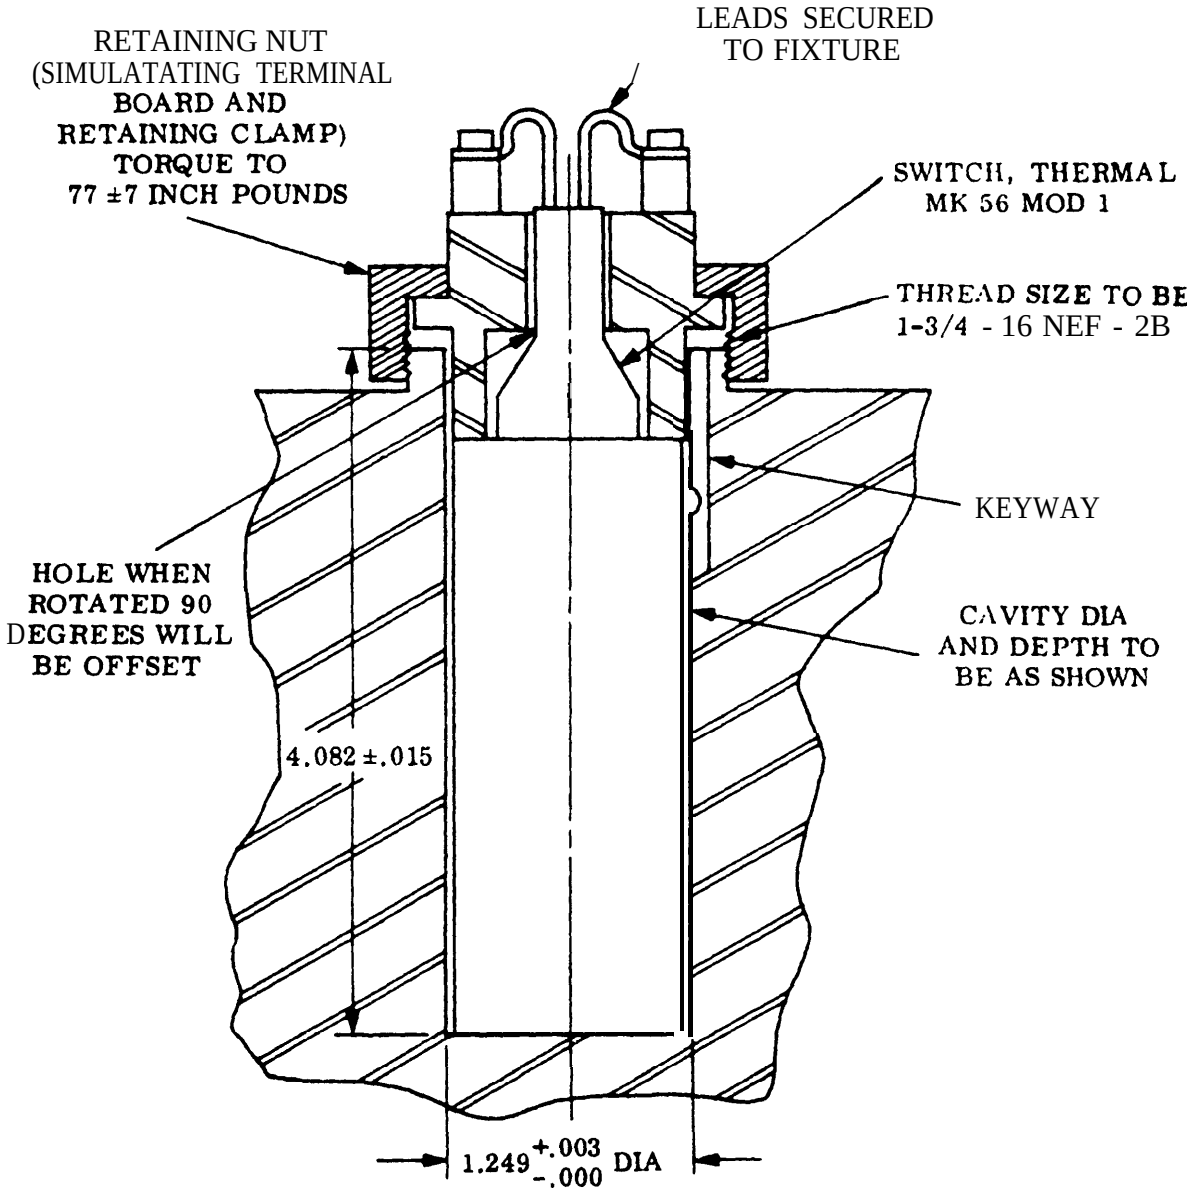


Figure 6. Suggested Acceleration, Vibration and **Shock** Test Fixture

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.5,1.6.2 Minor. Subject the switch to two shocks of 1200 plus or minus 120g peak magnitude. The shocks shall have a pulse shape approximating a one-half sine wave having a duration of 1 plus or minus 0.25 millisecond. Apply the shocks in two directions 90 degrees apart and perpendicular to the major shock axis. Thereafter the switch shall pass the quality conformance inspection tests except for the functioning tests of 4.6.2.3.

4,5. 1.7 Current capacity. Connect a voltmeter across the following leads. Apply direct current as specified for not less than 90 seconds. The voltage drop shall not exceed the specified value.

circuit	Current	Voltage Drop
Brown to Orange	15 plus o minus 2 amperes	1.5 volts
Blue to Green	15 plus o minus 2 amperes	1.5 volts
White to White	1 plus 0.0 minus O. 1 ampere	0.1 volt

4, G Quality conformance inspection. Samples selected using the plans and procedures set forth in Table II of this specification shall be subjected to the tests and exam inations as described in 4.6.2.

Table II. Quality Conformance Test and Exam inations and AQL

Test	Sampling Plan	AQL	Test Paragraph
Circuit resistance			
White lead to White lead	l	2.5	4.6.2.2
Brown lead to Orange lead	*	1,0	
Blue lead to Green lead	*	1.0	
Insulation resistance	l	l.O	4.6.2.1
Temperature, nonfunction	**	l *	4.6.2.3.1

l MIL-STD- 105D Inspection Level II

l *MIL-STD- 105D Special Inspection Level S-3; zero defects accepted

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T07:13Z
Check the source to verify that this is the current version before use.

Table II. Quality **Conformance Tests and Exam inations and AQL (Continued)**

Test	Sampling Plan	AQL	Test Paragraph
Temperature, function	**	**	4.6,2.3.2
Attitude, after function	**	***	4.6.2.3.3
Visual examination	***	***	**4.6.2.4**
Preservation, packaging, packing and marking	****	****	**4.7**

● ***MI L-STD - 105 D Special Inspection Level S-3; zero defects accepted**

****one-hunred percent inspection; defect is cause for rejection of individual unit.**

4,6.1 Test conditions. Unless otherwise specified, the **switch shall bc subjected to the quality conform ante inspection under the following conditions:**

a. Temperature — **Room ambient (65 to 95 degrees F)**

b. Altitude — **Normal ground atmospheric pressure**

c. Humidity (Relative) — **Room ambient up to 95 percent**

4.6.2 Test procedure. The switch shall be subjected to the tests and **examinations as outlined herein. Unless otherwise specified, inability of the switch to pass the tests and examinations shall constitute a failure.**

4.6.2,1 Insulation resistance. Place the switch in a conditioning chamber and maintain the temperature at 75 **plus or minus 5 degrees F and the relative humidity at 75 plus** or **minus 5 percent for a period of not less than 24 hours. Remove the switch from the chamber and within 10 minutes measure the insulation resistance between the mutually insulated points listed below. The applied potential shall be 500 plus or minus 50 volts DC. The insulation resistance shall not be less than 100 megohms. When this test is performed during or subsequent to the environmental tests specified in 4.5.1, there shall be no temperature or humidity conditioning *other* than that required by the individual environmental test; the insulation resistance shall then be 20 megohms minimum. The mutually insulated points are**

a. Case

b. Each of the independent normally closed circuits

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

4.6.2,2 Electrical continuity and circuit resistance test. Using the low resistance measuring device specified in 4.4. la, measure the resistance of the three switch circuits. The resistance shall be less than O. 10 ohm.

4,6.2,3 Functioning test.

4,6.2 .3.1 Temperature, nonfuction. Subject the switch to a temperature of 165 plus O minus 5 degrees F for a duration of not less than 24 hours. Thereafter, the resistance of the three circuits shall be measured. The resistance shall be less than O. 10 ohm.

4.6,2.3.2 **Temperature, functioning.** Subject the switch to a temperature of 80 plus or minus 15 degrees F for a minimum period of 2 hours just prior to performing this test. Connect the low resistance measuring device specified in 4.4. la to the switch leads as indicated in Figure 4. Immerse the switch into the constant temperature oil bath assembly specified in 4.4. le through 4.4, lj. The oil in the bath shall be maintained at a temperature of 240 plus 5 minus O degrees F. The switch shall be suspended in such a manner that the oil surface is as shown in Figure 5. Measure the time interval between switch immersion and opening of all three normally closed circuits, as indicated by the low resistance measuring device, using the calibrated timer specified in 4.4, lj. The lime interval shall be less than 12 minutes.

4, 6.2. 3.3 Attitude, after functioning. Switches that have satisfactorily passed the temperature functioning test of 4,6.2.3,2, shall be inclined at an angle of 45 plus or minus 5 degrees (lead end down). Using the high temperature chamber specified in 4.4. lk, subject the switches to a temperature of 400 plus or minds 20 degrees F for 30 plus or minus 5 minutes, at which time the switch circuits shall be tested for continuity, All circuits shall be open.

4. 6. 2,4 Visual examination. Visual examination shall be made on each switch submitted for delivery to the procuring agency. The switch shall be examined for conformance to the requirements of good workmanship in 3,5. Nonconformance shall be cause for rejection of the individual unit.

4.7 Preservation, packaging packing, and marking. The switch shall be examined for conformance to the prescribed preservation, packaging, packing, and marking requirements of Section 5,

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be Level A or C as specified. (See 6.2b and 6.4.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

5. 1.1 Level A

5. 1.1.1 Cleaning. The switch shall be cleaned in accordance with Method c-l, MIL-P-116.

5. 1.1.2 Drying. The switch shall be dried in accordance with Method D-4, MIL-P-116.

5. 1.1.3 Unit packing. The switch shall be individually packaged in accordance with Method 1A-8, MIL-P-116.

5. 1.2 Level C. Cleaning, drying, preservation, and packaging shall be in accordance with the supplier's commercial practice, when such practices have been approved by the procuring activity.

5.2 Packing. Packing shall be Level A or C as specified. (See 6. 2C and 6.4.)

5.2.1 Level A. Unless otherwise specified in the contract, order, or req - uisition, the switches shall be packed in exterior-type shipping containers, PPP-B-621, of uniform size and shape, with the minimum cube and tare consistent with the protection required. The gross weight of eight pack shall be limited to approximately 100 pounds. Containers shall be provided with a case liner, MIL-L-10547, and shall be closed and strapped in accordance with PPP-B-621.

5.2.2 Level C. The switch packaged as specified in 5.1.2, shall be packed to afford protection against damage during shipment from the supply source to the first receiving activity for immediate use. Containers shall comply with common carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use and description.

6. 1.1 Intended use. The switch is intended to be used in a fuze to protect the fuze against high temperature.

6. 1.2 Description. The switch is a safety device designed to open three electrical circuits when ambient temperature reaches a predetermined level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

a. Title. number, and date of this specification.

b, Required level of prservation and packaging,

c. Required level of packing.

cl. Any exceptions to this specification.

6.2. I Additional samples. Additional samples required because of failure of any sample(s) to pass the prescribed inspections shall be provided and inspected at the expense of the supplier.

6.3 Definitions. For the purpose of this specification the following definitions have been established.

6.3.1 Unit condition.

6.3.1.1 Operating. Operating is the condition of the switch during missile

6.3. 1.2 Standby. standby is the condition of the switch when aboard ship and is asscmbled with the end item .

6.4 Preparationg for delivery criteria. Criteria for use of the proper level of preservation, packaging, and packing shall be as specified in FED-STD-102.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

ECIFICATION
IL-S-82529(OS) SWITCH, THERMAL MARK 56 MOD 1

SANIZATION *(Of submitter)* | CITY AND STATE

NTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

TERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

JBMITTED BY *(Printed or typed name and activity)* | DATE

) FORM 1426
1 APR 63

C-8878

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Ordnance Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL ORDNANCE SYSTEMS COMMAND (ORD 9343)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

303-228 (Z1292)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:13Z
Check the source to verify that this is the current version before use.