MILITARY SPECIFICATION

FUZE, BOMB, XM912

1. SCOPE

1.1 This specification covers a fuze for use with self dispersing chemical bomblets.

2. APPLICABLE DOCUMENTS

2.1 Government documents. The following documents of the issue in effect on date of invitation for bids form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-590	-	Plastic Compounds, Molding and Extrusion, Polyethylene.
O-A-51	-	Acetone, Technical.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Box, Fiberboard.
PPP-F-320	-	Fiberboard; Sheet, Stock and Cut Shapes.
PPP-T-60	-	Tape; Pressure Sensitive Adhesive, Waterproof-For Packaging and Sealing.

MILITARY

MIL-G-155	-	Graphite, Dry (For Use in Ammunition).
JAN-C-263	-	Calcium Stearate.
JAN-B-366	-	Barium Stearate.
MIL-M-542	-	Magnesium Stearate (For Use in Ammunition).
MIL-C-3955	-	Cans, Fiber, Spirally Wound.

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-350 - Jolt Test for Use in Production of Fuzes.
MIL-STD-351 - Jumble Test for Use in Production of Fuzes.

DRAWINGS

EDGEWOOD ARSENAL

DL14-15-894 - Fuze, Bomb, XM912.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

CODE OF FEDERAL REGULATIONS

49 CFR 71-90 - Interstate Commerce Commission Rules and Regulations for the Transportation of Explosives and Other Dangerous Articles.

(The Interstate Commerce Commission regulations are a part of the Code of Federal Regulations available from the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Orders for the above publication should cite "49 CFR 71-90.")

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies of these freight classification rules should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago 6, Illinois.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials and components.

3.1.1 Materials. All materials cited on Drawing DL14-15-894 or on the subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

3.1.2 Components. All components shall conform to the specifications and drawings listed on Drawing DL14-15-894 and subsidiary drawings.

3.2 Assembly. The fuze shall be assembled as specified on Drawing D14-15-894.

3.3 Safety. The fuze (Dwg D14-15-894) shall not arm when it is spun about its axis at a velocity of 1150 ± 50 revolutions per minute (rpm) when tested as specified in 4.6.1.

3.4 Jolt and jumble. The fuze, with inertia ring attached, shall withstand the jolt and jumble tests, without arming, when tested as specified in 4.6.2.

3.5 Leakage. A continuous stream of air bubbles shall not emerge from the fuze when immersed in water to a depth of not less than three inches. The chamber shall be subjected to a vacuum pressure differential of five pounds per square inch (psi) minimum for no less than fifteen seconds. The water shall contain a wetting agent in sufficient concentration to prevent air bubbles from clinging to the surface when tested as specified in 4.6.3.

3.6 Functioning. The fuze shall function at a spin velocity of 1800 ± 200 rpm when tested as specified in 4.6.4..

3.7 Composition. The charge in the lead cup (Dwg B14-15-861) shall be consolidated from tetryl conforming to the grade and class specified. The total weight of binders, lubricants and inert materials shall not exceed one-half of one percent of the charge weight when tested as specified in 4.6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

3.8 Binder. The following materials, or any combination thereof, may be used as binders and lubricants to facilitate manufacture of the pellet, provided they are uniformly blended with the tetryl:

(a) Graphite conforming to Specification MIL-G-155.
(b) Barium stearate conforming to Specification JAN-B-366.
(c) Calcium stearate conforming to Specification JAN-C-263.
(d) Magnesium stearate conforming to Specification MIL-M-542.

3.9 Workmanship. The fuze shall be free from contamination (foreign matter, oil or grease) and damage such as dents, cracks or deformation which would affect its use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratories acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Government's responsibility. Tests prescribed by 4.6 will be observed by the Government.

4.2 Special provisions.

4.2.1 Alternative inspection. The supplier may utilize any alternative inspection procedure which will provide equal or better quality assurance by submitting a written proposal with justification and obtaining written approval from the Government prior to instituting the procedure. In case of dispute, the procedures of this specification will govern.

4.2.2 Objective evidence. The supplier shall provide objective evidence acceptable to the contracting officer that the requirements of 3.1 and section 5 for which specific inspection has not been provided in this specification have been satisfied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

4.2.3 Inspection substations. If the supplier elects to establish inspection substations for the purpose of conducting inspection for certain listed defects, the acceptable quality levels (AQL's) for each inspection substation shall be equal to the AQL which is the next numerically lower value than the AQL specified for the total listed defects. The requirements of Standard MIL-STD-105 are applicable to each substation and to the end item.

4.3 Lotting. A lot shall consist of the fuzes loaded by one manufacturer, at one plant, from the same materials, under essentially the same manufacturing conditions. However, no more than one lot of detonators or one lot of lead cup assemblies shall be represented in any one lot of finished fuzes.

4.4 Sampling.

4.4.1 For examination. Sampling shall be conducted in accordance with Standard MIL-STD-105.

4.4.2 For nondestructive test. Sampling for leakage shall be conducted in accordance with Standard MIL-STD-105, level S-4.

4.4.3 For destructive tests.

4.4.3.1 Functioning. The accepted sample fuzes after leak test shall be used for the functioning test.

4.4.3.2 Jolt and jumble. Sampling for each test shall be conducted in accordance with Standard MIL-STD-105, level S-3.

4.4.3.3 Composition. Sampling for composition of the charge in the lead cup shall be conducted in accordance with Standard MIL-STD-105, level S-2.

4.5 Inspection provisions.

4.5.1 Examination. Sample fuzes and the level A and B preparation for delivery thereof shall be examined in accordance with the classification of defects and Standard MIL-STD-105.

4.5.2 Nondestructive test. Sample fuzes shall be tested for leakage in accordance with 4.6.3 and Standard MIL-STD-105, using an AQL of 1.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 202640-22T07:26Z
Check the source to verify that this is the currentversion before use.

4.5.3 Destructive tests.

4.5.3.1 Functioning. After testing as specified in 4.6.3, the sample fuzes shall be tested in accordance with 4.6.4 and Standard MIL-STD-105, using an AQL of 1.0 percent defective.

4.5.3.2 Jolt and jumble. Sample fuzes shall be tested in accordance with 4.6.2 and Standard MIL-STD-105, using an AQL of 1.0 percent defective for each test.

4.5.3.3 Composition. The sample composition taken from the interior of the lead cup assembly shall be tested in accordance with 4.6.5 and Standard MIL-STD-105, using an AQL of 1.5 percent defective.

4.5.3.4 For critical characteristics. Each fuze in the lot shall be inspected for the critical characteristics listed in the classification of defects.

4.5.4 Classification of defects.

4.5.4.1 Fuze, bomb, XM912, assembly. (Dwg D14-15-894)

Categories	Defects	Acceptance standards
Critical:		
1	Fuze armed	4.6.1
Major:	AQL 0.65 percent defective	
101	Lead cup assembly missing	
Major:	AQL 1.0 percent defective	
102	Outside (large dia) incorrect	
103	Outside (small dia) incorrect	
104	Length to shoulder incorrect	
105	Seal missing or loose	
106	Damage and/or foreign matter	
107	Inertia ring missing or incorrectly assembled	
Minor:	AQL 2.5 percent defective	
201	Marking missing, illegible or incorrect	

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.

4.5.4.2 Preparation for delivery. (Section 5)

Categories	Defects
Critical:	None defined
Major:	AQL 2.5 percent defective
101	Quantity of fuzes and spacer collars per tube container incorrect
102	Loose pack
103	Spacer collars incorrect
104	Container closures incorrect
105	Strapping loose or missing
106	Marking missing, illegible or incorrect.

4.6 Tests.


4.6.1 Safety. The fuze assembly, less the lead cup, with the lead cup end up, shall be mounted in a centrifuge and rotated at the nonarming speed specified. The axis of the spindle shall be vertical and the spindle shall produce a horizontal circular vibration about the axis of 0.040 inch minimum total amplitude at a frequency of 75 to 80 cycles per second (cps) and a vertical vibration along the axis of 0.040 inch minimum total amplitude at a frequency of 80.5 to 86.5 cps. If the firing pin can be observed, the fuze shall be considered unarmed.


4.6.2 Jolt and jumble. The fuze assemblies, less the lead cup assembly, shall be tested in accordance with Standard MIL-STD-350 for jolt and Standard MIL-STD-351 for jumble. If the firing pin cannot be observed, the fuze shall be considered armed.

4.6.3 Leakage. The fuze shall be immersed in water, to the depth specified and with the wetting agent in the concentration specified. The fuze shall be checked for leaks. Fuzes passing this test shall be thoroughly rinsed in running water to remove the wetting agent.

4.6.4 Functioning. The fuze assembly shall be assembled into an inert sphere (see figure 1). The assembly shall be spun in an air jet at a height of 5.5 ± 1.5 inches above the jet orifice. After the specified revolutions are obtained, the jet shall be tilted and the assembly dropped 9 feet onto a 3/4-inch-thick plywood sheet backed up by a 1/2-inch-thick plywood sheet fastened to a concrete block. The 3/4-inch-thick plywood sheet shall be replaced after a maximum of 250 assemblies have been dropped on it.

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.

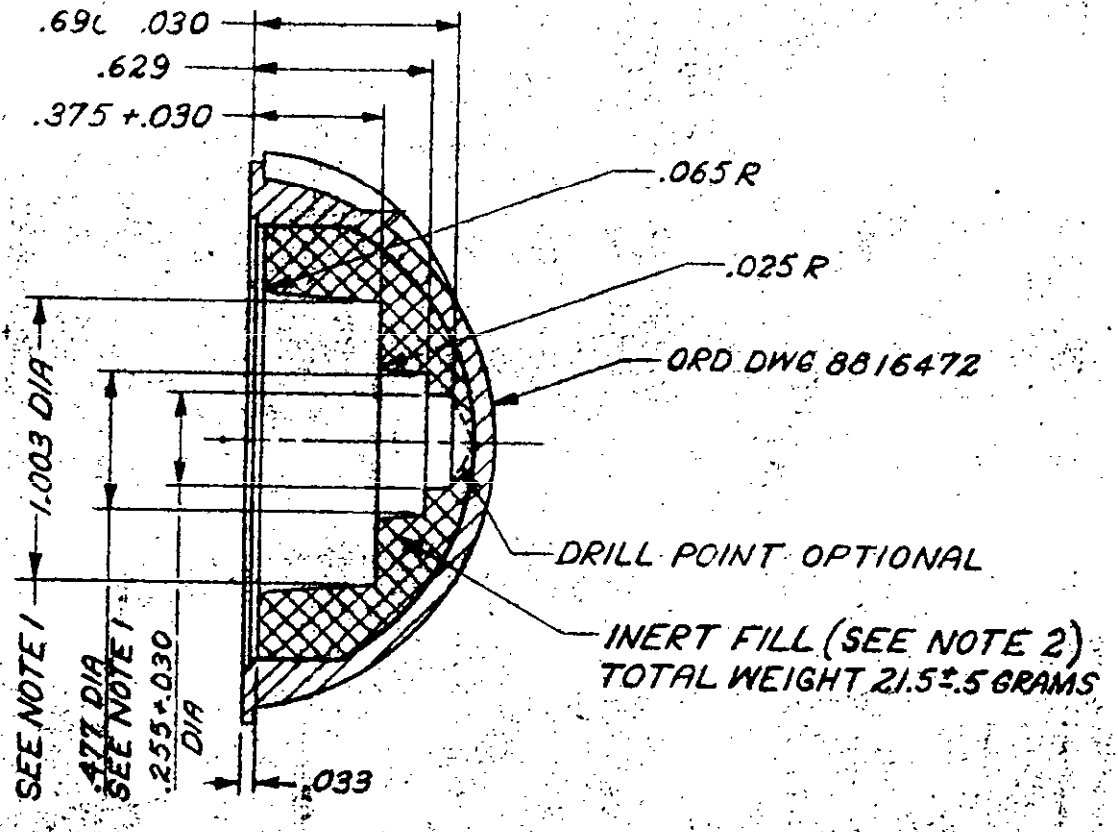

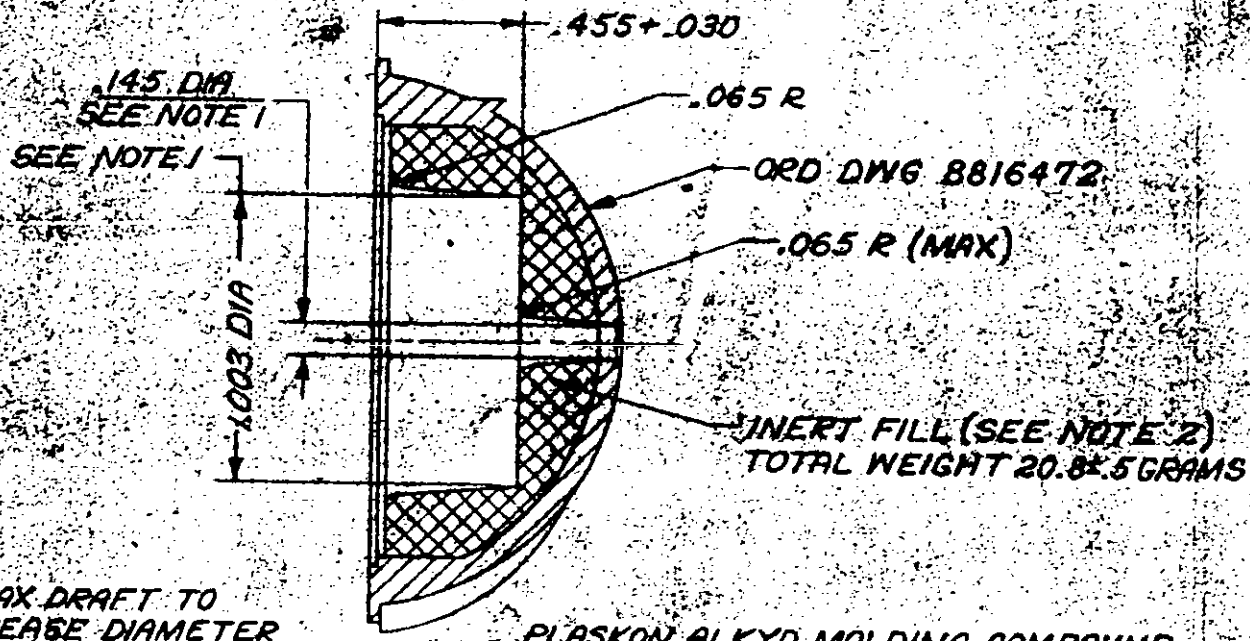

NOTES:
1. 2° MAX DRAFT TO INCREASE DIAMETER
2. BY WEIGHT: 49% BORAX; 1% STEARATE; 50% PLASKON

PLASKON ALKYD MOLDING COMPOUND 422 - PRODUCT OF BARRETT DIV ALLIED CHEMICAL AND DYE CORP OR APPROVED SUBSTANTIAL EQUAL

FIGURE 1. TEST HOLDER

DIMENSIONS ARE IN INCHES

PART OF SPEC	CHEMICAL CORPS SPECIFICATION FIGURE
196-131-751 196-131-752	DATE 19 OCT 60 — A18-60-862

Source: https://assist.dla.mil -- Downloaded: 20260-22107:262
Check the source to verify that this is the current version before use.

4.6.5 Composition. A composite sample of approximately 10 grams of tetryl taken from the interior of the lead cups, shall be weighed to the nearest 0.5 milligram in a tared extraction thimble. A Soxhlet extraction apparatus, containing approximately 50 milliliters of acetone conforming to Specification O-A-51, shall be used. Heat shall be applied to the apparatus until a constant rate of reflux is reached, the rate being at least 60 drops per minute. The maximum reflux rate shall be such that the liquid level remains at least 16 millimeters below the top of the thimble. The amount of solvent in the apparatus shall always be sufficient to keep the tetryl in solution. The extraction shall continue for 1 hour after the solvent in the extraction tube becomes colorless. Upon completion of the extraction, the thimble shall be placed in a well-ventilated drying chamber and dried to constant weight at 50° ± 2°C. The residue shall be calculated as percent binders, lubricants, and inert materials.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Level A.

5.1.1.1 Unit packaging. Twenty fuzes, each with a spacer collar placed on the smaller diameter end of the fuze, shall be packaged together in a fiber tube container fabricated in conformance with the requirements for type II, grade B, style a, class 2, spirally wound fiber cans of Specification MIL-C-3955. The inside dimensions of the fiber tube container shall be 1-1/2 inches in diameter by approximately 25-3/4 inches long. The spacer collars shall be fabricated from polyethylene conforming to Specification L-P-590, type and grade optional. The size of each spacer collar shall be 1-7/16 inch outside diameter by 7/16 inch in length with a 3/8 inch wall thickness. Prior to placing fuzes in tube container, a fiberboard disk shall be put in the bottom of the container. After all fuzes with spacer collars have been placed therein, another fiberboard disk shall be placed on top, using additional disks as required to make a tight package. The disks shall be fabricated from type CF or SF fiberboard conforming to Specification PPP-F-320. The fiber tube container shall then be closed and the closure seam sealed with minimum 1-inch wide type I, class 2 or 3 pressure-sensitive tape conforming to Specification PPP-T-60.

Source: https://assist.dla.mil -- Downloaded: 202640-22T07:26Z
Check the source to verify that this is the current version before use.

5.1.1.2 Intermediate packaging. Ten unit packages of fuzes shall be intermediately packaged in two layers of five per layer in a WSc, style FOL, fiberboard box, conforming to Specification PPP-B-636. The box shall be closed in conformance with the appendix requirements for interior boxes of Specification PPP-B-636, additionally taping all seams, including the manufacturer's joint, as specified therein.

5.1.2 Level C. Fuzes shall be packaged in accordance with the manufacturer's commercial practice in such manner as to prevent damaging the fuze.

5.2 Packing.

5.2.1 Level B. Fuzes packaged as specified in 5.1 shall be packed not to exceed 150 pounds gross weight per container in domestic type boxes conforming to either Specification PPP-B-621 or PPP-C-601, with closure and strapping to be in accordance with the applicable requirements of the applicable container specification and its appendix thereto, using galvanized strapping.

5.2.2 Level C. Fuzes packaged as specified in 5.1 shall be packed in such manner as to provide protection against damage during direct shipment from the supply source to first receiving activity for immediate use. Containers used shall comply with the ICC regulations, Uniform Freight Classification Rules or other carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, unit packages, intermediate packages and shipping containers shall be marked in accordance with ICC regulations and Standard MIL-STD-129, except that color code identification shall be as shown on figure 2.


6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Level of packaging and packing required.

6.2 Caution. Adequate precaution should be taken to prevent explosions while assembling in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

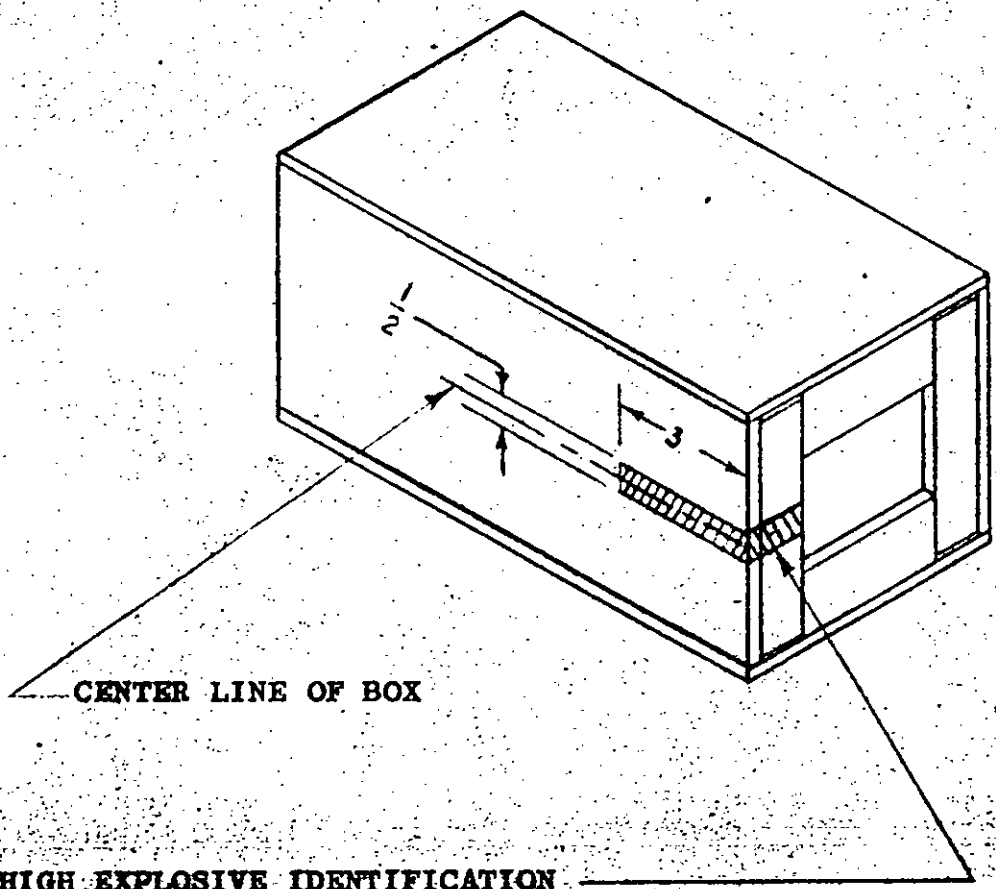

HIGH EXPLOSIVE IDENTIFICATION
MARK CORNER OF BOX AS SHOWN, A
COLOR YELLOW NO. 23538 or 33538 STRIPE.

Fig. 2

PART OF SPEC	CHEMICAL CORPS SPECIFICATION FIGURE
MIL-B-23388 MIL-S-10432A	DATE: 5 JUN 63 | A18-60-963

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T07:26Z
Check the source to verify that this is the current version before use.

6.3 Safety classification. This item carries the following Ordnance safety classification: Storage Compatibility group B, explosive hazard class 3.

6.4 Supersession data. This specification supersedes Chemical Corps Purchase Description 196-131-752, dated 25 April 1962.

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1325-A101

Source: https://assist.dla.mil -- Downloaded: 202610-22T07:26Z
Check the source to verify that this is the current version before use.