
MIL-B-3628 / 46C
10 February 1988
SUPERSEDING
MIL-B-3628 / 46B
31 October 1969

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, INTER-DIVISION PISTOL TEAM, MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

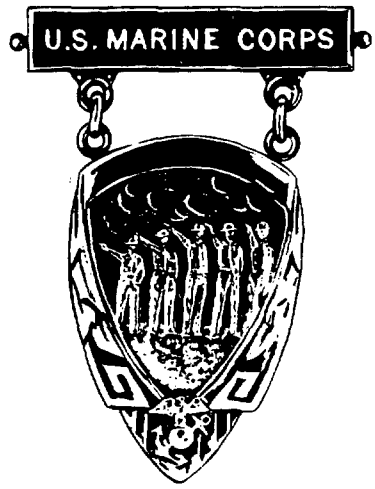

MATERIAL: 1/10 10 KARAT GOLD FILLED (1/20 OBVERSE, 1/20 REVERSE OVER COMM'L BRASS ALLOY)

DIMENSIONS (INCHES):
- HEIGHT:
  - ASSEMBLED: 2 (REF)
  - PENDANT (EXCLUDING LUGS): 1-1/2 (REF)
  - SUSPENSION BAR (EXCLUDING LUGS): 9/32 (REF)
- WIDTH (OVERALL):
  - PENDANT: 1 (REF)
  - SUSPENSION BAR (INCLUDING BALLS): 1-17/32 (REF)
- THICKNESS:
  - PENDANT (THICKEST POINT): .110 (REF)
  - SUSPENSION BAR (AT RIM): .065 (REF)

FINISH:
- OBVERSE:
  - PENDANT: GOLD PLATED, SMUDGED, RELIEVED WITH POLISHED HIGHLIGHTS
  - SUSPENSION BAR: GOLD PLATED, SMUDGED WITH POLISHED HIGHLIGHTS
- REVERSE: MIRROR-LIKE POLISHED

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:06Z
Check the source to verify that this is the current version before use.

NOTES:

1. THE LUGS ARE AN INTEGRAL PART OF BOTH THE PENDANT AND THE SUSPENSION BAR.
2. THE CONNECTING LINKS, FORMED FROM .042 ± .002 INCH DIAMETER WIRE, SHALL BE OBLONG SHAPED, 3/16 ± 1/64 INCH LONG BY 1/8 ± 1/64 INCH WIDE.
3. THE ATTACHING DEVICE SHALL BE A PRONG AND FLAT BALL TYPE CLUTCH. THE DEVICE SHALL BE CENTERED ON AND SOLDERED TO THE BACK OF THE SUSPENSION BAR. THE PRONGS SHALL BE LOCATED 1-1/8 ± 1/32 INCHES ON CENTERS EQUIDISTANT FROM EACH END.

Custodian:
Army - IH
Navy - NU

Review activities:
Navy - MC
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

☆U.S. GOVERNMENT PRINTING OFFICE: 1988 — 505-033/92253

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:06Z
Check the source to verify that this is the current version before use.