
MIL-B-3628 / 48D
5 MAY 1986
SUPERSEDING
MIL-B-3628 / 48C
22 APRIL 1986

MILITARY SPECIFICATION SHEET

BADGES, QUALIFICATION, PISTOL TEAM MATCHES, MARINE CORPS

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

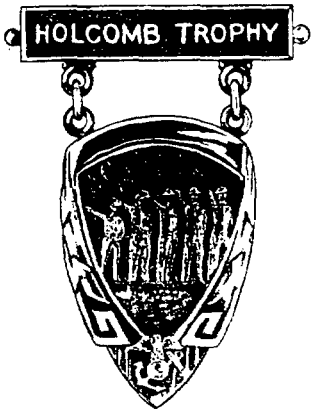

DASH NO.	TITLE
-1:	HOLCOMB PISTOL TEAM MATCH
-2:	EDSON PISTOL TEAM MATCH
-3:	SHIVELY PISTOL TEAM MATCH
-4:	FINN PISTOL TEAM MATCH

MATERIAL: 1/10 10 KARAT GOLD FILLED (1/20 FRONT AND 1/20 BACK OVER A COPPER BASE ALLOY)

DIMENSIONS (INCHES):
- HEIGHT:
  - ASSEMBLED: 2 (REF)
  - PENDANT (EXCLUDING LUGS): 1-1/2 (REF)
  - SUSPENSION BAR (EXCLUDING LUGS): 9/32 (REF)
- WIDTH (OVERALL):
  - PENDANT: 1 (REF)
  - SUSPENSION BAR (INCLUDING BALLS): 1-17/32 (REF)
- THICKNESS:
  - PENDANT (THICKEST POINT): .110 (REF)
  - SUSPENSION BAR (AT RIM): .065 (REF)

FINISH:
- PENDANT: GOLD ELECTROPLATED SMUDGED, RELIEVED WITH POLISHED HIGHLIGHTS
- SUSPENSION BAR: GOLD ELECTROPLATED; OBVERSE SMUDGED WITH POLISHED HIGHLIGHTS; REVERSE MIRROR-LIKE POLISHED

NOTES:
1. THE LUGS ARE AN INTEGRAL PART OF BOTH THE PENDANT AND SUSPENSION BAR.
2. THE CONNECTING LINKS, FORMED FROM .042 ± .002 INCH DIAMETER WIRE, SHALL BE OBLONG SHAPED, 3/16 ± 1/64 INCH LONG BY 1/8 ± 1/64 INCH WIDE.
3. THE ATTACHING DEVICE SHALL BE A PIN AND CATCH TYPE AND SHALL BE CENTERED ON AND SOLDERED TO THE BACK OF THE SUSPENSION BAR. THE HINGE AND CATCH SHALL BE LOCATED 1-1/8 ± 1/32 INCHES ON CENTERS AND THE PIN SHALL BE 1-7/32 ± 1/32 INCHES LONG.
4. DASH NO. 1 THRU DASH NO. 4 HAVE THE SAME DESIGN. ONLY THE NAME ON THE SUSPENSION BAR DIFFERS. DASH NO. 1 IS SHOWN AS ILLUSTRATIVE.

Custodians:
Army - IH
Navy - NU
Review activities:
Navy - MC
Other - CT

Preparing activity:
Army - IH

(Project No. 8455 - N222)

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:07Z
Check the source to verify that this is the current version before use.