
MIL-B-3628 / 51C
10 February 1988
SUPERSEDING
MIL-B-3628 / 51B
10 July 1970

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, PATHFINDER, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.



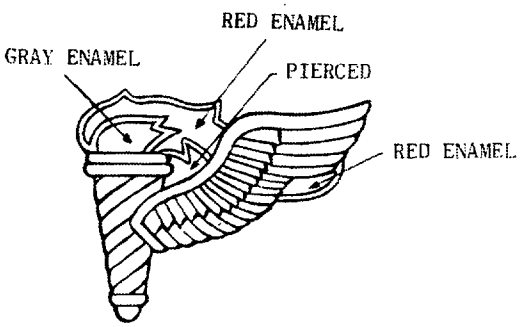

DASH NOS.
-1: REGULAR SIZE
-2: REGULAR SIZE, SUBDUED
-3: DRESS MINIATURE

MATERIAL:
-1,-3: GILDING METAL
-2: RED BRASS OR GILDING METAL

DIMENSIONS (INCHES):
HEIGHT (OVERALL):
-1,-2: 1-3/16 (REF)
-3: 11/16 (REF)

WIDTH (OVERALL):
-1,-2: 1-3/16 (REF)
-3: 7/8 (REF)

THICKNESS (AT THICKEST POINT OF TORCH):
-1,-2: .100 ± .010
-3: .075 ± .010

FINISH:
-1,-3: ENAMELED, GOLD PLATED, MIRROR-LIKE POLISHED FINISH
-2: DULL, FLAT BLACK ENAMEL FINISH

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. ENAMELED AREAS SHALL BE AS INDICATED. THE ENAMEL COLOR SHALL MATCH THE ENAMEL OF THE STANDARD SAMPLE AND THE COLOR CHIPS LISTED BELOW.

COLOR	CHIP NO.
RED	1
GRAY	27

2. ATTACHING DEVICE SHALL BE TWO PRONGS AND CLUTCHES. THE PRONGS SHALL BE SOLDERED OR FUSED TO THE BACK OF THE BADGE AND THE HORIZONTAL CENTERLINE OF THE BADGE WITH ONE PRONG LOCATED ON THE VERTICAL CENTER LINE OF THE TORCH. THE PRONGS FOR DASH NOS. 1 AND 2 SHALL BE 1 ± 1/32 INCH ON CENTERS AND THE PRONGS FOR DASH NO. 3 SHALL BE 9/16 ± 1/32 INCH ON CENTERS.

3. THE ENAMEL SHALL BE VITREOUS ENAMEL AND SHALL BE FLUSHED IN SO AS TO BE LEVEL WITH THE DIKES. THE ENAMEL SHALL BE SMOOTH BUT NEED NOT BE STONED.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.