NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/51G
15 November 1996
SUPERSEDING
MIL-B-3628/51F
30 July 1993

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, PATHFINDER, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

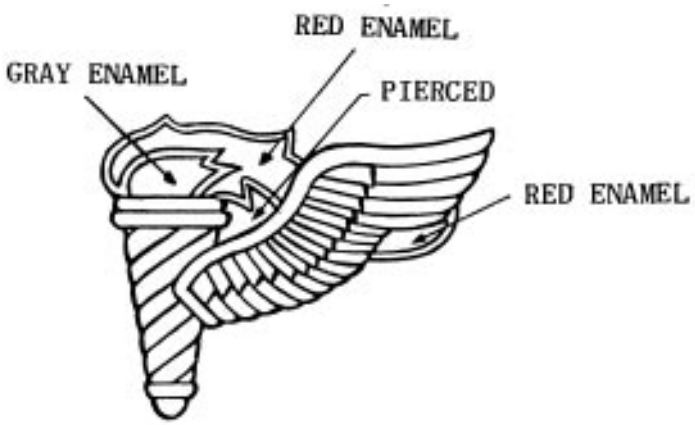

MATERIAL:
-1, -3: Gilding Metal
-2: Red Brass Or Gilding Metal

DASH NO.
-1: Regular Size
-2: Regular Size, Subdued
-3: Dress Miniature Size

DIMENSIONS:
HEIGHT (Overall):
-1, -2: 1-3/16 inches (3.02 cm) (REF)
-3: 11/16 inch (1.75 cm) (REF)
WIDTH (Overall):
-1, -2: 1-1/2 inches (3.81 cm) (REF)
-3: 7/8 inch (2.22 cm) (REF)
THICKNESS (At Thickest Point Of Torch):
-1, -2: 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)
-3: 0.075 inch ± 0.010 inch (0.190 cm ± 0.025 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.

FINISH:
-1, -3: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Dull, Flat Black Enamel

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Red	1
Gray	27

3. Hard (Vitreous) enamel shall be smooth and flush with the dikes; however, the enamel need not be stoned.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes; however, the epoxy need not be stoned.

5. Piercing shall be as indicated.

6. The enamel for Dash No. -2 shall match Chip No. 37038 of FED-STD-595.

7. Dash No. -1 and -3 may be manufactured using 22 karat gold plate with nickel underplating and a mirror-like polished finish which shall match TIOH Metal Finish Chip Number 9 for commercial sale only.

8. Attaching device shall be two prongs and clutches. The prongs shall be located on the vertical center line of the torch and equidistant from each end. For Dash No. -1 and -2, the prongs shall be 1 inch $\pm$ 1/32 inch (2.54 cm $\pm$ 0.08 cm) apart and for Dash No. -3, the prongs shall be 9/16 inch $\pm$ 1/32 inch (1.43 cm $\pm$ 0.08 cm) apart.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.