INCH-POUND

MIL-DTL-3628/51H
15 November 2008
SUPERSEDING
MIL-DTL-3628/51G
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, PATHFINDER, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

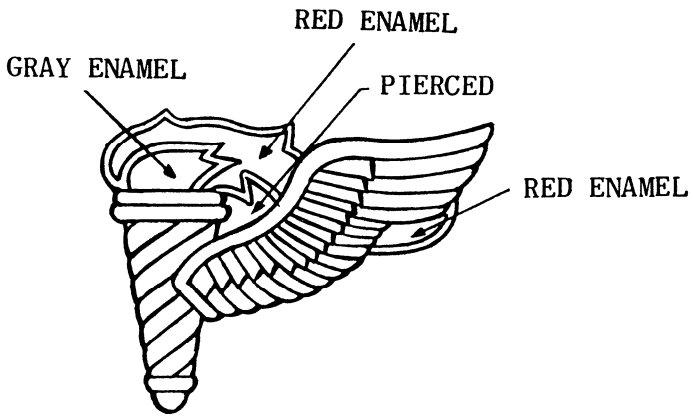

MATERIAL:
-1, -3: Gilding Metal
-2: Red Brass or Gilding Metal

DASH NO.
-1: Regular Size
-2: Regular Size, Subdued
-3: Dress Miniature Size

DIMENSIONS:

HEIGHT (overall):
-1, -2: 1-3/16 inches (REF)
-3: 11/16 inch (REF)
WIDTH (overall):
-1, -2: 1-1/2 inches (REF)
-3: 7/8 inch (REF)
THICKNESS (at thickest point of torch):
-1, -2: 0.100 inch $\pm$ 0.010 inch
-3: 0.075 inch $\pm$ 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.

FINISH:

-1, -3: Hard Enameled, Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

-2: Dull, Flat Black Enamel

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Red	1
Gray	27

3. Hard (Vitreous) enamel shall be smooth and flush with the dikes; however, the enamel need not be stoned.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes; however, the epoxy need not be stoned.

5. Piercing shall be as indicated.

6. The enamel for Dash No. -2 shall match Chip No. 37038 of FED-STD-595.

7. Dash No. -1 and -3 may be manufactured using 22 karat gold plate with nickel underplating and a mirror-like polished finish which shall match TIOH Metal Finish Chip Number 9 for commercial sale only.

8. Attaching device shall be two prongs and clutches located horizontally on the torch and the wing. For Dash No. -1 and -2, the prongs shall be 1 inch + 1/8 inch apart and for Dash No. -3, the prongs shall be 9/16 inch + 1/32 inch apart. The prongs shall be located at the intersection of the horizontal center line of the torch and wing.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH
(Project No. 8455-2009-008)

Review activities:
DLA - CT

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.