NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/51K
1 October 2020
SUPERSEDING
MIL-DTL-3628/51J
4 December 2015

DETAIL SPECIFICATION SHEET

BADGE, QUALIFICATION, PATHFINDER, U.S. ARMY

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

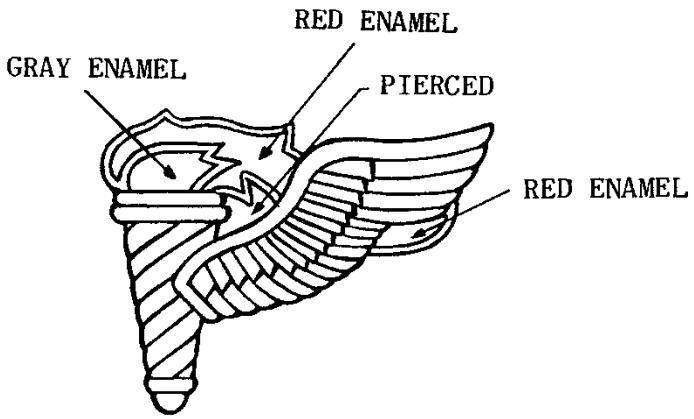

DASH NO.
-1: Regular Size
-2: Regular Size, Subdued
-3: Dress Miniature Size

MATERIAL:
-1, -2 and -3: Red Brass 85/15 (UNS Alloy No. C - 230)

FINISH:
-1 and -3: Epoxy resin 24K Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

-2: Dull Flat Black and shall match TIOH Metal Finish Chip Number 21.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
HEIGHT (Overall):
-1, -2: 1-3/16 inches (REF)
-3: 11/16 inch (REF)
WIDTH (overall):
-1, -2: 1-1/2 inches (REF)
-3: 7/8 inch (REF)
THICKNESS (At thickest point of torch):
-1, -2: 0.100 inch ± 0.010 inch
-3: 0.075 inch ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be two prongs and wing type clutch. Located horizontally on the torch and the wing.

2. -1 and -2, the prongs shall be 1 inch + 1/8 inch apart and for -3, the prongs shall be 9/16 inch + 1/32 inch apart. The prongs shall be located at the intersection of the horizontal center line of the torch and wing.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Gray	#27

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. -1 and -3 may be manufactured using 22 karat gold plate with nickel underplating and a mirror-like polished finish which shall match TIOH Metal Finish Chip Number 9 for commercial sale only.

4. If hard cloisonné enamel is used, the base material must be Gilding Metal 95/5 (UNS Alloy No. C-210).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2020-562)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:08Z
Check the source to verify that this is the current version before use.