INCH-POUND
A-A-50062A
30 August 2001
SUPERSEDING
A-A-50062
26 September 1993

COMMERCIAL ITEM DESCRIPTION

SCALES, SPRING, (SUSPENSION MOUNTED)

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) establishes the government acquisition requirements for suspension mounted spring scales to be used as accurate weighing instruments.

2. CLASSIFICATION. The scales shall be classified by the classes and sizes listed in table I. The selected class (see 7.5(b)) and size (see 7.5(c)) to be supplied shall be specified in the acquisition order.

2.1 Class 1. Class 1 scales shall be tubular with a flat front or recessed dial.

2.2 Class 2. Class 2 scales shall be heavy duty with a graduated face recessed in the housing with protected indicating elements.

TABLE I. Product classifications.

Class	Size	Capacity	Graduations
1	2	64 to 72 oz. (1800 to 2025 grams)	1oz. (25 grams)
	3	10 lbs.	1/4 lb. (4 oz.)
	4	20 to 25 lbs.	1/2 lb. (8 oz.)
	5	50 lbs.	1 lb.
	6	100 lbs.	1 lb.
2	4	200 lbs.	2 lbs.
	5	300 lbs.	5 lbs.
	7	500 lbs.	5 lbs.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6670

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Components. The scale shall consist of a calibrated tension spring with a load indicator connected to a shaft extending from one end of the housing. The dial face may be either a linear type or a round type. A load receiving element (hook) shall be attached to the end of the shaft.

3.2 Materials. The housing shall be of steel, brass, or plastic in accordance with the manufacturer's standard commercial product. A metal lume or ring shall be integral with the top of the housing.

3.3 Tolerances. Tolerances shall be as specified in table II.

TABLE II. Tolerances for scales (ounces, plus and minus).

Load	Scale capacity					
	72 oz.	10 lbs.	25 lbs.	50 & 100 lbs.	200 lbs.	300, 400, & 500 lbs.
In ounces:						
0 - 4	1/2					
5 - 8	1/2					
In pounds:						
0 - 3	1	1/2				
4 - 7		1	1	4		
8 - 11		1-1/2				
12 - 19			2		8	
20 - 29			3	8		
30 - 49				8		
50 - 74				8	8	
75 - 100				8	8	
Over 100					*	
0 - 125						*
0 - 125						*

* One half the value of the minimum graduation intervals.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Packaging. Unless otherwise specified in the acquisition order (see 7.5(d)), the scales shall be packaged in accordance with American Society for Testing Materials (ASTM) D 3951, "Standard Practice for Commercial Packaging" (DoD adopted).

7. NOTES

7.1 Part or identification number (PIN). The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

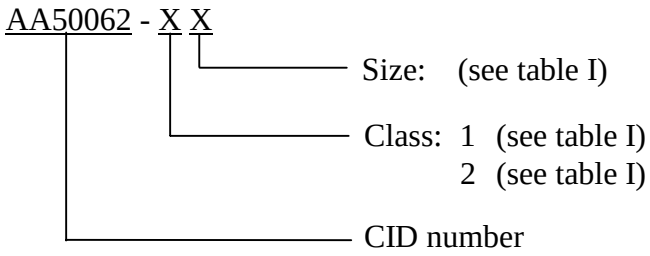

7.2 Sources of documents.

7.2.1 FAR. The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from http://www.arnet.gov/far/.

7.2.2 ASTM standards. Copies of ASTM standards may be obtained from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

7.3 National stock numbers (NSN). The following is a list of NSNs that correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

NSN	Class	Size	NSN	Class	Size
6670-00-618-5662	1	2	6670-00-240-5831	1	6
6670-00-240-5821	1	3	6670-00-246-0347	2	4
6670-00-246-0346	1	4	6670-00-242-8638	2	5
6670-00-254-4634	1	5	6670-00-224-7736	2	7
6670-00-164-0567	1	6			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.

7.4 Sources of supply. The manufacturers and/or suppliers listed below are known to supply products that meet the salient characteristics requirements of this document. Competition is not limited to the listed firms.

Chatillon and Sons Inc. Kew Gardens, NY 11415	Itin Scale Co., Inc. Brooklyn, NY 11223
The Scale People, Inc. Newport News, VA 23606	McMaster-Carr Los Angeles, CA 90054

7.5 Ordering data. Acquisition documents must specify the following information:

a. CID document number, revision, and CID PIN
b. Class (see 2)
c. Size (see 2)
d. Packaging and packing requirements (see 6.1)

7.6 Subject term (key word) listing.

dial
graduation
hook
load indicator
lume

MILITARY INTERESTS:

Custodians:
Army - GL
Navy - YD
Air Force - 99

Reviewer:
Navy - MS

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - 7FXE

Preparing activity:
DLA - GS1

(Project 6670-0211)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:38Z
Check the source to verify that this is the current version before use.