MILITARY SPECIFICATION

COUNTERMEASURE, CHAFF: M-1

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the parts and assembly for one type of chaff payload designated as countermeasure, chaff: M-1, hereafter referred to as the chaff unit.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specification and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Table for Inspection by Attributes
MIL-STD-810 - Environmental Test Methods

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

FSC 5865

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:25Z
Check the source to verify that this is the current version before use.

DRAWINGS (See 6.5)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

PRODUCT AND PACKAGING DRAWINGS

9311402 - Countermeasure, Chaff: M-1
9313760 - Packing and Marking for Box, Exterior for Chaff, Countermeasure: M-1

INSPECTION EQUIPMENT DRAWINGS

9311451 - Payload Module Assembly
9311434 - Dispenser Assembly
9311428 - Breech Plate Assembly
9311660 - Cartridge Impulse M796

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications and standards.

3.2 Assembly. The assembly shall comply with all requirements specified on Drawing (Dwg.) 9311402 and with all requirements in applicable specifications and standards.

3.3 Environmental requirements. The chaff units shall remain functional after being subjected to the environmental tests as specified in 4.5.1.

3.3.1 Humidity. The chaff units shall remain functional after being subjected to test as specified in 4.5.1.1.

3.3.2 Transportation vibration. The chaff units shall remain functional after being subjected to test as specified in 4.5.1.2.

3.3.3 Helicopter vibration. The chaff units shall remain functional after being subjected to test as specified in 4.5.1.3.

3.4 Static firing test. The chaff units fitted with an M796 Impulse Cartridge shall be fired from a suitable fixture. After firing, not more than 5% by weight of the chaff shall remain in the cartridge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

3.5 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.6 Workmanship. All parts and assemblies shall be fabricated and finished in a thorough workmanlike manner and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be free of burrs, chips, sharp edges, cracks, crazes, unblended radii, porosity, warpage, cold flow, shrinkage, checks, chipped edges, blisters, excess flash, dirt, and other defects and foreign matter which would affect their serviceability. The cleaning method used shall not be injurious to any part or assembly nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat, legible and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspections shall be conducted on this item.

a. First article inspection
b. Quality conformance inspection

4.3 First Article Inspection

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer. The first article sample shall consist of the specified number of complete sets of parts and sub-assemblies (see Table 1) including at least five (5) items from each cavity used to produce molded parts and be so identified as to permit tracing each item to the cavity in which it was molded.

4.3.2 Inspections to be performed. See MIL-A-48078 and Table 1 specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

TABLE 1. First article inspection

CLASSIFICATION OF DEFECTS & TESTS MIL-C-63106A(AR)

PARAGRAPH	TITLE: M-1 Countermeasure Chaff		SHEET 1 OF 1		DRAWING NUMBER: See Below NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Case, Cartridge (Dwg. 9311632)				
	Examination for defects	5/ cavity	-	3.2	4.4.2.3
	Piston (Dwg. 9311633)				
	Examination for defects	5/ cavity	-	3.2	4.4.2.1
	Cap, End (Dwg. 9311636)				
	Examination for defects	5/ cavity	-	3.2	4.4.2.2
	Chaff, Glass (Dwg. 9311551)				
	Examination for defects	10	-	3.2	4.4.2.4
	Countermeasure, Chaff, M-1 (Dwg. 9311402)				
	Examination for defects	90	-	3.2	4.4.2.5
	Humidity	(a)	-	3.3.1	4.5.1.1
	Transportation-vibration	(a)	-	3.3.2	4.5.1.2
	Helicopter vibration	(a)	-	3.3.3	4.5.1.3
	Static firing test	(a)	-	3.4	4.5.2

NOTES:
(a) After examination for defects, the same sample of 90 shall be subjected to these tests in the sequence indicated.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.2 Examination. (See MIL-A-48078).

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Tests tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

TABLE II

ACCEPTANCE TESTING

Inspection Lot Size	Sample Size	Accept	Reject
00 - 1,000	30	0	1
1,001 - 3,000	60	1	2
3,001 - 10,000	90	2	3
10,001 - 35,000	120	3	4
35,001 - 150,000	210	5	6

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:25Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Piston	1 OF 1	9311633
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	*			
Major					
101	Hole diameter, max		0.40%	3.2	Gage/4.5.4
102	Squareness, max, at front face		0.40%	3.2	Gage/4.5.4
Minor					
201	Hole position		0.65%	3.2	Gage/4.5.4
202	Cross-sectional thickness of face		0.65%	3.2	Gage/4.5.4
203	Evidence of poor workmanship		1.00%	3.6	Visual

NOTES: *See 4.5.4 For Qualification and Production Control of Mold Cavities.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.2	Cap, End		9311636
			NEXT HIGHER ASSEMBLY 9311402

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	*			
Major					
101	Length and width (datums A & B)		0.40%	3.2	Gage/4.5.4
102	Overall length & width		0.40%	3.2	Gage/4.5.4
Minor					
201	Angle height (From "O" Ring Cavity)		0.65%	3.2	Gage/4.5.4
202	Angle		0.65%	3.2	Gage/4.5.4
203	"O" Ring height		0.65%	3.2	Gage/4.5.4
204	Evidence of poor workmanship		1.00%	3.2	Visual

NOTES: *See 4.5.4 For Qualification and Production Control of Mold Cavities.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Case, Cartridge				9311632
					NEXT HIGHER ASSEMBLY 9311402
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined	*			
Major					
101	Overall length		0.40%	3.2	Gage/4.5.4
102	Exterior squareness (see note 6 on dwg.)		0.40%	3.2	Gage/4.5.4
103	Interior depth to Piston shoulder from base end		0.40%	3.2	Gage/4.5.4
104	Impulse cartridge hole diameter		0.40%	3.2	Gage/4.5.4
105	Height of gas seal lip (see detail C)		0.40%	3.2	Gage/4.5.4
106	Lip thickness (see detail C)		0.40%	3.2	Gage/4.5.4
Minor					
201	Wall thickness		0.65%	3.2	Gage/4.5.4
202	Location, end cap pin hole		0.65%	3.2	Gage/4.5.4
203	Evidence of poor workmanship		1.00%	3.6	Visual

NOTES:

*See 4.5.4 For Qualification and Production Control of Mold Cavities.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9311551
4.4.2.4	Chaff, Glass				NEXT HIGHER ASSEMBLY 9311402
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	"J" band length		0.40%	3.2	Gage
102	"I" band length		0.40%	3.2	Gage
103	"H-I" band length		0.40%	3.2	Gage
Minor					
201	"J" band weight		0.65%	3.2	Gage
202	"I" band weight		0.65%	3.2	Gage
203	"H-I" band weight		0.65%	3.2	Gage
204	Evidence of poor workmanship		1.00%	3.6	Visual

NOTES:

DESC-R-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Spacer				9311635
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	Squareness, max.		0.65%	3.2	Gage
202	Thickness		0.65%	3.2	Gage
203	Evidence of poor workmanship		1.00%	3.6	Visual
NOTES:					

DSCR-QA Form 160 Jul 77

10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Countermeasure, Chaff, M-1				9311402
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Component missing, loose or damaged or not installed in required sequence (See Note 1)		0.40%	3.2	Visual/Manual
102	Static firing test	(a)	0.40%	3.4	4.5.2
103	Lugs on end cap fail to engage holes in cartridge case		0.40%	3.2	Visual/Manual
Minor					
201	Evidence of poor workmanship		1.00%	3.6	Visual

NOTES:
(1) Looseness shall be indicated by the shifting of the contents of the cartridge when shaken
(a) Sample size shall be in accordance with Table II.

DESC-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.7	Packing and Marking for Box, Fiberboard for Chaff, Countermeasure: M-1	1 OF 1	9313761
			NEXT HIGHER ASSEMBLY: 9313760

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any packing component missing		0.40%	5.1	Visual
102	Incorrect number of chaff units		0.40%	5.1	Visual
103	Markings missing, incomplete or illegible		0.40%	5.1	Visual
Minor					
201	Box not securely closed		0.65%	5.1	Visual
202	Evidence of poor workmanship		1.00%	3.6	Visual

NOTES:

DESC-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106A(AR)

PARAGRAPH 4.4.2.8	TITLE Sealed Barrier Bag, Prior to Packing in Box		SHEET 1 OF 1		DRAWING NUMBER 9313760 NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Loss of vacuum in barrier bag 1/		0.40%	5.2	Visual/Manual
102	Box crushed to the extent that contents could be damaged 2/		0.40%	5.2	Visual
Minor					
201	Heat seal of barrier bag located so that one or more subsequent seals cannot be applied		0.65%	5.2	Visual
202	Marking of bag misleading or undentifiable		0.65%	5.2	Visual
203	Evidence of poor workmanship		1.00%	3.6	Visual

NOTES:
1. Vacuum loss is indicated by failure of the bag to cling tightly about the contents.
2. Packing should be opened if there is evidence of crushing.

DSDLR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63106A(AR)

PARAGRAPH 4.4.2.9	TITLE Packing and Marking for Box, Exterior for Chaff, Countermeasure: M-1		SHEET 1 OF 1		DRAWING NUMBER 9313760 / NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any barrier bag or filler missing		0.40%	5.2	Visual
102	Number of boxes, incorrect		0.40%	5.2	Visual
103	Exterior markings missing, incomplete or illegible		0.40%	5.2	Visual
Minor					
201	Separator missing between barrier bag and any wood surface		0.65%	5.2	visual
202	Evidence of poor workmanship		1.00%	3.6	Visual

NOTES:

DESC-R-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First Article and Quality Conformance Inspection tables.

4.4.4 Inspection Equipment. The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and Section 6 herein.

4.5 Test methods and procedures

4.5.1 Environmental tests. The chaff units shall be mounted in an approved fixture for the following tests.

4.5.1.1 Humidity. Prior to testing the M796 Impulse Cartridge (Inert) shall be assembled to the M-1 Chaff Cartridge and the Chaff Cartridge inserted in the Payload Module Assembly (Dwg. 9311451). Both are G.F.E. Test in accordance to MIL-STD-810, Test Method 507.1, Procedure I, (10 days). After test, the Chaff units shall be inspected for damage.

4.5.1.2 Transportation vibration. After humidity test, the Chaff units are vibrated in accordance with MIL-STD-810, Test Method 514.2, Procedure X, using curve AW. After test, the Chaff units shall be visually examined for damage.

4.5.1.3 Helicopter vibration. Following transportation vibration, the sample units will be tested in accordance with MIL-STD-810, Test Method 514.2, Procedure IIC. The Chaff units shall be visually examined for damage prior to static firing test of 4.5.2.

4.5.1.3.1 Vibration - Axis orientation.

a. Payload Module/Item Assembly Test Axis Orientation should be as shown in Figure I.

b. Orientation/Mounting of Payload Module Assembly to the vibration table for each of the three axis should be such that the open end of the Payload Module Assembly is at the top with the Chaff Cartridge in place and the Inert Impulse Cartridge assembled at the bottom as shown in Figure I.

c. To best meet the vibration requirements for the Longitudinal Axis and Transverse Axis it is recommended that a slip plate should not be used. In lieu of utilizing the slip plate, the vibrator should be turned 90° and the Payload Module Assembly attached/positioned to maintain orientation as indicated in para. b.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

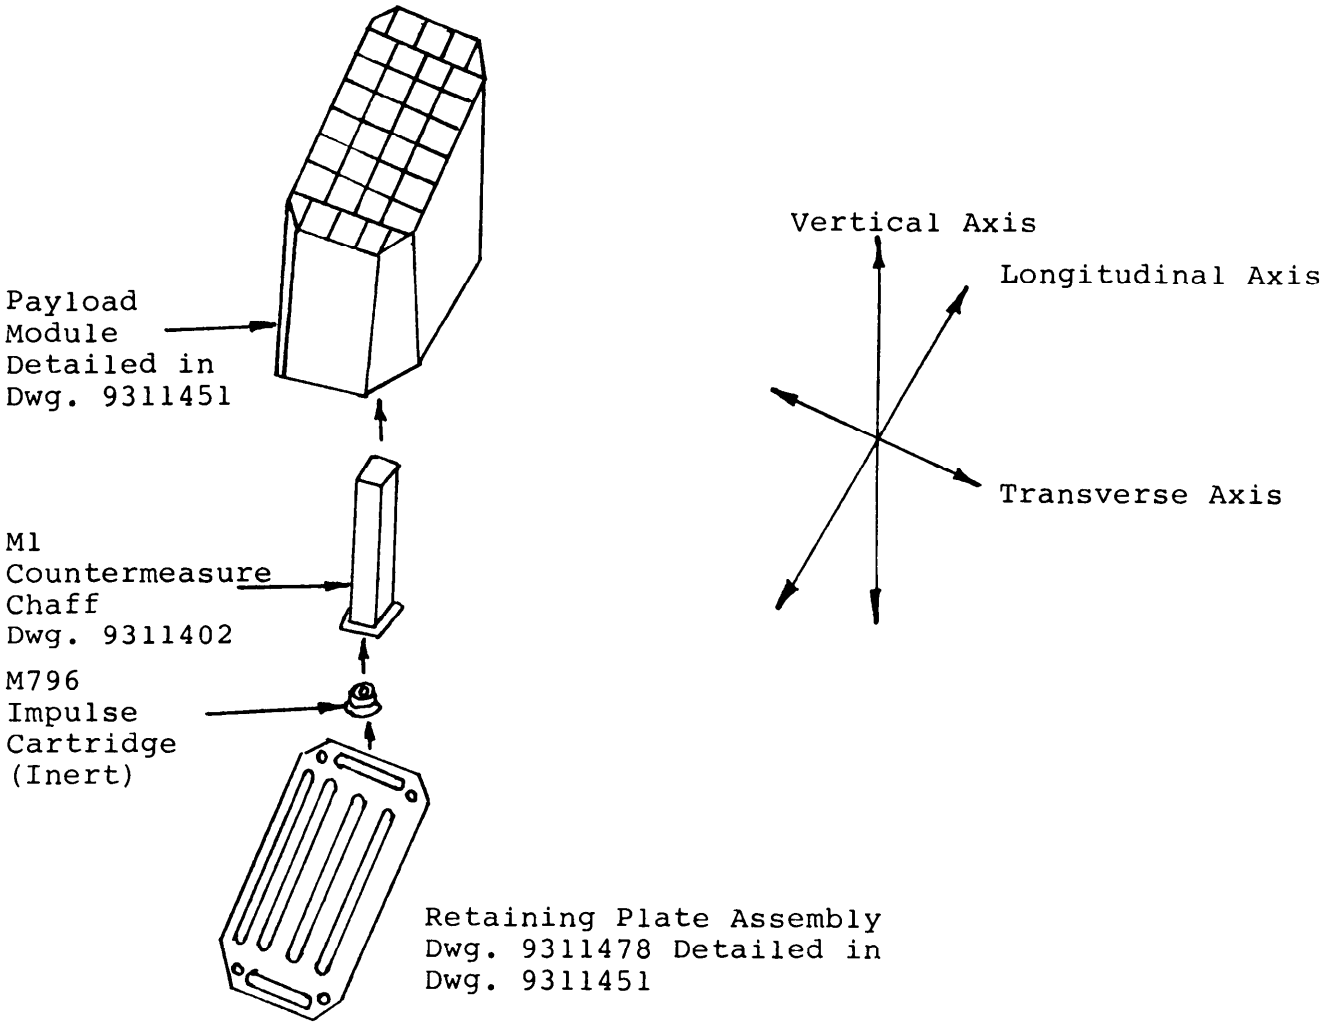


Figure I Vibration Axis Orientation

d. It is required that the stud nuts be replaced with high strength rods threaded on both ends in order to secure the Payload Module Assembly containing test items to the vibrating table attachment plate (Ref. Dwg. 9311428). Use a washer and two nuts on each rod.

4.5.2 Static firing test. (See 3.4). The M796 Cartridge (Dwg. 9311660) shall be assembled to the M-1 Chaff Cartridge and inserted in the Dispenser Assembly (Dwg. 9311434). Both are G.F.E. The M-1 Chaff Cartridge shall be fired from an approved fixture in accordance with para. 4.4.4 for First Article Testing. Any Chaff Payload failing to eject and function shall be cause for rejection of the First Article Sample. Accept/Reject Criteria for lot acceptance shall be in accordance with Table II. (Test axis orientation should be as shown in Figure II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

4.5.3 Melt flow rate. The melt flow rate shall be determined in accordance with the test procedure specified in ASTM D1238. Observation shall be made for compliance with the applicable drawing requirement.

4.5.4 Dimensional control of molded or plastic parts. In place of normal sampling and inspections associated with the Classification of Defects, and after a curing time for the parts has been approved (see Note 1) a sample of three (3) parts (as molded) from each cavity shall be fully inspected dimensionally to qualify a new or reworked cavity for use in production. The molded parts shall carry the individual cavity identification. As a control of the cavity during production, the above quantity of parts from each cavity shall be inspected for at least the defects listed in paragraph 4.4.2.1 through 4.4.2.3 after continuous production of each 5,000 parts or at the end of each week, whichever occurs first. Of the three (3) samples; one (1) sample shall be the last part produced. If any defective parts are found during qualification of the cavity, the cavity producing the defective part will not be used in production. If any defective parts are found when inspection is performed for the control of the cavity, the cavity producing the defective part shall be removed from production. Further, that portion of production since the last control check shall be returned to the contractor for inspection for each separate type of defect according to MIL-STD-105, using an AQL of 0.40 percent for each major defect and an AQL of 0.65 percent for each minor defect. All cavities removed from production because of some fault, may, after reworking be returned to production providing they pass the qualification test above. The contractor may request a change of inspection frequency providing he presents objective evidence to the Contracting Officer to substantiate the request. Contractor design of gages and test equipment required to perform the inspections listed herein shall be submitted per 6.3 for approval prior to manufacture of equipment. The noted subparagraphs identify those items and minimum inspections subject to the requirements of this paragraph.

NOTE 1: In establishing a curing time, dimensionally check ten (10) parts from each cavity at periodic intervals (e.g. every 30, 60, etc. mins.) until dimensional stability is attained. The curing time will be from the time the part comes out of the mold until dimensional stability is attained. The inspection data used in determining the curing time shall be sent to ARRADCOM, Dover, New Jersey 07801, ATTN: DRDAR-QAT-M. If there is a change in material, or in the cycle time, or if a cavity is reworked, or a new cavity is used, a new curing time shall be established and approved.

5. PACKAGING

5.1 Packaging. Packaging shall be as specified in Dwg. 9313761.

5.2 Packing and Marking. Packing and marking shall be as specified on Dwg. 9313760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The components covered by this specification are intended for use on the Countermeasure, Chaff: M1.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078). Submit equipment designs as required, to Commander, U.S. Army Armament Research and Development Command, ATTN: DRDAR-QAT-I, Dover, New Jersey 07801.

6.4 Distribution of ammunition data cards. Distribution of data cards shall include the following: Commander, U.S. Army Armament Research and Development Command, ATTN: DRDAR-QAT-M, Dover, New Jersey 07801.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARRADCOM.

6.6 Changes from Previous Issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 5865-A037)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Armament R & D Command
ATTN: DRDAR-QA
Dover, NJ 07801

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:25Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-63106A (AR)	Countermeasure, Chaff: M-1

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:25Z
Check the source to verify that this is the current version before use.