MILITARY SPECIFICATION

FUZE, ROCKET: M433
LESS BOOSTER AND BOOSTER LEAD

This specification is approved for use by the US Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification contains requirements not normally covered by the drawings and provide quality assurance provisions for the fabrication of parts and the manufacture, assembly and packing of fuze Rocket: M433, with detonator less booster and booster lead for the 2.75 Inch Folding Fin Aerial Rocket.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for

MIL-D-45495 - Detonator, Electric M84, Parts for and loading, assembling and packing

STANDARDS

MILITARY

MIL-STD-202 - Test methods, electrical and electronic components
MIL-STD-331 - Fuze and fuze components environmental and performance tests for
MIL-STD-750 - Test Method for Semiconductor Devices

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:26Z
Check the source to verify that this is the current version before use.

DRAWINGS (See 6.7)

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

PRODUCT AND PACKAGE DRAWINGS

9260702 - Support, Top (within M2A1 Box)
9260703 - Support, Bottom (within M2A1 Box)
8864492 - Box, Ammo, Metal, for Artillery Type and Rocket Fuzes
8886458 - Box, Pallet Type, Wirebound, Packing Ammunition for Artillery Type and Rocket Fuzes (with M2A1 Box) Container, Ammo, Fiber, PA 29, For Rkt.
9221050 - 2.75 In: Warhead: M230
9230116 - Box, Packing - Ammunition for Rocket 2.75 Inch:
2-R-376 - 2.75 In: Warhead: M230 Photo Flash
9260701 - Fuze, Rocket, M433 with Booster and Booster Lead
9260886 - Fuze, Rocket, M433, Less Booster and Booster Lead
9260924 - Secondary Standard for M433 and M439 Fuze Production Acceptance
9260925 - Umbilical Continuity Tester

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement function should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposals shall apply.

CODE OF FEDERAL REGULATIONS

Title 49 - Transportation, parts 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, US Government Printing Office, Washington, D.C. 20402. Orders shall specify 49 CFR 100-199).

3. REQUIREMENTS

3.1 Materials.- Materials shall be in accordance with applicable drawings and specifications.

Source: https://assist.dla.mil - Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

3.2 Molded or plastic components. - All molded and plastic components shall be in accordance with applicable drawings and specifications.

3.3 Fuze Assemblies and Parts. - The fuze assemblies and parts shall comply with all requirements specified on drawing 9260886 and associated drawings and with all requirements specified in applicable standards and specifications. Ambient temperature is defined as $70^{\circ}F \pm 15^{\circ}F$ unless otherwise specified.

3.3.1 Spring Embrittlement. - None of the springs used in the fabrication of the Safety and Arming Device (S&A) shall break when extended to the point of minimum permanent distortion.

3.3.2 Spring Set. - The setback spring dwg. 8883718, after being subjected to a temperature of 175 - 180 F at a compressed length of .750 inch for 24 hours and then allowed to cool at ambient for 24 hours, shall return to within .015 inch of its original free length.

3.3.3 Detonators. - Detonators prior to assembling to rotors, shall meet the requirements of MIL-D-45495.

3.3.4 Rotor Assembly. - Dwg. 9260769 - The Rotor Ground Strap shall contact the detonator socket pin within a distance of .030" to .040" from the rotor's outside diameter.

3.3.5 Top Plate Assembly. - Dwg. 9260760.

3.3.5.1 Pin Receptacles. - The female contacts shall present a minimum retention force of 3 oz. to a .025 inch diameter pin insert.

3.3.6 Fuze Body Assembly. - Dwg. 9260888.

3.3.6.1 Umbilical Assy. - The Umbilical Assembly shall withstand a straight pull-out force of 10 pounds applied at the Coaxicon Umbilical Contact Assembly without breaking the adhesive seal or the cable continuity.

3.3.6.2 Umbilical Assembly. - Dwg. 9260889. The insulation resistance at 500 VDC shall be greater than 10 megohms and the continuity shall be less than 0.5 ohm when tested as per MIL-STD-202.

3.4 Electronics Module Assembly (Module). - Dwg. 9260878; Appendix B Diagram 3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-02-07T04:32:57Z
Check the source to verify that this is the current version before use.

3.4.1 Module Time Delay Function (Drawings 9260685, 9260878.)

a. After shorting pins 5,6 and 4 together for four seconds, the electronic module shall be capable of accepting a setting charge and exhibiting a corresponding time delay as listed in Table I. The positive voltage applied to Pin 1 referenced to Pin 4 shall be followed by the negative voltage as shown in Table I Vc1 and Vc4 respectively. The time of applied voltage shall be 6 MS for Vc1 and 40 msec for Vc4. These voltages will be supplied thru a 47 ohm series resister to pin 1 with reference to ground connected to Pin 4. The time delay shall be the time interval from the time Pin 2 is connected to Pin 4 and the leading edge of the output pulse exits pin 3. The firing output (Pin 3) pulse shall provide at least 1000 ERGS of energy in less than 100 msec into an M84 detonator or a resistor of 3.5 ± 1.5 ohms. Record the input, voltages, time interval and energy (greater than, equal or less than) output by serial # of fuze or fuze lot #. The 20MS, 200MS and 600MS settings shall be used for First Article and Production information tests thru lot 4. All other settings are for First Article information only.

b. The remaining settings shall be recorded for information only.

c. SAIE setter (Secondary Standard for M433 and M439 fuze Production Acceptance) to be used for delay time acceptance tests in all cases.

d. A seven (7) second time delay shall follow the charging of each module and before the module timing circuit is tripped.

TABLE I

	CAPACITOR INPUTS (CHARGE & GROUND)		OUTPUTS
Time Delay	Vc1 (Timing)	Vc4 (Firing)	Function Time Delay
SETTING	(+) VOLTS	(-) VOLTS	MILLISECONDS
20MS	0.51	-15.49	5 to 35
50MS	1.24	-14.76	35 to 65
100MS	2.36	-13.64	85 to 115
200MS	4.33	-11.67	175 to 225
300MS	5.96	-10.04	260 to 340
400MS	7.31	-8.69	350 to 455
500MS	8.44	-7.56	435 to 570
600MS	9.38	-6.62	520 to 685

Source: https://assist.dla.mil -- Downloaded: 2026-02-07T04:32ZZ
Check the source to verify that this is the current version before use.

3.4.2 Module Turn on Time. - After applying - 16VDC to Pin 1 for 100 msec; wait 7 sec and then short pin 2 and 4 together. An output plus shall appear at Pin 3 within 600 microsecond of the shorting of Pin 2 & 4.

3.5. M433 S&A Device w/o Switch (S&A).-Dwg. 9260751.

3.5.1 Separation of Annular Gear from #2 Gear & Pinion Assy The separation distance between the annular gear and #2 gear & pinion, when the rotor and #2 gear are at their extreme separated position in the S&A, shall be .038 inch maximum.

3.5.2 Rotor Reset Capability.- The rotor assembly in the S&A, after being rotated between 26 degrees and 35 degrees from the safe position and then released, shall without external assistance and in a continuous motion, be returned by the spring loaded setback weight to its fully safe and locked position.

3.5.3 Setback Weight Return Capability. - The setback weight in the S&A, after being bottomed to the base of the rotor housing by a force of 20lbs. applied equally to its two top surfaces and then released, shall return in a continuous motion to the fully safe position of locking the rotor.

3.5.4 Alignment of Detonator Cavity. - The detonator cavity when the rotor is in the free armed detented position, shall be in line with the outside diameter of the rotor housing within .060 in. T.I.R. functionally.

3.5.5 Height of Rotor Assy. - The height of rotor above the inside surface of the rotor housing, with rotor in safe position, shall be 1.030 in. max.

3.6 M433 S&A Assembly (S&A Assy.). - Dwg. 9260750.

3.6.1 Pull - off Tests.

3.6.1.1 Pull - off Test of Insulator. - The insulator shall be capable of withstanding a pull-off force of 2 pounds without separating from the switch pin.

3.6.1.2 Pull - off Test of Switch Pin. - The switch pin shall be capable of withstanding a pull-off force of 5 pounds without separating from the "g" weight assembly.

3.6.2 Continuity. - Dwgs. 9260750 & 9260756. - The M433 S&A Assy, Dwg. 9260750, shall satisfy the continuity requirements specified in Table II of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-12-26T04:32:57Z
Check the source to verify that this is the current version before use.

3.6.3 Insulation Resistance. - Dwgs. 9260750 & 9260756. The M433 S&A Assy, Dwg. 9260750, shall satisfy the insulation requirements specified in Table II of this specification.

TABLE II

Position of S&A Dev.	Terminals	Requirements
Safe	#1 & #2 (Charge Switch)	30 Megohms Min. @ 500 VDC
Safe	#1 & #5 (Charge Switch)	100 Milliohms Max.
Armed	#1 & #5 (Charge Switch)	30 Megohms min @ 500 VDC

3.6.4 Non-arming. - The rotor assembly in the loaded S&A shall not arm when subjected to an arming acceleration of 12.00g's minimum for a period of 5 seconds.

3.7 M433 S&A Assembly (S&A Assy Loaded). Dwg. 9260750. - Appropriate safety precautions shall be taken in testing for the following requirements.

3.7.1 Continuity through detonator (Armed). - The resistance measured between the detonator socket pin and speed clip or between terminal #3 and #4 shall be 3.5 ± 1.5 ohms. Caution- Any continuity measurement which shall pass electrical current through the detonator shall be limited to one milliampere maximum.

3.7.2 S&A Arming

3.7.2.1 Ambient Temperature Arming. - The S&A device, after conditioning at a temperature of $70^{\circ} \pm 15^{\circ}$F. for 2 hrs.minimum, shall arm between 0.92 and 1.19 seconds when subjected to an arming acceleration of 40.0 ± 0.5g.

3.7.2.2 Low Temperature Arming. - The S&A sevice after being conditioned at a temperature of $-60^{\circ} + -5^{\circ}$F for 3 hrs. minimum, shall arm between 1.15 and 1.57 seconds when subjected to an arming acceleration of 27.0 ± 0.5 g.

3.7.2.3 High Temperature Arming. - The S&A device after being conditioned at a temperature of $+155^{\circ} + 5^{\circ}$F. for 3 hrs. minimum shall arm between 0.92 and 1.19 seconds when subjected to an arming acceleration of 40.0 ± 0.5 g.

3.7.3 S&A Position. - The safe position of the S&A shall be verified just before insertion into the fuze body. After insertion of the S&A, fuze handling shall be controlled to preclude any chance of inadvertent arming or subsitution of the S&A until assembly of the booster housing.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

3.7.4 Load Test of Detonator. - The detonator shall not move more than .005 inch when a push out force of 5 pounds is applied to the detonator socket.

3.8 Fuze Assembly. - Dwg. 9260886.

3.8.1 Fuze Arming.

3.8.1.1 Ambient Temperature Fuze Arming Time. - The fuze assembly, after conditioning at a temperature of $70^{\circ} \pm 15^{\circ}$F. for 2 hrs. minimum, shall arm between 0.88 and 1.25 seconds when subjected to an arming acceleration of 40.0 ± 0.5 g.

3.8.1.2 Low Temperature Arming Time. - The fuze assembly after being conditioned at a temperature of $-60^{\circ} \pm -5^{\circ}$F. for 8 hrs. minimum, shall arm between 1.08 and 1.65 seconds when subjected to an arming acceleration of 27.0 ± 0.5 g.

3.8.1.3 High Temperature Arming Time. - The fuze assembly after being conditioned at a temperature of $+155^{\circ} + 5^{\circ}$F. for 8 hrs. minimum shall arm between 0.88 and 1.25 seconds when subjected to an arming acceleration of 40.0 ± 0.5 g.

3.8.2 Charge Circuit Continuity. - (Fuze Unarmed). - The continuity of the charge circuit through its umbilical, shall be checked using SAIE (Umbilical Continuity Tester).

3.8.3 Charge-Arm-Function. - The fuze assembly shall be charged through its umbilical terminals, armed in accordance with fuze requirement 3.8.1.1 and shall, upon the closure of its canopy switch, exhibit corresponding function time delays as shown in Table VI (continued), Paragraph 4.

3.8.4 Environmental Conditioning.

3.8.4.1 The fuze, Dwg. 9260886, shall meet all performance requirements after being subjected to any one or combination of the following environmental conditions.

a. Temperature conditions at $-60^{\circ} \pm 5^{\circ}$F., ambient ($70^{\circ} \pm 15^{\circ}$F); $+155^{\circ} \pm 5^{\circ}$F., for a minimum of 8 hours after stabilization.

b. Fuze Seal Leakage. - Dwg. 9260886. Fuze assemblies shall not exhibit a leakage rate greater than 1×10^{-3} STD. cc/sec. when subjected to leak detection test 118 of MIL-STD-331, using a test pressure of 15 ± 0.5 psig and procedure 6.9 or an equivalent procedure having a minimum sensitivity of 1×10^{-3} STD. cc/sec.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

c. Temperature and humidity per MIL-STD-331, Test 105.1, limited to one 14 day cycle.

d. Thermal shock - The fuze shall withstand the Thermal Shock Test per MIL-STD-331, Test 113.

3.8.5 Safety

3.8.5.1 Non-Arming. - The fuze shall not arm when subjected to an arming acceleration of 12.0 ± .5g for a minimum of 5 seconds.

3.8.5.2 Mechanical Interrupter. - The fuze shall be incapable of being charged in the armed condition.

3.8.5.3 Jolt and Jumble. - The fuze assembly shall be subjected to and must withstand the Jolt Test specified in MIL-STD-331, with the exception that the fuze shall not be disassembled and inspected after the Jolt Test. After completion of the Jolt Test, the same fuze shall be subjected to and must withstand the Jumble Test specified in MIL-STD-331.

3.8.5.4 Forty-Foot Drop. - The complete fuze warhead and motor assembly shall withstand the Forty-Foot Drop Test specified in MIL-STD-331. To satisfy the requirements of MIL-STD-331, the disassembled fuze must display the following conditions:

a. No loose explosive material shall be present in the fuze body assembly.

b. The lock roller pin on the rotor shall not be broken.

c. The rotor shall be in the safe position, secured such that it cannot be turned to the armed position with finger pressure.

d. The g-weight shall be in the fully safe position.

3.9 Fuze Assembly Operational Test. - The fuzes shall be subjected to and must withstand the following operational tests: Five-Foot Drop Test, Non-Environmental Test - Non-Arm and Arming Times only; Ballistic Test; Helicopter Vibration Test, (See Appendix A).

3.10 Fuze Firing. - The fuze assembly shall function the detonator high order when properly charged and armed.

3.11 Ballistic Firing Test. - The fuze shall be subjected to and function, as intended when subjected to this test.

Source: https://assist.dla.mil -- Downloaded: 20261122T071432Z
Check the source to verify that this is the current version before use.

3.12 Data Requirements. - The contractor shall generate data in accordance with the requirements of the data item description cited in 4.5.37.

3.13 First Article Inspection. - This specification makes provisions for first article inspection, (see Table III). Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.14 Workmanship.

a. Mechanical. - All parts and assemblies shall be free from burrs, chips, sharp edges, cracks, unblended radii, surface defects, dirt, grease, rust, porosity, warpage, burn marks, checks, blisters, excess flash, corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agents. Surface coating shall be continuous except for a few slight scratches not exposing base material. The loading and assembly operations shall be performed in a thorough, workmanlike manner consistent with the best practices of the industry. All required markings shall be neat and sharply defined.

b. Electrical. - Cable assemblies and wires shall be dressed in such manner as to prevent pinching or chafing of the wire insulation. Ends of wires shall be free from burrs, sharp edges, or points. All parts shall be free from flux, chips, dirt, grease, rust of foreign material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection and Standard Quality Assurance Provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of Inspection. - The following types of inspection shall be conducted on this item:

a. First Article Inspection

b. Quality Conformance Inspection

4.3 First Article Inspection

4.3.1. Submission. - The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of the following items in sample quantities as indicated:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:55Z
Check the source to verify that this is the current version before use.

PART DESCRIPTION	DRAWING	QUANTITY
Device, Safety and Arming w/o Case Assy	9260751	25
433 S&A Assembly	9260750	25
Rotor Housing Assembly	9260767	10
Spring, Detent	8883713	10
Spring, Setback Weight	8883718	20
Gear and Pinion Assembly No. 1	8883703	25
Gear and Pinion Assembly No. 2	8883700	25
Escapement Gear and Pinion Assembly	8883710	25
Lever Assembly	9260776	30
Rotor Assembly	8883744	20
Inner Plate Assembly	9260804	20
Escapement Assembly	9260774	20
Strap, Rotor Ground	9260772	20
Contact Female	9260762	20
Speed Clip	9260891	20
Housing, Booster	8883682	25
Stud, Spring	8883721	10
Pin Interfacing	9260697	40
Impact Sensor Probe	9260736	25
Housing, Rotor	9260768	10
Contact Female #3	9260759	20
Setback Weight Assembly	9260752	25
Case Assembly	9260756	25
Case	9260758	25
Top Plate Assembly	9260760	25
Socket, Detonator	9260773	25
Contact	9260875	25
Molded Electronics Assembly (Mold)	9260878	25
Molded Electronics Assembly (Mold)	9260878	5 per cavity
Fuze Protector	9260879	25
Body	9260883	25
Connector	9260885	25
"O" Ring	MS28775	25
Fuze Rocket, M433, Less Booster and Booster Lead	9260886	228
Body Assembly	9260888	25
Electronic Assembly	9260685	25
Electronic Module Assembly	9260887	702

4.3.2 Inspections to be Performed. - See MIL-A-48078, Table III and Table IV specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

4.3.3 Rejection. - See MIL-A-48078.

4.3.4 Process Specification Plastic Parts. - When a multiple cavity mold is used in the fabrication of plastic components, five (5) components from each mold cavity shall be included in the First Article Sample. The components shall bear a mark which identifies the component with the individual cavities.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:52Z
Check the source to verify that this is the current version before use.

TABLE III - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 8		DRAWING NUMBER
	Fuze, Rocket, M433, Less Booster and Booster Lead and Components				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Device, Safety and Arming w/o Case Assembly (Dwg. 9260751)				
	Examination for Defects	25	--	3.3	4.4.2.1
	Load Test of Detonators	25	--	3.7.4	4.5.9
	Setback weight return capability	25	--	3.5.3	4.5.11
	Rotor reset Capability	25	--	3.5.2	4.5.12
	Torque test of rotor stop stud	25	--	3.3	4.5.6.12
	M433 S&A Assembly (Loaded) (Dwg. 9260750)				
	Examination for Defects	25	--	3.3	4.4.2.2
	Non-Arming	25	--	3.6.4	4.5.14
	S&A Arming Time	25	--	3.7.2	4.5.10 & 4.5.13
	Rotor Housing Assembly (Dwg. 9260767)				
	Examination for Defects	10	--	3.3	4.4.2.3
	Load test of spring stud	10	--	3.3	4.5.6.10
	Housing, Rotor (Dwg. 9260768)				
	Examination for Defects	10	--	3.3	4.4.2.35

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:32:57
Check the source to verify that this is the current version before use.

TABLE III - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 8		DRAWING NUMBER
	Fuze, Rocket, M433, Less Booster and Booster Lead and Components.				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Spring, Detent (Dwg. 8883713)				
	Examination for defects	10	--	3.3	4.4.2.4
	Spring embrittlement	10	--	3.3.1	4.5.4
	Spring, Setback Weight (Dwg. 8883718)				
	Examination for defects	20	--	3.3	4.4.2.5
	Spring embrittlement	10	--	3.3.1	4.5.4
	Setback weight spring set	10	--	3.3.2	4.5.5
	Gear and Pinion Assembly No. 1 (Dwg. 8883703)				
	Examination for defects	25		3.3	4.4.2.6
	Load Test of No. 1 gear and pinion assembly	25		3.3	4.5.6.1
	Gear and Pinion Assembly No. 2 (Dwg. 8883700)				
	Examination for defects	25		3.3	4.4.2.7
	Load test of No. 2 gear and pinion assembly	25		3.3	4.5.6.2
	Excapement Gear and Pinion Assembly (Dwg. 8883710)				

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:43:28Z
Check the source to verify that this is the current version before use.

TABLE III- FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 3 OF 8		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
	Fuze, Rocket, M433, Less Booster and Booster Lead and Components				
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Examination for defects	25		3.3	4.4.2.8
	Load test of escapement gear and pinion assembly	25		3.3	4.5.6.3
	Lever Assembly (Dwg. 8883706)				
	Examination for defects	30		3.3	4.4.2.9
	Load Test of lever shaft	10		3.3	4.5.6.4
	Load test of lever pallet	10		3.3	4.5.6.5
	Torque test of lever shaft	10		3.3	4.5.6.8
	Rotor Assembly (Dwg. 8883744)				
	Examination for defects	20		3.3	4.4.2.10
	Load test of annular gear	10		3.3	4.5.6.6
	Load test of lock roller pin	10		3.3	4.5.6.7
	Inner Plate Assembly (Dwg. 8883693)				
	Examination for defects	20		3.3	4.4.2.11
	Load test of bridge rivet	20		3.3	4.5.6.9
	Escapement and Gear Assembly (Dwg. 9260774)				
	Examination for defects	20		3.3	4.4.2.12
	Load test of pillars	20		3.3	4.5.6.11

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:32:27Z
Check the source to verify that this is the current version before use.

TABLE III - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH CATEGORY	TITLE / EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	DRAWING NUMBER / NEXT HIGHER ASSEMBLY / PARAGRAPH REFERENCE /INSPECTION METHOD
	Fuze, Rocket, M433, Less Booster and Booster Lead and Components		SHEET 4 OF 8		
	Strap, Rotor Ground (Dwg. 9260772) Examination for defects	20		3.3	4.4.2.13
	Contact Female (Dwg. 9260762) Examination for defects	20		3.3	4.4.2.14
	Speed Clip (Dwg. 9260891) Examination for defects	20		3.3	4.4.2.15
	Housing, Booster (Dwg. 8883682) Examination for defects	25		3.3	4.4.2.16
	Stud, Spring (Dwg. 8883721) Examination for defects	10		3.3	4.4.2.17
	Contact Female #3 (Dwg. 9260759) Examination for defects	20		3.3	4.4.2.36

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:43:25Z
Check the source to verify that this is the current version before use.

TABLE III FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 5 OF 8		DRAWING NUMBER / NEXT HIGHER ASSEMBLY
	Fuze, Rocket, M433, Less Booster and Booster Lead and Components				
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Electronic Assembly (Dwg. 9260685)				
	Examination for Defects	25		3.3	4.4.2.18
	Pin Interfacing (Dwg. 9260697)				
	Examination for Defects	10 (a)		3.3	4.4.2.19
	Impact Sensor Probe (Dwg. 9260736)				
	Examination for Defects	25		3.3	4.4.2.20
	Molded Electronics Assembly (Mold) (Dwg. 9260878)				
	Examination for Defects	25		3.3	4.4.2.21
	Setback Weight Assembly (Dwg. 9260752)				
	Examination for Defects	25		3.3	4.4.2.22
	Pull off Test of Switch Pin	25		3.6.1.2	4.5.34
	Pull off Test of Insulator	25		3.6.1.1	4.5.33
	Case Assembly (Dwg. 9260756)				
	Examination for Defects	25		3.3	4.2.2.23

NOTES: (a) Quantity of 10 for each type required

Source: https://assist.dla.mil -- Downloaded: 2026-[illegible] Check the source to verify that this is the current version before use.

TABLE III. FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 6 OF 8	DRAWING NUMBER
	Fuze, Rocket, M433, Less Booster and Booster Lead and Components		NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Top Plate Assembly (Dwg. 9260760)				
	Examination for Defects	25		3.3	4.4.2.25
	Pin Retention of .025 in. dia. pin test	25		3.3.5.1	4.5.27
	Socket, Detonator (Dwg. 9260773)				
	Examination for Defects	25		3.3	4.4.2.26
	Contact (Dwg. 9260875)				
	Examination for Defects	25		3.3	4.4.2.27
	Electronics Assembly (Module) (Dwg. 9260887)				
	Examination for Defects	25		3.3	4.4.2.28
	Thermal shock	72		3.8.4.1	4.5.30 B
	Module Turn on Time	702		3.4.2	4.5.31
	Module Time Delay Function	702		3.4.1	4.5.35
	Fuze Protector (Dwg. 9260879)				
	Examination for Defects	25		3.3	4.4.2.29

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

TABLE III FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 7 OF 8	DRAWING NUMBER
	Fuze, Rocket, M433, Less Booster and Booster Lead and Components		NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Body (Dwg. 9260883)				
	Examination for Defects	25		3.3	4.4.2.30
	Connector (Dwg. 9260885)				
	Examination for Defects	25		3.3	4.4.2.31
	"O" Ring (Dwg. MS 28775)				
	Examination for Defects	25		3.3	4.4.2.32
	Fuze, Rocket, M433 Less Booster and Booster Lead (Dwg. 9260886)				
	Examination for Defects	228		3.3	4.4.2.33
	S&A Position Check	228		3.7.3	4.5.15
	Jolt - MIL-STD-331, Test 101	12		3.8.5.3	4.5.19
	Jumble - MIL-STD-331, Test 102			3.8.5.3	4.5.19
	Five Foot Drop - MIL-STD-331, Test III	25		3.9	4.5.20
	Aircraft Vibration - Helicopter See Appendix A	63		3.9	4.5.22
	Non-environmental test	67		3.9	4.5.21
	Non-arm	32		3.8.5.1	4.5.17
	Arming time (under minimum)	32		3.8.1	4.5.23/4.5.16
	Forty Foot Drop	10		3.8.5.4	4.5.18
	Arming time (over max. or fail to arm)	32		3.8.1	4.5.23/4.5.16

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

TABLE III FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-632811(AR)

PARAGRAPH	TITLE		SHEET 8 OF 8		DRAWING NUMBER
	Fuze, Rocket, M433, Less Booster and Booster Lead And Components				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Leak Test	176		3.814.1	4.5.7
	Temperature and Humidity Test	21		3.8.4.1	4.5.29
	Ballistic Firing Test	144		3.11	4.5.36
	Thermal Shock	30		3.8.4.1	4.5.30 A
	Charge CircuitContinuity	228		3.8.2	4.4.2.33
	Fuze Body Assembly (Dwg. 9260888)				
	Examination for Defects	25		3.3	4.4.2.34
	Corrosion resistance of Protective Coating	25		3.3	4.5.8
	Umbilical Assembly Pull Test	22	.61	3.3.6.1	4.5.28
	Electronic Assembly (Dwg. 9260685)				
	Examination for Defects	25		3.3	4.4.2.18
	Module Time Delays	25		3.4.1	4.5.35
	Module Turn on Time	25		3.4.2	4.5.31
	Case (Dwg. 9260758)				
	Examination for Defects	25		3.3	4.4.2.24

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 04:32:27
Check the source to verify that this is the current version before use.

4.4 Quality Conformance Inspection

4.4.1 Inspection Lot Formation. - Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, each inspection lot of loaded fuzes may contain:

a. Detonators from as many as three detonator lots.

b. Metal parts form one lot number.

c. Safety and Arming devices form not more than two lots.

4.4.2 Examination. - See MIL-A-48078 - and Table VII.

a. Sampling Plans. - Unless otherwise specified in the Classification of Defects and Test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Normal Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.1	Device, Safety and Arming w/o Case Assembly		9260751
			NEXT HIGHER ASSEMBLY
			9260750

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Setback weight return capability		100%	3.5.3	4.5.11
2	Rotor reset capability		100%	3.5.2	4.5.12
3	Distance between annular gear and no. 2 gear, max.		100%	3.3	Gage
Major					
101	Height from forward face of base to top of rotor, max.		0.40%	3.3	Gage
102	Distance from rotor flat to edge of base min.		0.40%	3.3	Gage
103	Detonator socket contact missing.		0.40%	3.3	Visual
104	Rotor ground strap missing.		0.40%	3.3	Visual
105	Rotor ground strap deformed.		0.40%	3.3	Visual
106	Rotor ground strap not making contact with detonator socket contact.		100%	3.3	Visual
107	Detonator perforated or damaged		0.40%	3.3	Visual
108	Foreign matter present		0.40%	3.3	Visual
109	Lubricant missing		0.40%	3.3	Visual
110	Diameter across posts of rotor housing min.		0.40%	3.3	Gage
111	Protective finish missing or incomplete		0.40%	3.3	Visual
112	Markings missing or incomplete		0.40%	3.3	Visual
113	Distance from detonator disc to bottom of S&A rotor housing (armed position)		0.40%	3.3	Gage
114	Load test of Detonator		0.40%	3.7.4	4.5.9
115	Arming Time		100%	3.7.2	4.5.13

NOTES: (a) Detonators are to be tested in accordance with para. 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:32 EST
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.4.2.1	Device, Safety and Arming w/o Case Assembly		9260751
			NEXT HIGHER ASSEMBLY 9260750

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
116	Alignment of detonator cavity with the outside diameter across the rotor housing posts.		0.40%	3.3	Gage
117	Torque test of rotor stop stud		0.40%	3.3	4.5.6.12
Minor 201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27T03:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.2	M433 S&A Assy (Loaded)	1 OF 1	9260750
			NEXT HIGHER ASSEMBLY 9260886

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Non-arming 12.0g± .5g minimum for a minimum of 5 seconds.	(a)	100%	3.6.4	4.5.14
Major					
101	Setback wt. actuator pin improperly positioned on common contact.		0.40%	3.3	Visual
102	Detonator speed clip tabs improperly crimped, broken or protruding above surface of rotor.		0.40%	3.3	Visual
103	Continuity through detonator.	(b)	100%	3.7.1	Ohmmeter with current limited to one milliampere
104	Overall length		0.40%	3.3	Gage
105	S&A improperly assembled and seated in switch case assembly.		0.40%	3.3	Visual
106	Detonator shorting switch not contacting detonator high terminal.		0.40%	3.3	Visual
Minor					
201	Marking missing or incomplete		0.65%	3.3	Visual
202	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

(a) This shall be last test prior to insertion S&A Assy into fuze body Assy. Dwg. 9260888.

(b) This test shall consist of arming S&A, measuring continuity, returning rotor to safe position.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Rotor Housing Assembly				9260767
					NEXT HIGHER ASSEMBLY 9260750
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Load test of spring stud		0.40%	3.3	4.5.6.10
Minor 201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Spring, Detent				8883713
					NEXT HIGHER ASSEMBLY
					9260774
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Spring embrittlement	10	(a)	3.3.1	4.5.4
Minor 201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

(a) If one or more springs are found defective, the spring lot shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Spring, Setback Weight				8883718
					NEXT HIGHER ASSEMBLY
					9260774
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Spring embrittlement	10	(a)	3.3.1	4.5.4
102	Setback weight spring set	10	(a)	3.3.2	4.5.5
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

(a) If one or more springs are found defective, the spring lot shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Gear and Pinion Assembly No. 1				8883703
					NEXT HIGHER ASSEMBLY
					9260774
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Load test of No. 1 gear and pinion assembly		100%	3.3	4.5.6.1
2	Maximum gap between gear and pinion		100%	3.3	Gage
Major	None defined				
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil — Downloaded: 2026-02-27 07:43:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.7	Gear and Pinion Assembly No. 2				8883700
					NEXT HIGHER ASSEMBLY
					9260774
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Load test of No. 2 gear and pinion assembly		100%	3.3	4.5.6.2
2	Maximum gap between gear and pinion		100%	3.3	Gage
Major	None defined				
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.8	Escapement Gear and Pinion Assembly				8883710
					NEXT HIGHER ASSEMBLY
					9260774
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Load test of escapement gear and pinion assembly		100%	3.3	4.5.6.3
2	Maximum gap between gear and pinion		100%	3.3	Gage
Major	None defined				
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:43:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Lever Assembly				8883706
					NEXT HIGHER ASSEMBLY
					9260774
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Load test of lever shaft		100%	3.3	4.5.6.4
2	Load test of lever pallet		100%	3.3	4.5.6.5
3	Maximum gap between lever and shaft		100%	3.3	Gage
Special					
A	Torque test of lever shaft (See Note)		0.040%	3.3	4.5.6.8
Major	None defined				
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual
	Note: The sampling plan for this test shall be in accordance with MIL-STD-105 using inspection Level II and an AQL of 0.040 percent. Continuous sampling may be using inspection Level II, CSP-I and an AQL of 0.015 per cent.				

NOTES:

Source: https://assist.dla.mil — Downloaded: 2026-02-27 03:26:27
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.10	Rotor Assembly				8883744
					NEXT HIGHER ASSEMBLY
					9260751
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical 1	Load test of annular gear		100%	3.3	4.5.6.6
Special A	Load test of lock roller pin (See Note)		0.040%	3.3	4.5.6.7
Major	None defined				
Minor 201	Evidence of poor workmanship		0.65%	3.14	Visual
	Note: The sampling plan for this test shall be in accordance with MIL-STD-105 using inspection Level II and AQL of 0.040 percent. Continuous sampling may be used in accordance with MIL-STD-1235 using inspection Level II, CSP-I and an AQL of 0.015 percent.				

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:32:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE EINPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.11	Inner Plate Assembly				8883693
					NEXT HIGHER ASSEMBLY
					9260751
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Special A	Load test of bridge rivet (See Note)		0.040%	3.3	4.5.6.9
Major	None defined				
Minor 201	Evidence of poor workmanship		0.65%	3.14	Visual
	Note: The sampling plan for this test shall be in accordance with MIL-STD-105 using inspection Level II and an AQL of 0.040 percent. Continuous sampling may be used in accordance with MIL-STD-1235 using inspection Level II, CSP-I and an AQL of 0.015 percent.				

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-28T04:28ZZ
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.12	Escapement and Gear Assembly				8883692
					NEXT HIGHER ASSEMBLY
					9260751
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Load test of pillars		0.40%	3.3	4.5.6.11
Minor 201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:32:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.13	Strap, Rotor Ground				9260772
					NEXT HIGHER ASSEMBLY
					9260769
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Width at detonator end		0.40%	3.3	Gage
103	Strap improperly bent		0.40%	3.3	Gage/Visual
102	Width of detonator groove		0.40%	3.3	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:32:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.14	Contact Female				9260762
					NEXT HIGHER ASSEMBLY
					9260760
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length of contact		0.40%	3.3	Gage
102	Major diameter (before forming)		0.40%	3.3	Gage
103	Slot width (before forming)		0.40%	3.3	Gage
104	Slot depth (before forming)		0.40%	3.3	Gage
105	Diameter of stop flange		0.40%	3.3	Gage
106	Diameter below flange		0.40%	3.3	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-28T03:28ZZ
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.15	Speed Clip				9260891
					NEXT HIGHER ASSEMBLY
					9260750
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length of clip		0.40%	3.3	Gage
102	Diameter of clip		0.40%	3.3	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-[illegible] Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.16	Housing, Booster				8883682
					NEXT HIGHER ASSEMBLY
					9260886
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of lead cavity		0.40%	3.3	Gage
102	Thickness at end of lead cavity		0.40%	3.3	Gage
103	Total length		0.40%	3.3	Gage
104	Location of counterbore from bottom of booster cavity		0.40%	3.3	Gage
105	Diameter of booster cavity		0.40%	3.3	Gage
106	Depth of lead cavity		0.40%	3.3	Gage
107	Height of lead		0.40%	3.3	Gage
108	Width of "O" ring groove		0.40%	3.3	Gage
109	Diameter of "O" ring groove		0.40%	3.3	Gage
110	Concentricity of thread pitch diameter with booster cavity		0.40%	3.3	Gage
111	Concentricity of lead cavity with booster cavity		0.40%	3.3	Gage
112	Major diameter of threads		0.40%	3.3	Gage
113	Concentricity of "O" ring groove with pitch diameter		0.40%	3.3	Gage
114	Finish of "O" ring groove		0.40%	3.3	Gage
115	Perpendicularity of bottom lead cavity with side wall of lead cavity		0.40%	3.3	Gage
116	Evidence of tooling indentations		0.40%	3.3	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 03:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.16	Housing, Booster				8883682
					NEXT HIGHER ASSEMBLY
					9260886
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Width across wrench flats		0.65%	3.3	Gage
202	Symmetry of wrench flats		0.65%	3.3	Gage
203	Inside diameter at crimp section		0.65%	3.3	Gage
204	Wall thickness at crimp section		0.65%	3.3	Gage
205	Protective finish missing or incomplete		0.65%	3.3	Gage
206	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:32 EST
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.17	Stud, Spring		8883721
			NEXT HIGHER ASSEMBLY 9260767

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Diameter of stud, min.		0.40%	3.3	Gage
Minor 201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil — Downloaded: 2026-02-27 03:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.18	Electronic Assembly	1 OF 1	9260685
			NEXT HIGHER ASSEMBLY 9260878

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Defective soldered connections		0.40%	3.3	Visual
102	Components improperly mounted on substrate		0.40%	3.3	Visual
103	Components missing from substrate		0.40%	3.3	Visual
104	Coating missing, incomplete or defective		0.40%	3.3	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

40

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.19	Pin Interfacing (Applicable Pins only)				9260697
					NEXT HIGHER ASSEMBLY
					9260685
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Longer Length after Bending		0.40%	3.3	Gage
102	Shorter Length after Bending		0.40%	3.3	Gage
103	Diameter of Wire		0.40%	3.3	Gage
104	Wire Tip Flat over Max.		0.40%	3.3	Gage
Minor					
201	Evidence of Poor Workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.20	Impact Sensor Probe				9260736
					NEXT HIGHER ASSEMBLY
					9260888
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	True position of point stem to outside diameter of waferr		0.40%	3.3	Gage
102	True position of contact stem to outside diameter of wafer		0.40%	3.3	Gage
103	Length of contact stem, min.		0.40%	3.3	Gage
104	Thickness of flexible recess section		0.40%	3.3	Gage
105	Outside diameter of wafer, max.		0.40%	3.3	Gage
106	Diameter of contact stem, max.		0.40%	3.3	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-07T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.21	Molded Electronics Assembly (Mold)		9260878
			NEXT HIGHER ASSEMBLY 9260887

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Length of three interface pins from mold at center line of pins		0.40%	3.3	Gage
102	True position of three pins to reference diameter A		0.40%	3.3	Gage
103	Mold inspection	5/ cavity		3.3,4.3.4	4.5.26
104	Outside diameter of mold, min.		0.40%	3.3	Gage
105	Length from center line of mold to connector interface surface, min.		0.40%	3.3	Gage
106	Chamfer at forward banking surface		0.40%	3.3	Gage/Visual
107	Overall length		0.40%	3.3	Gage
Minor					
201	Pins not clean of mold material or have improper spherical termination		0.65%	3.3	Visual
202	Mold cavity identification not permanent or illegible		0.65%	3.3	Visual
203	Length of capacitor shorting pins		0.65%	3.3	Gage
204	Mold is serialized improperly		0.65%	3.3	Visual
205	Molding defects		0.65%	3.14	Visual
206	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 03:28:27
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.22	Setback Weight Assembly		9260752
			NEXT HIGHER ASSEMBLY 9260751

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Switch pin insulator -- missing, scored, with voids or cracks.		0.40%	3.3	Visual
102	Pull-off test of Switch Pin	(a)	0.40%	3.6.1.2	4.5.3 4
103	Perpendicularity of Switch Pin		0.40%	3.3	Gage
104	Overall height of insulator above weight		0.40%	3.3	Gage
105	Pull-off test of insulator	(a)	0.40%	3.6.1.1	4.5.3 3
106	Shrinkage requirement - Dwg. Note #6		0.40%	3.3	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

(a) The Pull-off test of the insulator shall be performed before the Pull-off test of the Switch Pin. The same sample units shall be used for each test.

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:03:28Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.23	Case Assembly	1 OF 1	9260756
1			NEXT HIGHER ASSEMBLY 9260750

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	3 oz. minimum retention of .025 inch diam. pin test (det. connector)		0.40%	3.3	Gage
102	Symmetrical location of det. contact		0.40%	3.3	Gage
103	Insulation resistance between #1 & #5 contacts: *(safe)		100%	3.6.3	Milliohmmeter & Gage
104	Insulation resistance of #1 & #2 contacts. *(safe)		100%	3.6.3	Megohmmeter, test voltage 500 VDC.
105	Loose detonator contact		0.40%	3.3	Visual
106	Continuity through detonator		0.40%	3.7.1	Gage
107	Insulation resistance of #1 & #5 contacts.*(safe)		100%	3.6.3	Megohmmeter, test voltage 500VDC.
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES: *Cat. 103 to 107 is predicated on using a gage simulating a safe/armed S&A, incorporating these features:

1. A setback weight with a switch actuator pin. 2. A rotor with a detonator socket grounded by a strap.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.24	Case				9260758
					NEXT HIGHER ASSEMBLY
					9260756
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
Major					
101	True Position of det. female connector hole with diam "A"		0.40%	3.3	Gage
102	Rotor O.D. clearance radius		0.40%	3.3	Gage
103	Detonator socket clearance radius		0.40%	3.3	Gage
104	Lock roller clearance radius		0.40%	3.3	Gage
105	Depth of det. contact cavity		0.40%	3.3	Gage
106	Depth of setback weight actuator pin clearance		0.40%	3.3	Gage
107	Molded Case Inspection	5/ cavity		3.3,4.3.4	4.5.26
108	Radius of S&A housing retainer - 2 Places		0.40%	3.3	Gage
109	True position of guide boss - 2 Places		0.40%	3.3	Gage
Minor					
201	Evidence of poor molding/workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-[illegible] Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.25	Top Plate Assembly	1 OF 1	9260760
			NEXT HIGHER ASSEMBLY 9260756

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Pin retention of .025 inch diameter pin, test (5) receptacles		0.40%	3.3.5.1	4.5.27
102	Alignment of N.C. contact		0.40%	3.3	Visual
103	Alignment of common contact		0.40%	3.3	Visual
104	Alignment of N.O. contact		0.40%	3.3	Visual
105	Loose connectors		0.40%	3.3	Visual
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES: N.C. = Normally Closed
N.O. = Normally Open

Source: https://assist.dla.mil -- Downloaded: 2026-[illegible] Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.26	Socket, Detonator				9260773
					NEXT HIGHER ASSEMBLY
					9260769
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major 101	Detonator pin socket diameter		0.40%	3.3	Gage
Minor 201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.27	Contact				9260875
					NEXT HIGHER ASSEMBLY
					9260887
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Location of center of contact cup from capacitor C-4 shorting pin		0.40%	3.3	Gage
102	Location of center of contact cup from contact plate side		0.40%	3.3	Gage
103	Inside depth of contact cup		0.40%	3.3	Gage
104	Distance of wire slot to center of contact cup		0.40%	3.3	Gage
105	Flatness of contact plate		0.40%	3.3	Gage
106	Inside diameter of contact cup		0.40%	3.3	Gage
Minor					
201	Clearance cut out radius		0.65%	3.3	Visual
202	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 03:26Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.28	Electronics Module Assembly (Module)	1 OF 1	9260887
			NEXT HIGHER ASSEMBLY 9260886

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	True position of contact cup to diameter "A"		0.40%	3.3	Gage
102	Function time delay: 20MS		100%	3.4.1	4.5.35
103	Function time delay: 200 MS		100%	3.4.1	4.5.35
104	Function time Delay: 600MS		100%	3.4.1	4.5.35
105	Module turn on time		0.40%	3.4.2	4.5.31
106	Height of soldered pin from contact forward surface, max.		0.40%	3.3	Gage
107	Improper soldering		0.40%	3.3	Visual
108	Thermal Shock	30	" "	3.8.4.1	4.5.30.B
Minor					
201	Improper bonding of contact		0.65%	3.3	Visual
202	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F- 63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9260879
4.4.2.29	Fuze Protector				NEXT HIGHER ASSEMBLY 9260886
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Inside diameter (fuze body)		0.40%	3.3	Gage
102	Thickness at 45° angle		0.40%	3.3	Gage
103	Parallelism of sides at 45° angle		0.40%	3.3	Gage
104	Mold inspection	5/ cavity		3.3,4.3.4	4.5.26
105	Full radius of nose		0.40%	3.3	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 07:32:57
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.30	Body				9260883
					NEXT HIGHER ASSEMBLY
					9260888
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	True position of pitch diam. of warhead mounting threads to body inside diameter.		0.40%	3.3	Gage
102	Pitch diameter of warhead mtg. thread		0.40%	3.3	Gage
103	Inside diameter of body cavity		0.40%	3.3	Gage
104	True position of booster o-ring seat diameter to inside diameter of body		0.40%	3.3	Gage
105	Diameter of booster o-ring seat.		0.40%	3.3	Gage
106	True position of pitch diameter of booster cavity thread to inside diameter of body cavity		0.40%	3.3	Gage
107	Pitch diameter of booster cavity thread		0.40%	3.3	Gage
108	True position of small diameter umbilical hole to inside diameter of body		0.40%	3.3	Gage
109	True position of large diameter umbilical hole to inside diameter of body		0.40%	3.3	Gage
110	Perpendicularity of bottom of body cavity to inside diameter of body		0.40%	3.3	Gage
111	Perpendicularity of bottom of probe flange cavity to inside diameter of body		0.40%	3.3	Gage
112	Length of minor umbilical cavity diameter		0.40%	3.3	Gage
113	Depth of body cavity		0.40%	3.3	Gage
114	Length between body cavity bottom and bottom of probe flange cavity		0.40%	3.3	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.4.2.30	Body		9260883
			NEXT HIGHER ASSEMBLY
			9260888

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
115	True position of probe actuating stem cavity diameter to inside diameter of body		0.40%	3.3	Gage
116	Surface finish for o-ring		0.40%	3.3	Gage
117	Diameter of probe actuating stem		0.40%	3.3	Gage
118	Inside probe sensor chamfer		0.40%	3.3	Gage
119	Outside probe sensor chamfer		0.40%	3.3	Gage
120	Depth of probe flange cavity		0.40%	3.3	Gage
121	Bore diameter of probe flange cavity		0.40%	3.3	Gage
122	Small outside diameter		0.40%	3.3	Gage
123	Length from aft end to warhead interface shoulder		0.40%	3.3	Gage
124	Length from warhead interface shoulder to automated service groove.		0.40%	3.3	Gage
125	Outside diameter of nose		0.40%	3.3	Gage
126	Inside diameter of crimp seal cavity		0.40%	3.3	Gage
127	Large diameter of umbilical hole		0.40%	3.3	Gage
128	Depth of probe flange cavity from nose of body		0.40%	3.3	Gage
Minor					
201	Distance between wrench slots, max.		0.65%	3.3	Gage
202	Major diameter of warhead mounting thread		0.65%	3.3	Gage
203	Improper finish		0.65%	3.3	Visual
204	Width of wrench slots, Min.		0.65%	3.3	Gage
205	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.31	Connector		9260885
			NEXT HIGHER ASSEMBLY
			9260886

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	True position of pin with ref's A & B, two pins		0.40%	3.3	Gage
102	True position of ground receptacle with ref's A & B		0.40%	3.3	Gage
103	Molded connector inspection	5/ cavity		3.3,4.3.4	4.5.26
104	Overall length		0.40%	3.3	Gage
105	Chamfer at forward banking surface		0.40%	3.3	Visual
106	Interface length of 2 pins		0.40%	3.3	Gage
107	Depth of forward end of ground receptacle		0.40%	3.3	Gage
108	Depth of aft end of ground receptacle		0.40%	3.3	Gage
109	Diameter of S&A interface pin, 2 pins		0.40%	3.3	Gage
110	Diameter of umbilical conn. pin		0.40%	3.3	Gage
111	Diameter of ground receptacle		0.40%	3.3	Gage
112	Thickness of mold		0.40%	3.3	Gage
Minor					
201	Umbilical hole chamfer		0.65%	3.3	Visual
202	Interface pins bent or damaged		0.65%	3.3	Visual
203	Evidence of poor molding/workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-27 13:26:27
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.32	"O" Ring	1 OF 1	MS 28775-120
			NEXT HIGHER ASSEMBLY: 9254707

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Outside diameter		0.40%	3.3	Gage
102	Inside diameter		0.40%	3.3	Gage
103	Uniform wall thickness		0.40%	3.3	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.33	Fuze, Rocket, M433 Less Booster and Booster Lead	1 OF 1	9260886
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	S&A position check		100%	3.7.3	4.5.15
2	Jolt - MIL-STD-331, Test 101	12		3.8.5.3	4.5.19
3.	Jumble - MIL-STD-331, Test 102			3.8.5.3	4.5.19
4	Five Foot Drop - MIL-STD-331, Test III	15		3.9	4.5.20
5.	Helicopter Vibration See Appendix A	54		3.9	4.5.22
6	Non-environmental test	38		3.9	4.5.21
7	Non-arm	32a		3.8.5.1	4.5.17
8	Arming time (under minimum)	32a		3.8.1	4.5.23/4.5.16
9	Forty-Foot Drop	10b		3.8.5.4	4.5.18
Special					
a	Booster housing improperly torqued		0.40%	3.3	Gage
Major					
101	Length from aft face to end of booster housing max.		0.40%	3.3	Gage
102	Arming time (over max or fail to arm)	32	a	3.8.1	4.5.23/4.5.16
103	Leak test	92	a	3.8.4.1	4.5.7/4.5.22
104	Temperature and Humidity Test	21	b	3.8.4.1	4.5.29
105	Ballistic Fuze firing test	60		3.11	4.5.36
106	Charge circuit continuity		100%	3.8.2	Gage
Minor					
201	Stamping missing		0.65%	3.3	Visual
202	Poor workmanship		0.65%	3.14	Visual

NOTES: a. Samples taken from Aircraft vibration, & Non-environmental: Note 5' Drop not done on every lot.
b. First Article only

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T18:38Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.34	Fuze Body Assembly		9260888
			NEXT HIGHER ASSEMBLY 9260886

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Umbilical Assembly pull test		0.40%	3.3.6.1	4.5.28
102	Location of contact stem to int. diam. of fuze body		0.40%	3.3	Gage
103	Stake of umbilical - 3 places		0.40%	3.3	Visual
104	Maximum depth of intrusion of probe stem into fuze body		0.40%	3.3	Gage
105	Umbilical - Insulation Resistance		0.40%	3.3.6.2	Megohmmeter @ 500VDC
106	Umbilical electrical continuity		0.40%	3.3.6.2	Milliohmmeter
107	Loose or improperly secured probe		0.40%	3.3	Visual
108	Umbilical-outer insulation free from damage or separation exposing braid.		0.40%	3.3	Visual
Minor					
201	Umbilical adhesive missing or improperly applied		0.65%	3.3	Visual
202	Impact probe sealant missing or improperly applied		0.65%	3.3	Visual
203	Corrosion resistance of protective finish	25	a.	3.3	4.5.8
204	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

a. If one or more samples are found defective the lot shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T03:28Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63281 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.35	Rotor Housing				9260768
					NEXT HIGHER ASSEMBLY
					9260767
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of base		0.40%	3.3	Gage
102	Rotor housing post separation		0.40%	3.3	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.36	Contact Female #3				9260759
					NEXT HIGHER ASSEMBLY
					9260756
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length of contact		0.40%	3.3	Gage
102	Major diameter (before forming)		0.40%	3.3	Gage
103	Slot width (before forming)		0.40%	3.3	Gage
104	Slot depth (before forming)		0.40%	3.3	Gage
105	Diameter of stop flange		0.40%	3.3	Gage
106	Diameter below flange		0.40%	3.3	Gage
Minor					
201	Evidence of poor workmanship		0.65%	3.14	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2016-12-26T04:32Z
Check the source to verify that this is the current version before use.

THIS IS A BLANK PAGE

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:52Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. - Testing is described in the First Article and Quality Conformance Inspection Tables.

4.4.4 Inspection Equipment. - The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See section 6 of MIL-A-48078 and section 6.4 herein.

4.4.4.1 Contractor Inspection System. - As part of contractor's approved quality procedure, there shall be a provision for checking the adequacy of inspections made in connection with listed critical or major defects. There procedures shall include the following provisions:

4.4.4.1.1 Handling Procedure. - A Design Agency approved procedure shall be instituted that shall preclude unauthorized handling of the S&A's and fuzes from the S&A position check until the booster housing has been installed. The procedure shall be fail safe to eliminate armed fuzes from being introduced into the lot. Fail safe is defined as follows: Any equipment failure shall operate to cause rejection of the part or otherwise prevent its subsequent use.

4.4.4.1.2 Identification of Rejected Material. - All material listed below, rejected as containing defects, shall be isolated to preclude its inclusion with acceptable material:

a. All S&A's failing paragraphs 4.5.10, 4.5.11, 4.5.12, 4.5.13, or 4.5.14.

b. All modules failing paragraphs 4.5.30, 4.5.31, 4.5.35.

c. All fuzes failing paragraphs 4.5.7, 4.5.15, 4.5.18, 4.5.19, 4.5.20, 4.5.22 and 4.5.23.

4.4.4.2 Use of Simulated Defect Standards. - The following listed verified inspections shall be validated and inspection equipment verified once per shift using Design Agency approved item facsimilies or standards containing the defects and supplied by the contractor. The contractor shall resupply the item facsimilies when it is determined by the Government that the facsimilies are no longer representative enough of the product to make it unidentifiable to the contractor inspection personnel, or it is not functioning in the necessary manner and cannot be

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

corrected satisfactorily. These standards should be inert and readily identifiable to the Government to ensure recovery should they be inadvertently introduced into production. Simulated defect standards used to verify the following verified inspections should be constructed and identified in such a manner that they are not readily recognizable to the contractor inspection personnel as defect standards. Standards should be used so that their number, time and sequence of introduction into the inspection cycle is known only to those personnel responsible for checking the accuracy of the operation. Adequacy of the standards shall be verified at least once each week.

Verified Inspection

Paragraph 4.5.11 - Setback weight return capability.
Paragraph 4.5.15 - S&A position check.
Paragraph 4.5.31 - Module Turn on Time
Paragraph 4.5.35 - Module Time Delay Function Test

NOTE: When there is automatic detection and automatic rejection of defective items to a controlled area or a controlled rejection of defective items, it is permissible for the defect standards to be identifiable and their introduction into production noticeable to contractor inspection personnel.

4.4.4.3 Undetected Defect Standards. - Provisions shall be established for the corrective action to be taken where the equipment or contractor inspection personnel fail to identify a standard as defective. These provisions shall include a reinspection of all acceptable material subsequent to the last acceptable verification check as a minimum.

4.5 Methods of Inspection

PRECAUTION: This specification covers sampling and testing of chemical, toxic or explosive materials which are potentially hazardous to personnel. Accordingly, it is emphasized that all applicable safety rules, regulations and procedures must be followed in handling and processing these materials.

4.5.1 Materials, Components and Processes. - Compliance with all requirements of Section 3 of this specification shall be ascertained by current and continuing examination of inspection and test data to determine that all components (parts, subassemblies, and materials) have been inspected and tested and found to comply with their respective drawing and

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

specification requirements, and that all specified manufacturing processes have been followed.

4.5.1.1 Visual and Mechanical Inspection.- The visual, manual and mechanical inspections and tests shall verify compliance with the requirements of Sections 3 and 5 of this specification in accordance with 4.4.2 herein and Table III.

4.5.2 Check Test for Deterioration of Detonators. - If the total time between original acceptance of any detonator lot and the assembly of that lot into the fuzes exceeds two years, at any time since previous tests, the detonator lot shall be subjected to and must satisfactorily pass the functioning and output tests specified in MIL-D-45495 immediately before the detonator lot is assembled into the fuzes. The test shall be performed by the contractor on detonators randomly selected by a Government Inspector. The test shall be conducted at Government expense without cost to the contractor who loaded the detonators or the contractor who is to assemble the detonators into the fuzes. The test shall not constitute a basis for fuze lot rejection against either contractor except where deterioration has occurred as a direct result of carelessness in handling, storage, etc., permitted while the detonator lot was under the jurisdiction of either contractor.

4.5.4 Spring Embrittlement. - The spring shall be stretched along its longitudinal axis in the case of a coil spring, or bent in the case of a flat spring until the spring no longer returns to its original position. When the spring no longer returns to its original length or profile, it shall be considered distorted permanently. Any spring that breaks prior to this point shall be classed defective.

4.5.5 Setback Weight Spring Set. - The spring shall be measured at their original free length, assembled in a restraining fixture in accordance with 4.4.4 and compressed to a normal height of .750 inches, placed in an oven and subjected to a temperature of not more than 180 degrees Fahrenheit (F^{O}) or less than 175°F for 24 hours. The springs shall be removed from the oven and be cooled to ambient temperature. After cooling the springs for 24 hours minimum, the springs shall be measured and the measurement shall be compared to the original free length to ascertain compliance with the specified requirement. Any spring that fails the requirement shall be classed defective.

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T07:43:26Z
Check the source to verify that this is the current version before use.

4.5.6 S&A Mechanical Tests

4.5.6.1 Load Test of No. 1 Gear and Pinion Assembly. - Apply an axial load perpendicular to the No. 1 gear and in such a direction as to test the assembly of the No. 1 gear and pinion. The required force, the maximum permissible gap shall be inspected for compliance with the drawing requirement. Any No. 1 gear and pinion assembly that fails the requirement shall be classed defective.

4.5.6.2 Load Test of No. 2 Gear and Pinion Assembly. - Apply an axial load perpendicular to the No. 2 gear and in such a direction as to test the assembly of the No. 2 gear and pinion. The required force shall act against the No. 2 gear. Upon removal of the required force, the maximum permissible gap shall be inspected for compliance with the drawing requirement. Any No. 2 gear and pinion assembly that fails the requirement shall be classed defective.

4.5.6.3 Load Test of Escapement Gear and Pinion Assembly. - Apply an axial load perpendicular to the escapement gear and in such a direction as to test the assembly of the escapement gear and pinion. The required force, the maximum permissible gap shall be inspected for compliance with the drawing requirement. Any escapement gear and pinion assembly that fails the requirement shall be classed defective.

4.5.6.4 Load Test of Lever Shaft. - Apply the axial load perpendicular to the lever and in such a direction as to test the assembly of the lever and shaft. The required force shall act against the lever. Upon removal of the required force, the maximum permissible gap shall be inspected for compliance with the drawing requirement. Any lever shaft that fails the requirement shall be classed defective.

4.5.6.5 Load Test of Lever Pallet. - Apply an axial load perpendicular to the lever and in such a direction as to test the assembly of the lever and the lever pallet. The required force shall act against the lever. Upon removal of the required force, the height of the lever pallet above the lever shall be inspected for compliance with the drawing requirement. Any lever pallet that fails the requirement shall be classed defective.

4.5.6.6 Load Test of Annular Gear. - Apply a load perpendicular to the rotor and in such a direction as to test the assembly of the annular gear studs to the annular gear and the rotor. The required force shall act against the rotor. Upon removal of the required force, the distance

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

from the face of the rotor to the outside face of the annular gear shall be inspected for compliance with the drawing requirement. Any annular gear that fails the requirement shall be classed defective.

4.5.6.7 Load Test of Lock Roller Pin. - Apply an axial load perpendicular to the rotor and in such a direction as to test the strength of the assembly of the lock roller pin to the rotor. The required force shall act against the rotor. Any lock roller pin that fails the requirement shall be classed defective.

4.5.6.8 Torque Test of Lever Shaft. - A torque shall be applied between the lever and the lever shaft. Any lever shaft that fails the requirement shall be classed defective.

4.5.6.9 Load Test of Bridge Rivet. - Apply the required load perpendicular to the inner plate and into the bridge rivet from the side opposite the bridge. The required force shall act against the inner plate. Any bridge rivet that fails the requirement shall be classed defective.

4.5.6.10 Load Test of Spring Stud. - Apply an axial load perpendicular to the rotor housing and in such a direction as to test the assembly of the spring stud and the rotor housing. The required force shall act against the rotor housing. Any spring stud that fails the requirement shall be classed defective.

4.5.6.11 Load Test of Pillars. - Apply the required axial load perpendicular to the inner plate and in such a direction as to test the assembly of the pillars to the inner plate and outer plate. The required force shall act against the inner plate. Any pillars that fail the requirement shall be classed defective.

4.5.6.12 Torque Test of Rotor Stop Stud (Eccentric Pin). - The required torque shall be applied between the rotor stop stud and gear assembly. The required force shall act on the gear assembly. Any rotor stop stud that fails the requirement shall be classed defective.

4.5.7 Fuze Body Assembly Seal Leakage. - The fuze body assembly shall be checked for leakage past the seal ring and umbilical seal into the body assembly. The fuze body assembly shall be secured into the test fixture and 15.0 psig plus or minus 0.50 psig applied to the exterior of the assembly. A leakage rate greater than 1×10^{-3} STD cc/sec when subjected to

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

leak detection test 118 of MIL-STD-331, procedure 6.9 or an equivalent procedure having a minimum sensitivity of $1x10^{-3}$ STD cc/sec. A leak into the body assembly in excess of $1x10^{-3}$ STD cc/sec shall indicate excessive leakage and reject the fuze. The test equipment calibration and equipment sensitivity shall be in accordance with 4.4.4.

4.5.8 Corrosion Resistance of Protective Finish. - The testing of the sample shall be in accordance with MIL-STD-331, Test 107. The significant area for examination shall be the outside surface of the specimens.

The specimens shall show no more than five (5) rust spots or pits, none larger than 1/32 inch in diameter, except in those areas within 1/16 inch from the edges, corner, identification markings and holding during processing. Any sample that fails the requirement shall be classed defective.

4.5.9 Load Test of Detonator. - Apply the required axial load perpendicular to the rotor and in such a direction as to test the strength of the speed clip holding the detonator in the rotor. Any speed clip that fails the requirement shall be classed defective and the S&A removed form the lot.

WARNING: This test may be dangerous and should be performed behind a suitable barricade.

4.5.10 M433 S&A Arming Tests Ambient and Hot. - The S&A in the safe position shall be assembled to the test equipment in accordance with 4.4.4. The equipment shall accelerate the Safety and Arming Device to 40g's $\pm$ 0.5g's in a direction which simulates rocket launch. The arming time shall be recorded to the nearest hundreth of a second using a calibrated timer. At the completion of acceleration, the equipment shall be halted and visual observation shall be made for the locking position of the detent; to ascertain positive arming. At the completion of the test, the Safety and Arming Device shall be returned to the safe position. Any S&A that fails the requirement shall be classed defective.

WARNING: This test may be dangerous, and should be performed behind a suitable barricade.

4.5.11 Setback Weight Return Capability. - The S&A in the safe position shall be assembled to the test equipment in accordance with 4.4.4. The S&A shall be securely held in place during a 20 pound load test with a hold down force. The 20 pound load shall be applied at an average rate of 300 $\pm$ 50 inches per minute to the setback weight. It is mandatory that

Source: https://assist.dla.mil Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

the setback weight maintain contact with the 20 pound load applicator until the fully bottomed. The 20 pound force shall then be removed. S&A's failing to completely return to the fully safe position shall be classed defective and removed from the lot. Defect standards for verification of the inspection process shall be in accordance with 4.4.4.2 and 4.4.4.3. Defect standards for use with automatic equipment shall be as follows:

a. Units with setback weights which bind when depressed and remain in the depressed condition.

b. Units with setback weights which start to return but do not completely return to the original locking position.

c. Units with setback weights which return from the depressed condition at a slower than the normal rate causing rejection.

4.5.12 Rotor Reset Capability. - The loaded S&A shall be assembled to the test fixture in accordance with 4.4.4. The rotor shall be rotated to a postion at least 26 degrees, but not more than 35 degrees from the fully safe position and released. Observation shall be made for rotor return to the fully safe position. S&A's failing to comply with the specified requirement shall be classed defective and removed form the lot.

4.5.13 M433 S&A Arming Time Test - Cold. - The test equipment shall be in accordance with 4.4.4. The equipment shall accelerate the loaded Safety and Arming Device in a clockwise direction to 27.00g's plus or minus 0.5g's and the arming time shall be recorded to the nearest hundreth of a second using a calibrated timer. S&A's failing to comply with the specified requirements shall be classed defective and removed from the lot.

4.5.14 M433 S&A Non-Arming Test. - The test equipment shall be in accordance with 4.4.4. The equipment shall accelerate the loaded Safety and Arming Device in a clockwise direction to 12.00g's minimum for a minimum of five (5) seconds. Observation shall be made for rotor in the safe position. S&A's failing to comply with the specified requirement shall be classed defective and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-02-27T04:32:27Z
Check the source to verify that this is the current version before use.

4.5.15 S&A Position Check. - The S&A position, before insertion into the fuze body just prior to assembly of the booster housing, shall be inspected. Any armed S&A shall be considered defective and removed from the lot, and the assembly operation shall be halted until operation is corrected to Government satisfaction. The inspection shall be performed to the requirements of 3.7.4 using procedures in accordance with 4.4.4.2 and 4.4.4.3 and equipment in accordance with paragraph 4.4.4.

Defect standards with semi-armed and fully armed conditions shall be introduced at various times to verify test performance. The Design Agency approved handling procedure to preclude untested S&A's from being introduced into the fuze prior to the booster housing being installed shall also be assessed when the standards are introduced. If an improper procedure is being used as determined by the Government, all fuzes accepted subsequent to the last acceptable handling procedure assessment shall be screened as determined by the government.

4.5.16 M433 Fuze Assembly Arming Time Test. - The test equipment in accordance with 4.4.4. The equipment shall accelerate the loaded fuze in a clockwise direction to 40.00g's plus or minus 0.5g's except for cold temperature which shall be done at 27g's plus or minus 0.5g's and the arming time shall be recorded to the nearest hundredth of a second using a swing fixture and acoustic pick-up feeding the arming cycle noise signal to a design agency approved recorder. Any fuze assembly that fails the requirements of the arming time test shall be classed defective.

4.5.17 M433 Fuze Assembly Non-Arming Test. - The test equipment shall be in accordance with 4.4.4. The equipment shall accelerate the loaded fuze assembly in a clockwise direction to 12.00g's plus or minus 0.5g's for a minimum of three (3) seconds. An examination shall be made for rotor in the safe position. Any fuze assembly that fails the requirements of the non-arming time test shall be classed defective.

4.5.18 Forty Foot Drop. - The fuze assembly with warhead and motor shall be subjected to the Forty Foot Drop Test as specified in MIL-STD-331 with the exception that the round shall be dropped base down only. The complete pack is as specified on dwg. 8886810 and 8886811 shall be used. Any fuze assembly that fails the requirement shall be classed defective.

4.5.19 Jolt and Jumble. - The fuze assembly shall be subjected to the Jolt Test specified in Standard MIL-STD-331 with the exception that the fuze shall not be disassembled

Source: https://assist.dla.mil Downloaded: 2026-12-26T04:32:57Z
Check the source to verify that this is the current version before use.

and inspected after the Jolt Test. After completion of the Jolt Test, the same fuze shall be subjected to and withstand the Jumble Test specified in MIL-STD-331. Any fuze assembly that fails the requirements shall be cause for lot rejection.

4.5.20 Five Foot Drop Test. - A random sample of fifteen (15) fuzes (with fuze protector) shall be selected and subjected to the test as specifiec in MIL-STD-331 with the following conditions:

a. The fuze assembly will be assembled to a M230 Warhead (the Government shall supply the warhead for the contractor's use) and with impact orientation of the warhead-fuze assemblies for the drop test as follows:

(1) Major axis horizontal
(2) Major axis 45° from vertical base down
(3) Base down

Five (5) fuzes each must be dropped in the above (1, 2, 3) orientations. No fuze shall be subjected to more than one drop. The orientation of the Safety and Arming Device (specifically the g-weight) of the fuze shall be random.

b. The Five Foot Drop Test, as specified in MIL-STD-331, shall be performed until three (3) consecutive lots (a minimum lot size of one week's production) have complied with the acceptance criteria specified. After satisfying the above requirement, one lot (a minimum lot size of one week's production) per month shall be selected by the Government and subjected to and pass the Five Foot Drop Test. Should the one lot (per month) fail the acceptance criteria, the contractor shall be required to return to the three (3) consecutive lot procedures above for process qualification.

c. The fuzes shall be subjected to the tests and acceptance or rejection criteria as specified in Table IV.

TABLE IV

SAMPLE SIZE - 15

TEST	ACCEPT	REJECT	TEST METHOD PARAGRAPH
Non-Arm	0	1	4.5.23 and 4.5.24
Arming Time			4.5.21 and 4.5.22
Arming Time			
Safety Failure	0	1	
Under Min.	1	2	
Over Max.	0	1	
Fail to Arm	0	1	
Firing	0	1	4.5.20

Source: https://assist.dla.mil - Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

If the sample fails the above acceptance criteria, the lot shall be rejected.

d. Centrifuge Charge Arm Function - All fuzes subjected to test shall be centrifuge fired. The module shall be charged for the nominal 600MS time before arming. After arming the sensor probe shall be activated and the fuze fired.

4.5.21 Non-Environmental Test. - A random sample of eight (8) fuzes shall be selected and subjected to the test and acceptance or rejection criteria as specified in 4.5.23.

4.5.22 Vibration Test. - Fuzes shall be subjected to Helicopter Vibration as specified in Appendix. A. Vibration conditioning at resonance is not required. After vibration, the fuzes shall be subjected to the Seal Leakage Test, 4.5.7 and the lot shall be rejected if four (4) or more defects occur. Following seal leakage testing, the fuzes shall be subjected to the tests and acceptance or rejection criteria specified in 4.5.23. Note: The fuzes shall be subjected to and must pass the continuity test prior to the vibration test. If one or more continuity failures occur in the test sample the lot shall be rejected.

4.5.23 Acceptance Criteria. - The sample fuzes from the Non-environmental (8) and Vibration (24) tests shall be combined into one sample and subjected to the following tests specified in Table V.

TABLE V

SAMPLE SIZE - 32

TEST	ACCEPT	REJECT	TEST METHOD PARAGRAPH
Non-arm	0	1	4.5.17
Arming Time Safety Failure	0	1	4.5.24
Arming Time under min.	1	2	4.5.24
Arming Time over max.	0	1	4.5.24
Fail to arm	0	1	4.5.24

If all tests are acceptable, the sample fuzes from the Non-environmental test may be returned to the lot after disassembly, resetting the S&A into the safe position and reassembly.

4.5.24 Fuze Arming and Non-Arming Definitions.

Source: https://assist.dla.mil -- Downloaded: 2026-01-22T07:04:32Z
Check the source to verify that this is the current version before use.

4.5.24.1 Ambient Temperature.

a. Times under .63 seconds are classed as arming time safety failure.

b. Times .63 through 0.88 seconds are classed as arming time under minimum.

c. Times 1.26 seconds through 1.60 seconds are classed as arming time over maximum.

d. Times over 1.61 seconds or fuzes which do not arm or fuzes which time but not detent are classed as failures to arm.

4.5.24.2 Cold Temperature.

a. Times under .63 seconds are classed as arming time safety failure.

b. Times .63 through 1.08 seconds are classed as arming time under minimum.

c. Times 1.66 seconds through 2.00 seconds are classed as arming time over maximum.

d. Times over 2.01 seconds or fuzes which do not arm or fuzes which time but do not detent are classed as failures to arm.

4.5.24.3 Hot Temperature.

a. Times under .63 seconds are classed as arming time safety failure.

b. Times .63 through .88 seconds are classed as arming time under minimum.

c. Times 1.26 seconds through 1.60 seconds are classed as arming time over maximum.

d. Times over 1.61 seconds or fuzes which do not arm or fuzes which time but do not detent are classed as failures to arm.

4.5.24.4 Defect Identification. - Identification of defects as non-arm failures, arming time safety failures, arming

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T10:43:26Z
Check the source to verify that this is the current version before use.

arm will depend on both centrifuge testing and umbilical continuity examination. In addition, these type failures shall be removed and not subjected to the firing test (vibrated fuzes) or be returned to the lot (non-environmental fuzes).

4.5.24.5 Electrical Inspection of Fuzes. - All fuzes which are not classed as a failure shall be electrically inspected prior to firing for umbilical continuity.

4.5.24.6 Test Equipment Failure. - If the test equipment fails to produce an arming readout (i.e., recording paper skewes, audio pick-up or amplifier inoperative) during the arming time test as verified by the Government, the Safety and Arming Device shall be visually inspected for arming; if found to be armed or partially armed, the Safety and Arming Device shall be reset into the unarmed position, reassembled into the same fuze body and retimed once as a fuze. The only handling action performed on the Safety and Arming Device shall be the reset of the device just prior to the arming time test. The timing record produces by the fuze on the approved fuze timing equipment shall be considered the timing record of the fuze under the applicable defect classification.

4.5.24.7 Rounding of Fuze Arming Times. - Fuze arming times, if recorded to the thousandth of a second shall be "rounded off" to the nearest hundredth of a second. Example:

Cold Temperature	Ambient and Hot Temperature
.625 shall be .62	.625 shall be .62
.626 shall be .63	.626 shall be .63
1.074 shall be 1.07	0.874 shall be 0.87
1.075 shall be 1.08	0.875 shall be 0.88
1.654 shall be 1.65	1.254 shall be 1.25
1.655 shall be 1.66	1.255 shall be 1.26
2.005 shall be 2.00	1.605 shall be 1.60
2.006 shall be 2.01	1.606 shall be 1.61

4.5.25 Correlation Factor. - A correlation factor, which correlates the fuze arming time method (swing fixture) to the in-line S&A arming time method, shall be run for this fuze. Correlation tests shall be performed by the contractor with DCAS verification. Correlation factors shall be validated at six month intervals (maximum) and re-established whenever:

Source: https://assist.dla.mil Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

a. A new contract is issued

b. A change of fuze type

c. Fuze timing equipment is modified

For the correlation procedure a digital counter or an approval equivalent device shall be used, set to read milliseconds for S&A timing and set for oscillograph traces, to the nearest millisecond, for the fuze. The correlation shall be accomplished as follows:

a. Select five (5) S&A's demonstrating acceptable arming time. Each S&A shall have repeatable arming times within +25 milliseconds in five successive runs on the approved S&A timing equipment. S&A arming times readings shall be obtained from the first movement of the set-back weight to the detent locking in the rotor.

b. The same S&A's shall be assembled to electronic modules and placed in fuze bodies; secured in place with a booster housing, less "0" ring, and properly torqued. The assemblies shall then be timed five (5) times on the approved fuze timing equipment. Readings of the fuze arming time traces, from set back weight bottoming to rotor detent, shall be recorded.

c. The shift in average fuze time, if any, when compared with the average S&A time (taken as a standard) shall be used as the correlation correction and applied to the acceptance test results.

Data obtained in accordance with the above procedure shall be submitted to Commander, US Army Research and Development Command, Dover, NJ 07801, ATTN: DRDAR-QAR-M and DRDAR-QAR-I.

4.5.26 Dimensional Control of Molded or Plastic Parts. - In place of normal sampling and inspection associated with the Classification of Defects, and after a curing time for the parts has been approved (see Note 1) a sample of five (5) parts as molded form each cavity shall be fully inspected dimensionally to qualify a new or reworked cavity for use in production. The molded parts shall carry the individual cavity identification. As a control of each cavity during production, the above quantity of parts from each cavity shall be inspected for at least the defects listed in paragraphs 4.4.2.21, 4.4.2.24, 4.4.2.29, 4.4.2.31, after continous production of each 5,000 parts or at the end of each week, whichever occurs first. Of

Source: https://assist.dla.mil -- Downloaded: 2026-01-22T07:43:26Z
Check the source to verify that this is the current version before use.

the sample, one (1) part shall be the last produced. If any defective parts are found during qualification of the cavity, the cavity producing the defective part will not be used in production. If any defective parts are found when inspection is performed for the control of the cavity, the cavity producing the defective part shall be removed from production. Further, that portion of production since the last control check shall be returned to the contractor for inspection for each type of defect according to MIL-STD-105, using the AQL's detailed in the classification of defects. All cavities removed from production because of some fault, may, after reworking, be returned to production providing they pass the qualification test above. The contractor may request a change of inspection frequency providing he presents objective evidence to the contracting officer to substantiate the request.

NOTE 1: In establishing a curing time, dimensionally check ten (10) parts from each cavity at periodic intervals (e.g. every 30, 60, etc. mins.) until dimensional stability is attained. The curing time will be from the time the part comes out of the mold until dimensional stability is attained. The inspection data used in determining the curing time shall be sent to DRDAR-QAR-I and US ARRADCOM HQ., Dover, New Jersey 07801, ATTN: DRDAR-QAR-M. If there is a change in material, or in the cycle time, or if a cavity is reworked, or a new cavity is used, a new curing time shall be established and approved.

4.5.27 Pin Retention of .025 in Diameter Pin Test. - The top plate assembly shall be held securely in a holding fixture. A .025 ± .0002 pin shall be inserted into the socket. An axial pull out force of not less then 3 ounces shall then be applied to the pin. Any pin that pulls out shall then class the socket defective.

4.5.28 Umbilical Assembly Pull Test. - The umbilical assembly shall be placed in a holding fixture. A straight pull-out force of 10 pounds shall be applied at the Coaxicon Umbilical Contact Assembly. If the adhesive's seal or the cable's continuity become defective as a result of this test, the assembly shall be classed defective and be removed from the lot.

4.5.29 Temperature and Humidity. - The fuze assembly shall be subjected to the Temperature and Humidity Test per MIL-STD-331, Test 105.1 with the exception that only one 14 day cycle be used. Any fuze that does not meet MIL-STD-331 test requirements shall be classed defective.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

4.5.30 Thermal Shock.

a. The fuze shall be subjected to the Thermal Shock Test in accordance with MIL-STD-331, Test 113, These fuzes shall then be subjected to the test in paragraph 4.5.27, Part d. Any fuze that does not meet test requirements shall be classed defective.

b. The Module shall be subjected to the Thermal Shock Test in accordance with MIL-STD-331, Test 113. These modules shall then be subjected to the timing test as specified in Table VI. Any module that does not meet the test requirements shall be classed defective. **One defective shall be cause for lot rejection.**

4.5.31 Module Turn on Time. - The module shall be tested in accordance with requirement paragraph 3.4.1. Any module that does not meet the specified requirements shall be classed defective.

4.5.32 Continuity Through Detonator Test. - The S&A shall be armed in the case and the resistance measured between terminals three and four. The value shall be 3.5 $\pm$ 1.5 ohms. After the test the acceptable S&A's shall be disarmed and returned to line for further assembly. The S&A failing the requirement shall be classed defective.

4.5.33 Pull-off Test of Insulator. - Secure the setback weight in a holding fixture. An axial pull of a minimum of two pounds shall be applied to the pin assembly. Any insulator that separates from the switch pin shall be classed defective.

4.5.34 Pull-off Test of Switch Pin. - Secure the setback weight in a holding fixture. An axial pull of a minimum of five pounds shall be applied to the pin assembly. Any pin assembly that separates from the setback weight shall be classed defective.

4.5.35 Module Time Delay Function Test. - The module shall be tested in accordance with the requirements of paragraph 3.4.1. Any module that does not meet the requirements shall be classed defective.

4.5.36 Ballistic Firing Test. - The loaded M433 fuze shall be conditioned in accordance with Table VI or Table

Source: https://assist.dla.mil/ Downloaded: 2026-02-27T04:32:57Z
Check the source to verify that this is the current version before use.

VII, which ever is applicable. This test shall be performed at a Government facility. All rocket motors to be used for this test shall be temperature preconditioned to +160°F just prior to firing. M230 Photoflash warheads shall be used throughout this test. The Fuze shall be set with SAIE. The following table shall be used as acceptance criteria:

NOMINAL TIME SETTING	ACCEPTANCE CRITERIA
Super Quick (rocket must have a flight time of 15 seconds minimum)	Fire on impact.
Bunker (20MS)	Surface contact to 30 feet behind the target bunker.
200MS	Function at 400 feet ± 100 feet after first surface contact
600MS	Function at 1200 feet ± 200 feet after first surface contact

If two or more units do not meet the requirements in any one of the above time setting categories, the lot shall be rejected.

4.5.37 Data Items. - The contractor shall submit a quality inspection test demonstration and evaluation report in accordance with Data Item Description DI-R-1721 and DI-R-1724 giving the detailed test results.

5. Preparation for Delivery.

5.1 Packaging and Marking. - Level C - Packaging and marking of fuzes shall be as specified on Dwg's 8864492, 9260702 and 9260703.

5.2 Packing and Marking. - Level C - The packaged fuzes shall be packed and marked as specified on Dwg. 8886458.

6. Notes.

6.1 Definition of Safe to Handle. - The fuze will be considered safe to handle if after electronic examination and tear down the following conditions are met.

a. The rotor shall be in the safe position and secured by the setback weight such that it cannot be turned

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

to the armed position.

b. The lock roller pin on the rotor shall not be broken.

c. The setback weight shall be in the fully safe position (raised to its highest position).

d. No loose explosive shall be present in the fuze assembly.

e. No parts shall be broken or deformed which could present a safety hazard in handling or inadvertent firing.

6.2 Intended Use. - The fuze assemblies covered by this specification are intended for the 2.75 Inch Rocket System.

6.3 Ordering Data. - See MIL-A-48078 (PA).

6.4 Submission of Design for Approval. - See 6.2 of MIL-A-48078. Submit equipment designs, as required to Commander, ARRADCOM, ATTN: DRDAR-QAR-I, Dover, New Jersey 07801.

6.5 Government Furnished Parts.

6.5.1 Packaging and Packing.- The Procuring Agency will provide the packaging and the packing for the Forty Foot Drop.

6.5.2 M230 Warheads.

a. The Procuring Agency will provide M230 Warheads for the Five Foot Drop Test.

b. The Procuring Agency will provide photo flash charged M230 Warheads for the ballistic firing test.

6.6 Defect Reporting. - From each lot produced, the contractor shall submit to US ARRADCOM HQ, ATTN: DRDAR-QAR-M, results of the Module, Jolt, Jumble, Helicopter Vibration, and Centrifuge tests within three (3) days after completion of acceptance testing of the lot. If fuze and/or tests in addition to acceptance requirements are utilized to evaluate the lot, results of these tests will also be submitted three (3) days after the additional tests are completed. The defective fuzes shall be saved pending review of the results.

6.7 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as Edgewood Arsenal, Frankford

Source: https://assist.dla.mil/ Downloaded: 2026-02-26T04:32:52Z
Check the source to verify that this is the current version before use.

Arsenal, Rock Island Arsenal or Picatiny Arsenal Drawings. Technical data orginally prepared by these activities is now under the cognizance of ARRADCOM.

6.8 Data Requirements. - Deliverable data required by this specification in the following paragraph:

Paragraph	Data Requirement	Applicable DID
4.5.39	Quality Inspection Test Demonstration and Evaluation Report	DI-R-1724
4.5.39	Quality Inspection Defect Report	DI-R-1721

(Copies of data item description required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)


Custodian:
ARMY-AR

Preparing Activity
ARMY-AR

Project No: 1340-A-549

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:26Z
Check the source to verify that this is the current version before use.

TABLE VI

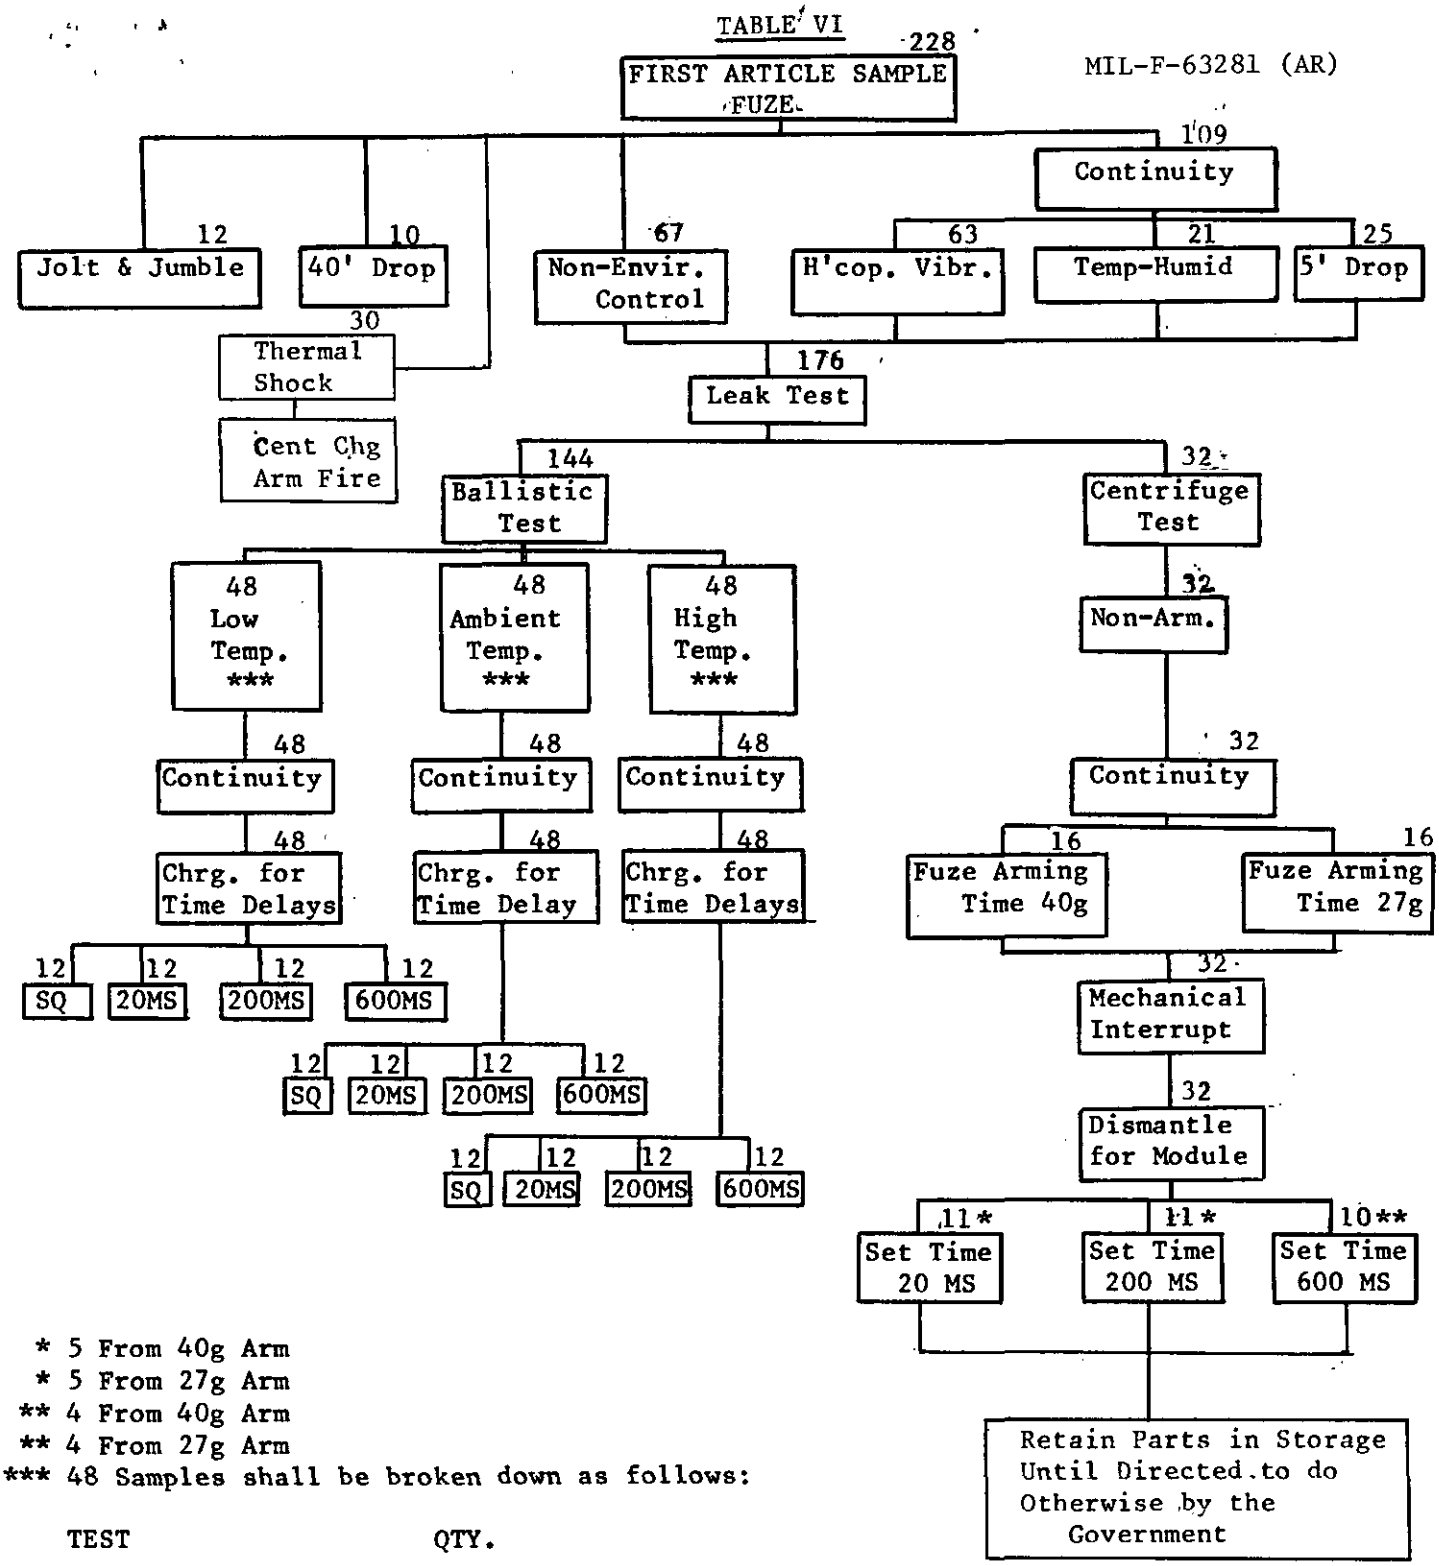

* 5 From 40g Arm
* 5 From 27g Arm
** 4 From 40g Arm
** 4 From 27g Arm
*** 48 Samples shall be broken down as follows:

TEST	QTY.
5' Drop	5
T & H	5
HV	19
Non-Environment	19

NOTE: SAIE setter to be used for delay time acceptance tests in all cases.

Source: https://assist.dla.mil-Downloaded: 2026-02-26T01:43:26Z
Check the source to verify that this is the current version before use.

TABLE VI (CONTINUED)

FIRST ARTICLE SAMPLE

MODULE

1. All modules shall be serialized.

2. Compensating setter to be used for acceptance of all modules (SAIE).

3. Fixed Voltage setter to be used for information on all modules.

4. The same units shall be tested in the same sequence using the same module for both the compensated and fixed voltage sections and data be readily identifiable back to the serialized units. There shall be a one day interval between the compensated and fixed voltage tests with the compensated test preceding the fixed voltage test.

Nominal Time Settings	Environment	Fuze Quantity	Acceptance Limits
20 MS	-65°F	70	5 to 35 MS
	+70°F	70	
	+160°F	70	
	Thermal Shock	24	
200 MS	- 65°F	70	185 to 215 MS
	+ 70°F	70	
	+160°F	70	
	Thermal Shock	24	
600 MS	- 65°F	70	570 to 630 MS
	+ 70°F	70	
	+160°F	70	
	Thermal Shock	24	


The firing capacitor shall be checked to insure that at least minimum detonator firing output pulse is present when the detonator firing circuit is tripped at the conclusion of the time delay.

5. All modules shall be checked for module turn on time. Data obtained from these checks shall be recorded and be made traceable to individual modules.

6. A seven (7) second time delay shall follow the charging of each module and before the module timing circuit is tripped.

7. Additional nominal time settings (at ambient temperature) shall be used for informational purposes only, the nominal time settings are as follows: 50 MS, 100 MS, 300 MS, 400 MS, 500 MS. Both setters shall be used. Fifty (50) additional modules are required for this test segment.

Source: https://assist.dla.mil Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

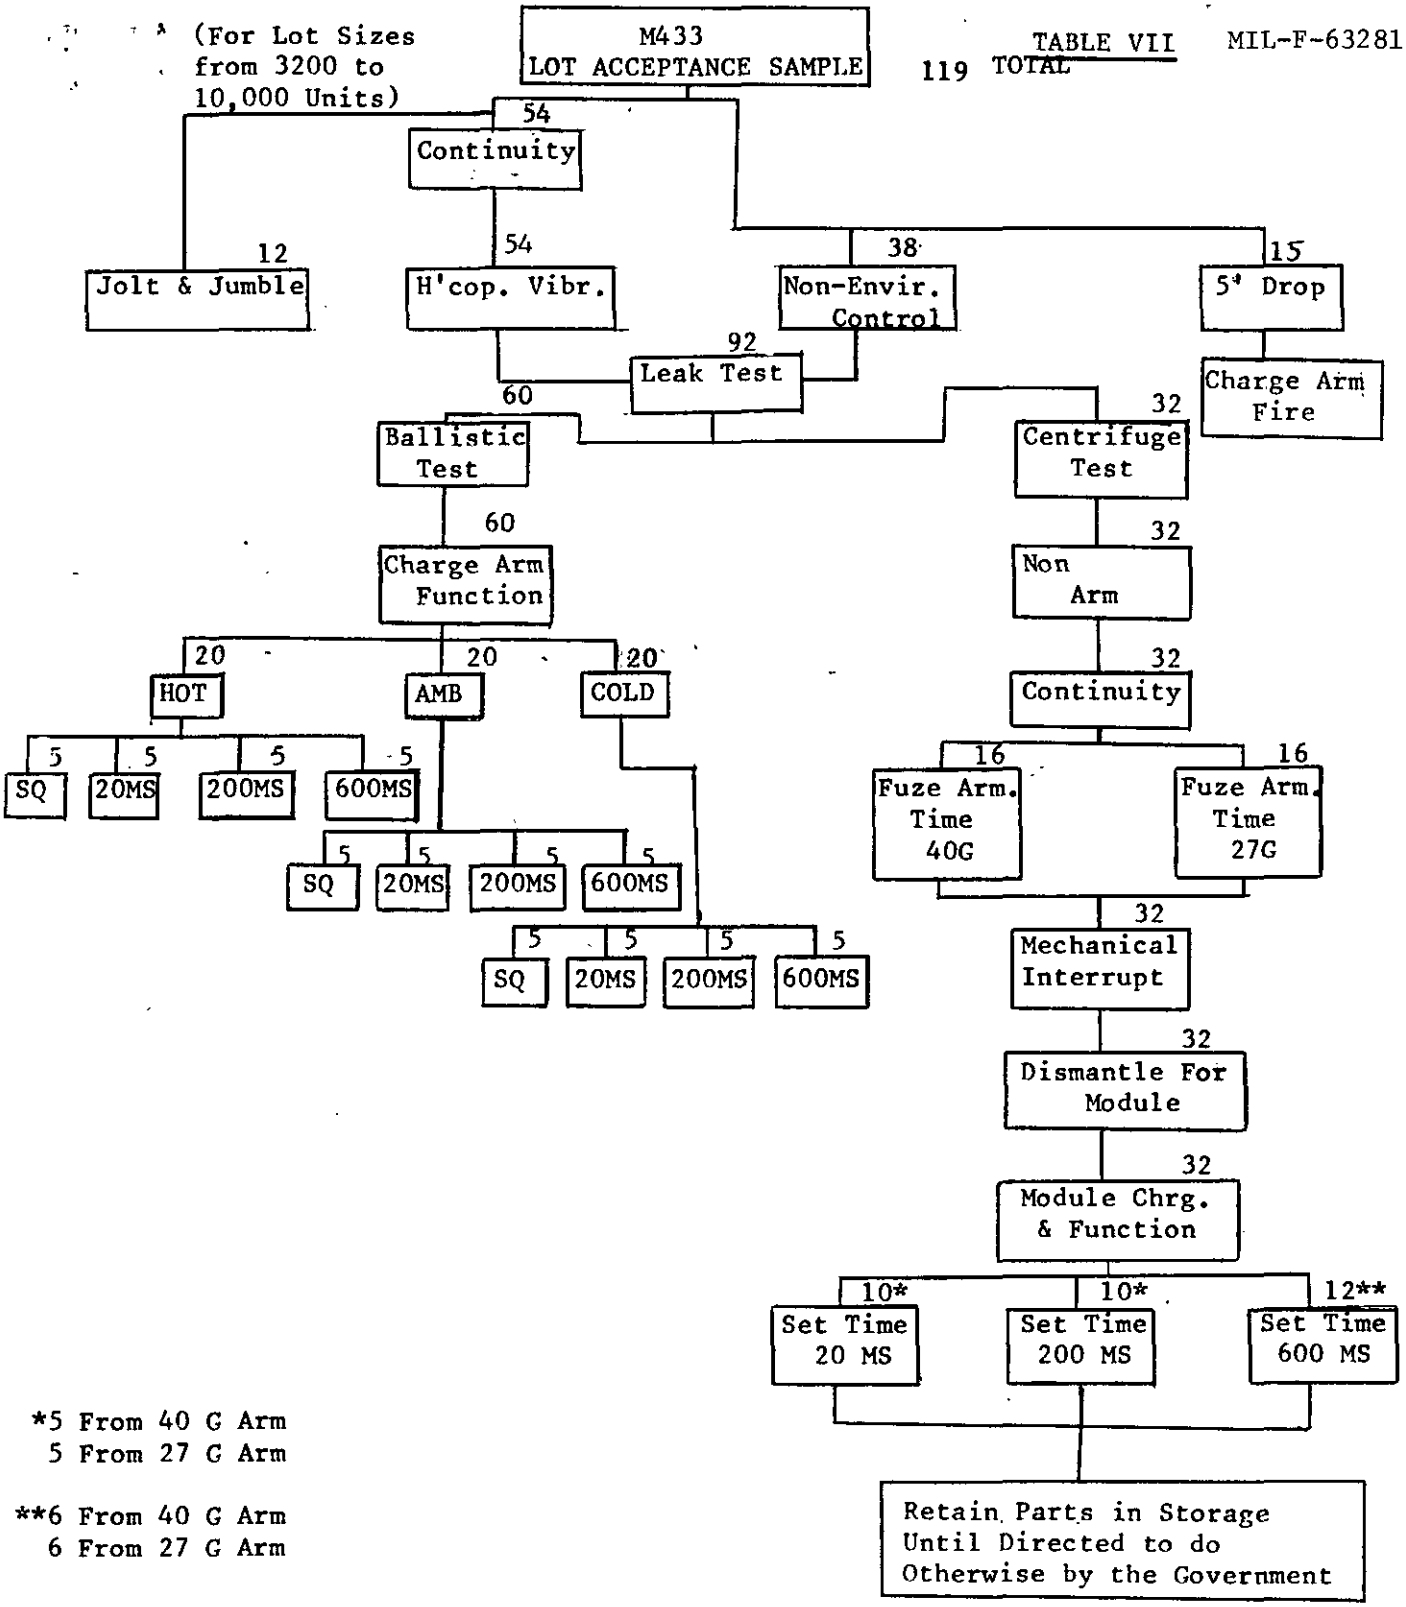

*5 From 40 G Arm
5 From 27 G Arm

**6 From 40 G Arm
6 From 27 G Arm


NOTE: SAIE setter to be used for delay time acceptance tests in all cases.

Source: https://assist.dla.mil - Downloaded: 2026-02-26T10:43:26Z
Check the source to verify that this is the current version before use.

APPENDIX A

HELICOPTER VIBRATION


One 15 minute sinusoidal sweep (5-500-5 HZ) shall be performed for each of three axes. No dwell time shall be spent on any one frequency. A search for resonance shall not be done.

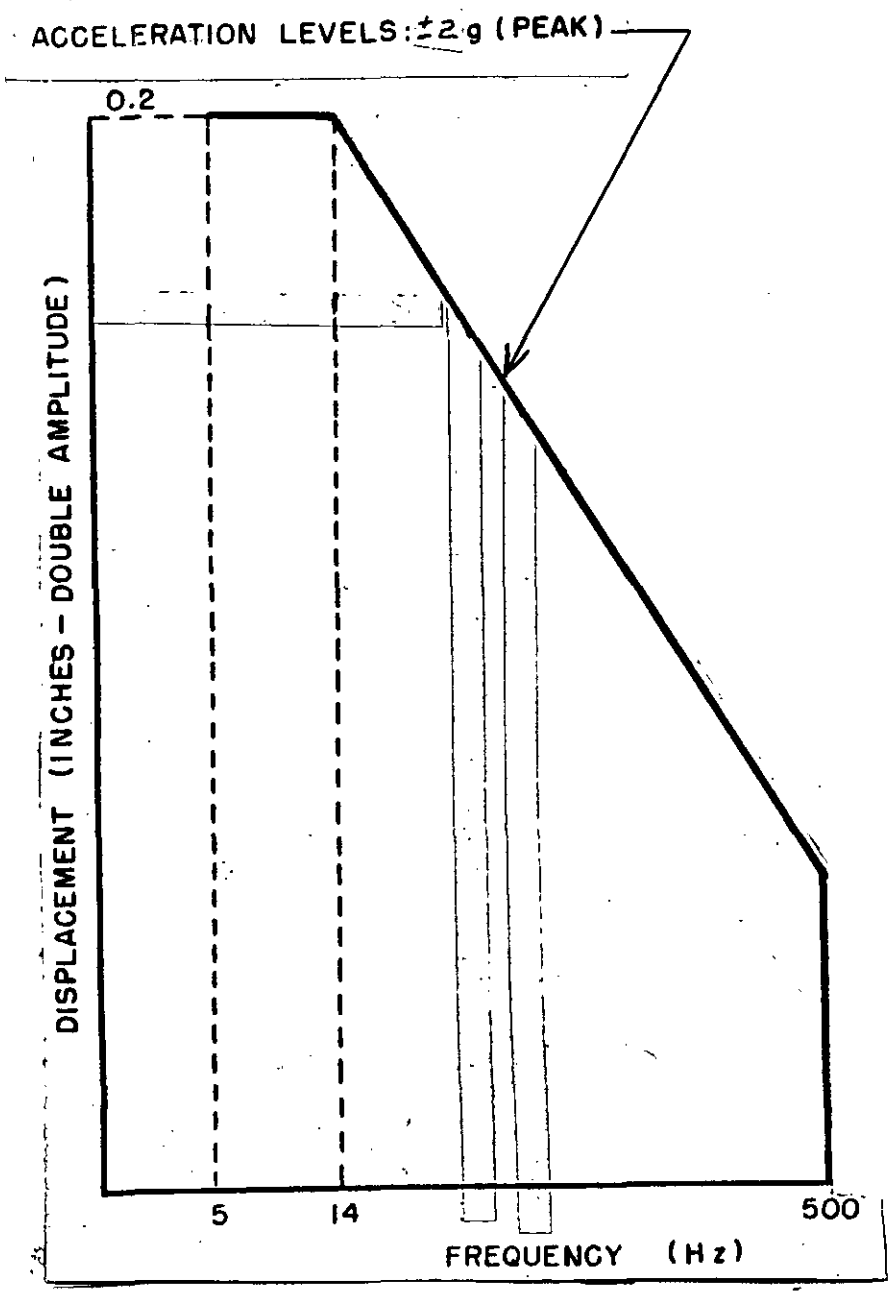

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:57Z
Check the source to verify that this is the current version before use.

APPENDIX B

M433
ELECTRONIC MODULE
TERMINAL DIAGRAM

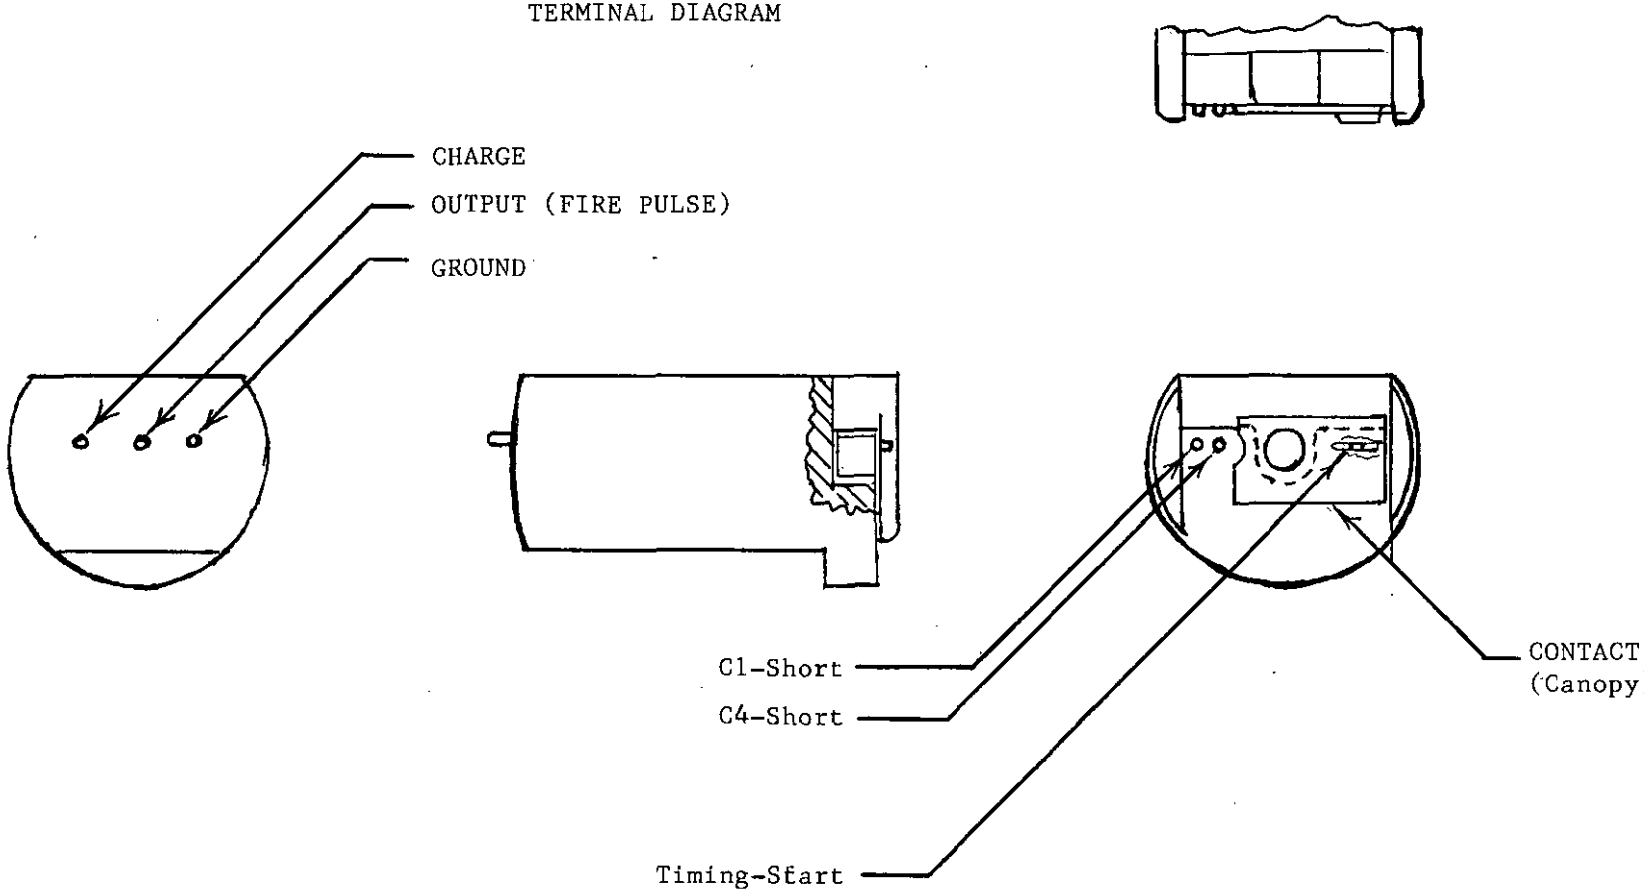

CR1, (1,2)
CR2, (C4 SHORT, 1)
REF. DWGS: 9260685
9260887
9260750

FIGURE 3.1

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:43:26Z
Check the source to verify that this is the current version before use.

APPENDIX C

M _____METAL PARTS LOT ACCEPTANCE TEST DATA

Contractor _____ Fuze Lot No.: _____

Date of Test Lot Quality (Gross): _____

Start: _____ Sample Size (Total)_____

End: _____ Sample Size

Returned to Lot: _____

Date Shipped: _____ Lot Quantity (Net): _____

Five Foot Drop Test

5' Drop

Sample Size	Serial No. of Defect	Failure Analysis

Non-Arm

Sample Size	Serial No. of Defect	Failure Analysis

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

Arming Time

Sample	Number Accepted	Serial No. of Short Times	Serial No. of Long Times	Timed but Failed to Arm	Not Timed and failed Arm	Armed but not Timed

Attach list of fuze serial numbers and arming times.

Firing Test

Sample Size	Serial No. of Defects	Failure Analysis

5' Drop Failure Analysis

Operational Tests

Vibration Test

Sample Size	Serial No. of Defects	Failure Analysis

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:52Z
Check the source to verify that this is the current version before use.

Seal Leakage Test

Sample Size	Serial No. of Defects	Failure Analysis

Fuze Non-Arm and Arming-Time Tests

Non-Arm Test

Sample Size	Serial No. of Defects	Failure Analysis

Arming Time Test

Sample Size	Number Accepted	Serial No. of Short Times	Serial No. of Long Times	Timed but Failed to Arm	Not Timed and Failed to Arm	Armed but Not Timed

Attach list of fuze serial numbers and arming times.

Failure Analysis

Correlation Factor applied to the arming time readings of the Five Foot Drop Test and the Operational Test samples was _____Seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:27Z
Check the source to verify that this is the current version before use.

Module Time Delay Tests

Sample Size	Number Accepted	Serial No. of Short Times	Serial No. of Long Times	Serial No. of Failures to Function	Serial No. of Low outputs

Jolt and Jumble

Sample Size	Serial No. of Defects	Failure Analysis

Failure Analysis

If lot failure is due to other than test conditioning.

_____
Government Inspector Date

_____
Contractor Representative Date

Source: https://assist.dla.mil -- Downloaded: 2026-02-07T04:32:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-63281 Fuze, Rocket: M433 Less Booster And Booster Lead

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:32:52Z
Check the source to verify that this is the current version before use.