
MILITARY SPECIFICATION SHEET


WASHER, SPRING TENSION, SERRATED (RIBBED) (BELLEVILLE SPRING), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the washers described herein shall consist of this document and the latest issue of DOD-W-63474.

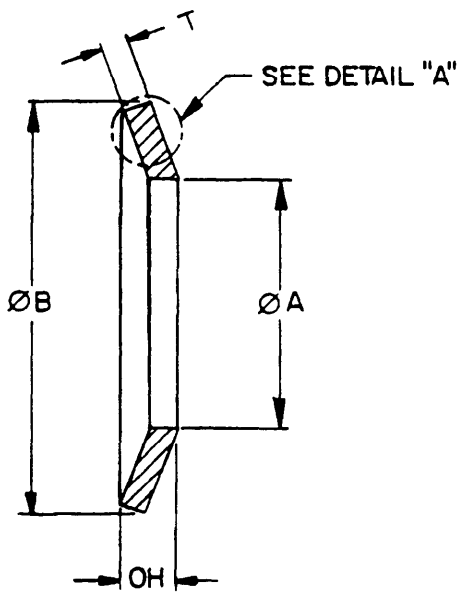

SECTION G-G

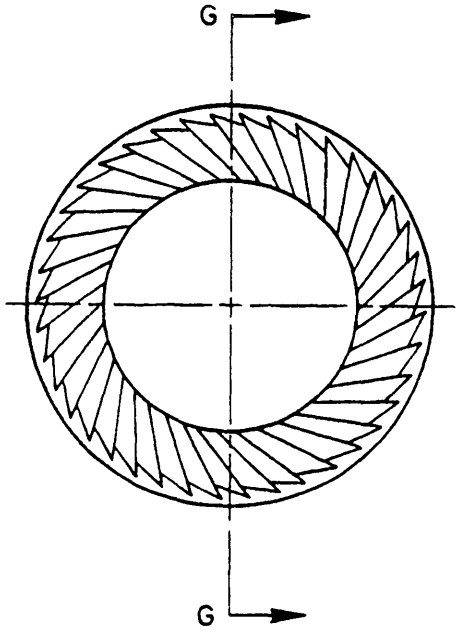



DETAIL "A"
SEE NOTE 2

NOTE:

1. All dimensions are in millimeters, see Table I for dash numbers and dimensions.

2. Washers have counterclockwise sawtooth surfaces top and bottom with a plan view rake angle of $30^{\circ} \pm 5^{\circ}$.

3. Break all edges, remove all burrs.

FIGURE 1. WASHER, SPRING TENSION, SERRATED (RIBBED) (BELLEVILLE SPRING), METRIC

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


1. Material: Spring steel, Grades 1050 thru 1095 (UNS G10500 thru UNS G10950) in accordance with ASTM A684/A684M. Phosphor bronze, composition A, hard, (UNS C51000) in accordance with QQ-B-750.

2. Protective coating and surface treatment:

   "P" - Plain or uncoated
   "C" - Cadmium plate

3. Part number: The part number consists of the letter "D" the basic number of the specification sheet, followed by a material code letter, a dash number taken from Table I and a finish code.

Example: D63474/3-S01C

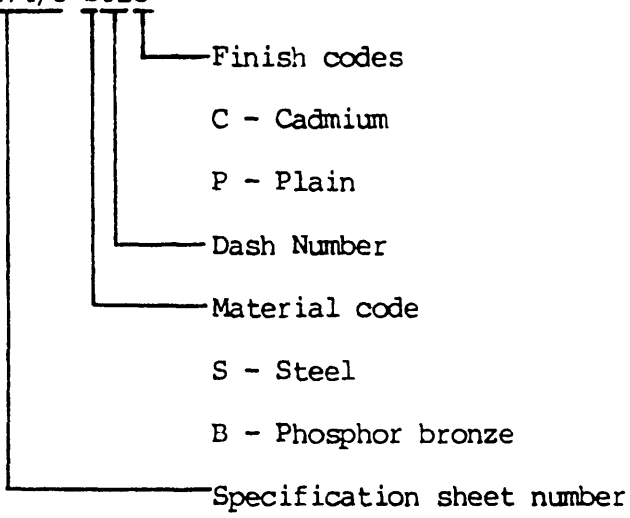

D63474/3-S01C indicates: Washer, spring tension, serrated (ribbed) (Belleville spring); Spring steel, Cadmium plated; 1.4 mm ID; 2.4 mm OD; .4 mm thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	NOMINAL WASHER SIZE	ØA		ØB		THICKNESS		OVERALL HEIGHT OH (REF)
		ID	TOL	OD	TOL	T	TOL	
01	1.2	1.4	+0.060 0	2.4	0 −0.20	0.4	±.04	.6
02	1.6	1.7		3.2		0.4		.6
03	2	2.2		4		0.4		.6
04	2.5	2.7	+0.10 0	5		0.5		.7
05	3.0	3.2		5.5	0 −0.50	0.5		.7
06	3.5	3.7		6		0.5		.8
07	4	4.3		7		0.5		.8
08	5	5.3	+0.12 0	9		0.6	±.05	1.0
09	6	6.4		10	0 −0.65	0.7		1.0
10	8	8.4	+0.15 0	13		0.8		1.2
11	10	10.5		16		1.0	±.06	1.6
12	12	13	+0.18 0	18		1.1	±.07	2.0
13	14	15		22		1.2		2.1
14	16	17		24		1.3	±.08	2.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:57Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - AV, ER
Navy - AS, SH
Air Force - 11, 82
DLA - IS

User activities:
Navy - MC, YD

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5310-1433)

Source: https://assist.dla.mil -- Downloaded: 202640-23T02:57Z
Check the source to verify that this is the current version before use.