MILITARY SPECIFICATION

CASE, CARRYING: 8213884

This amendment forms a part of Military Specification MIL-C-60126A(MU), dated 30 March 1966.

Paragraph 2.1, Delete: "QQ-B-655 Brazing Alloy, Aluminum and Magnesium, Filler Material" and "MMM-A-132 Adhesives, Heat Resistant, Airframe, Structural, Metal to Metal".

Paragraph 2.1, Add: "MIL-C-21567 Compound, Silicone, Soft Film".

Paragraph 2.1, Add: "MIL-B-23362 Brazing of Aluminum, and Aluminum Alloys".

Paragraph 2.1, Standard, Add: "MIL-STD-417 Rubber Compositions, Vulcanized General Purpose, Solid (Symbols and Tests)".

Paragraph 2.1, Drawing, Delete: "B8582669 Hinge" and substitute "C10543309 Hinge".

Paragraph 2.1, Drawing, Delete: "B10543502 Extrusion, Male" and substitute "B10553446 Extrusion, Male".

Paragraph 2.1, Drawing, Delete: "B10543503 Extrusion, Female" and substitute "B10552425 Extrusion, Female".

Paragraph 2.1, Drawing, Delete: "C8582671 Fastener" and substitute "B10553445 Clamp Assembly".

Paragraph 3.5.1: Delete in entirety and substitute the following:

"3.5.1 Extrusion edge assemblies.- The upper extrusion edge (female) DrawingB10552425 and the lower extrusion edge (male) Drawing B10553446 shall be formed in one continuous operation by proven forming techniques and controlled tooling to provide uniformity of alignment, flatness and shall fit freely in each other when case is closed. The formed extrusions shall be free of chatter, tool marks and distortions. The extrusions shall be joined by butt welding or brazing and shall be ground smooth and exhibit soundness of good practices in accordance with MIL-W-8604 and MIL-B-23362."

Paragraph 3.5.1.2: Delete in entirety and substitute the following:

"3.5.1.2 Bonding of extrusions.- The extrusion edge assemblies shall be attached to the case shells with an air curable adhesive sealant, conforming to Dow Corning Corp., Midland, Michigan, Silastic RTV 735

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:11Z
Check the source to verify that this is the current version before use.

and Primer 1200 or equal. The primer shall be applied to the mating surfaces of the shells and extrusions and permitted to dry for a minimum of thirty (30) minutes. The sealant shall be applied into the extrusion well and the extrusions shall be assembled to the shells to provide structural integrity and a watertight joint. Minimum cure time for sealant is twenty-four (24) hours."

Paragraph 3.5.2: Delete in entirety and substitute the following:

"3.5.2 Clamp assemblies.- Two (2) clamp assemblies conforming to Drawing B10553445 shall be finished in accordance with Finish No. 21.3 of MIL-STD-171, Color X24087 of FED-STD-595. The clamps shall be butted against the underside of the male extrusion, located and attached to the case assembly with four (4) rivets conforming to MS-16535-118 and four (4) washers conforming to MS-15795-804, as shown on Figure 1. Manufactured heads of rivets shall be on the exterior of the case. Rivet heads shall be touched up with paint conforming to TT-E-529, Color X24087 of FED-STD-595."

Paragraph 3.5.3, Delete: "8582669-1" and substitute "10543309".

Paragraph 3.5.6: Delete in entirety and substitute the following:

"3.5.6 Sealing gasket.- Gasket shall be fabricated of rubber .156 O.D. by .093 I.D. conforming to MIL-R-3065; Type S, Class SC, Grade No. SC415 A_1 B_1 F_2 K of MIL-STD-417. The gasket shall be formed by vulcanizing or butt bonding. Butt bonding shall be accomplished with adhesive conforming to MIL-A-5092, Type II. Prior to inserting the gasket in the female extrusion edge, adhesive conforming to MIL-A-5092, Type II shall be uniformly applied within the well. There shall be no evidence of excess adhesive in the gasket well. The exposed gasket shall be surface treated with a soft film silicone compound conforming to MIL-C-21567 (see Figure 1A)."

Delete: "Figures 1, 1A, 2, 3 and 4" and substitute attached "Figures 1, 1A, 2, 3 and 4".

Custodian:

Army - MU

Preparing activity:

Army - MU

Project No. 1220-A304Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:11Z
Check the source to verify that this is the current version before use.

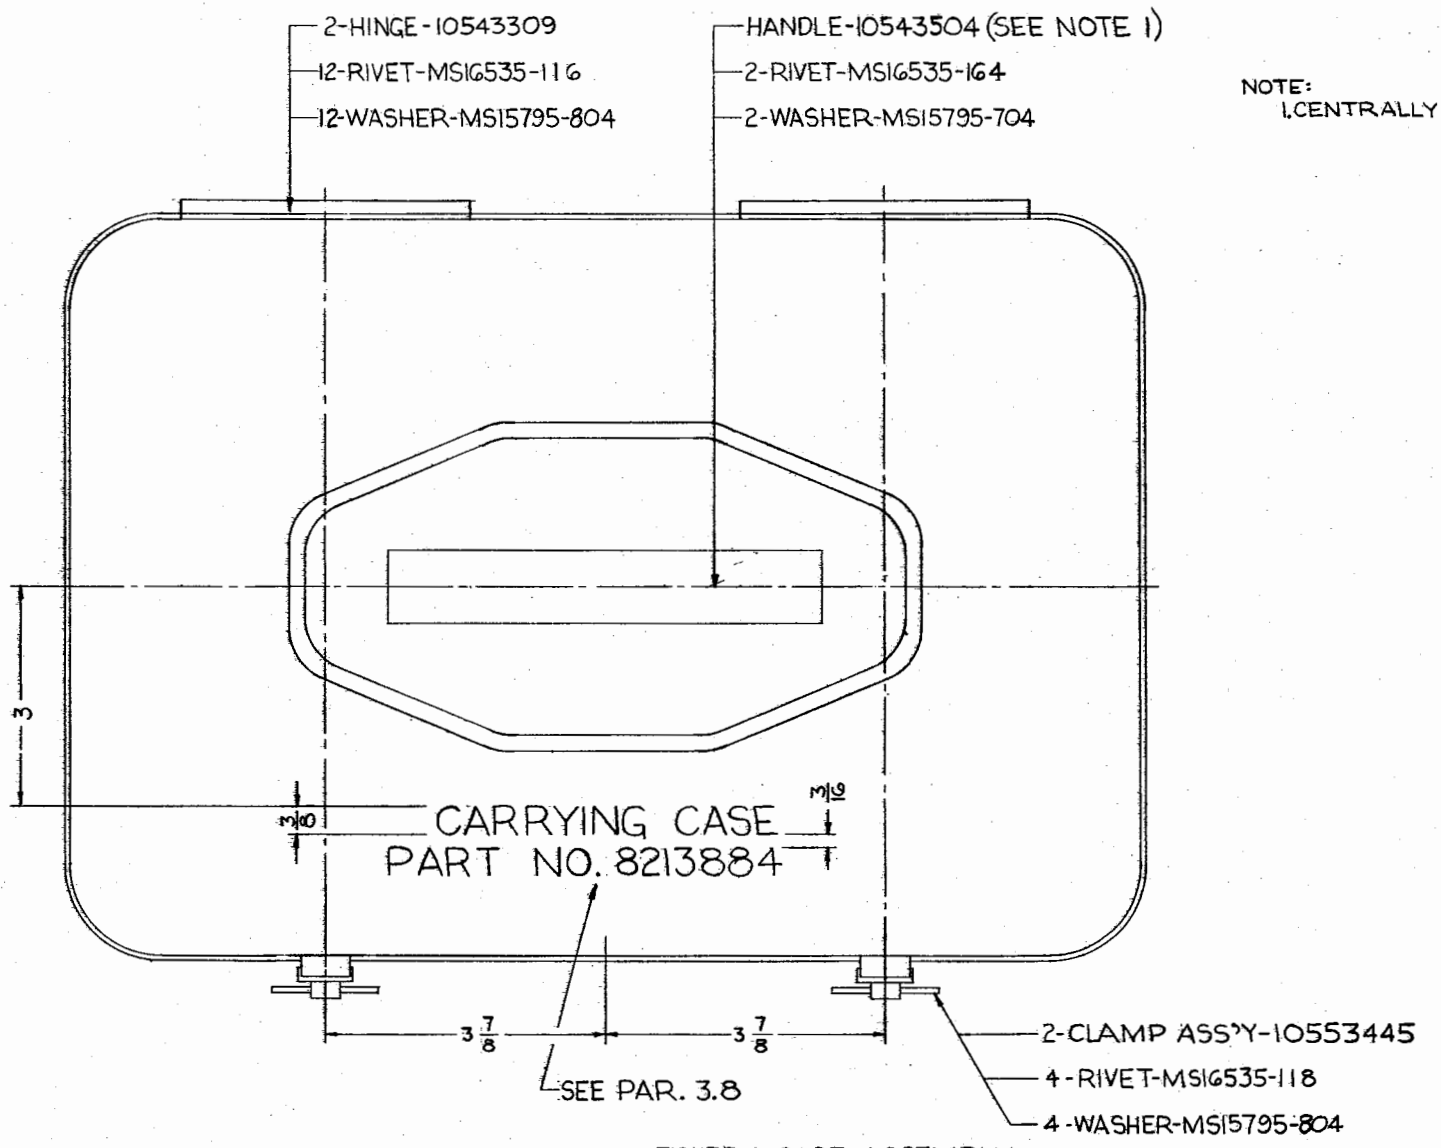


FIGURE 1-CASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:11Z
Check the source to verify that this is the current version before use.


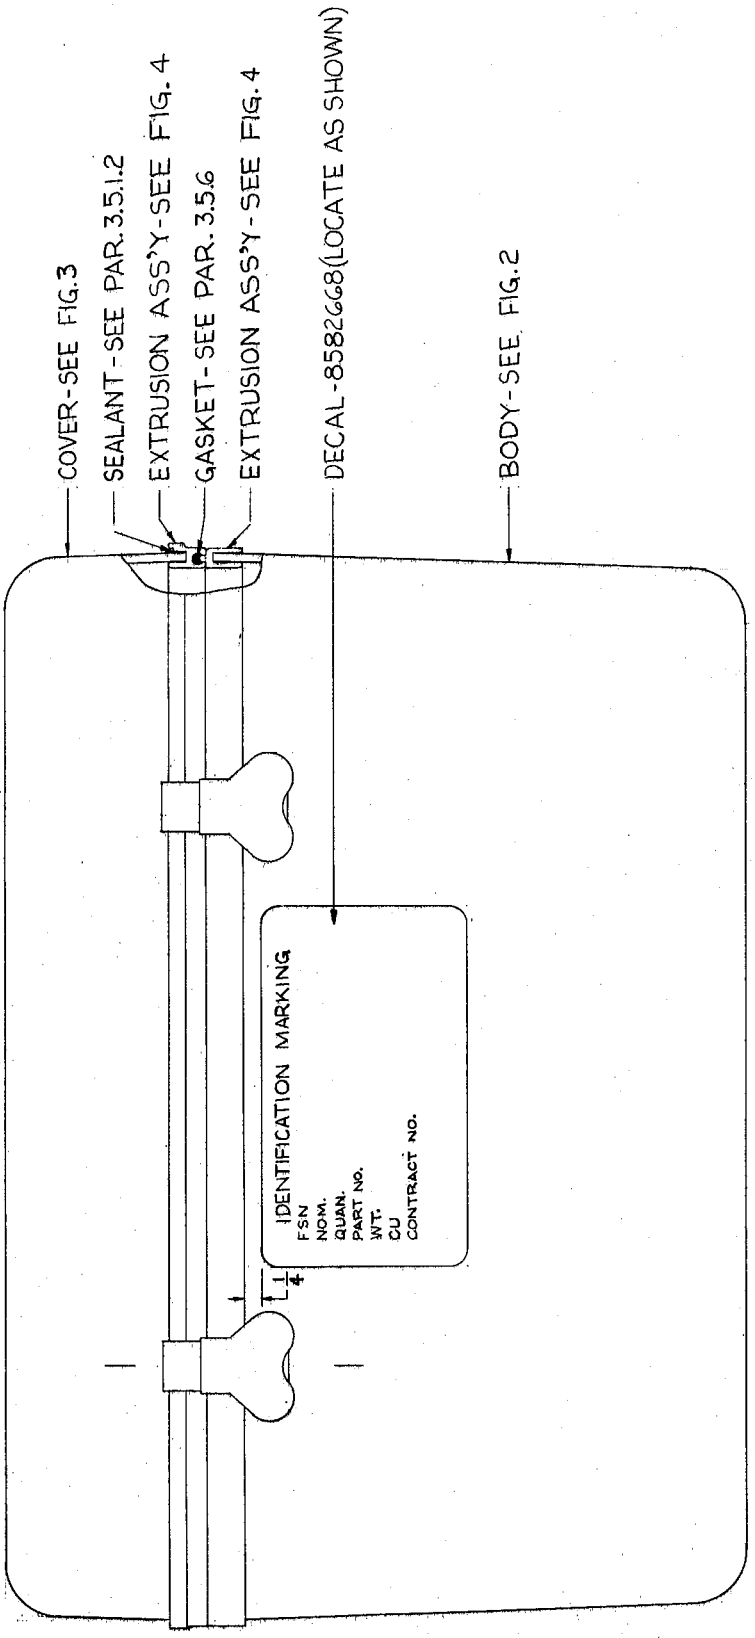


FIGURE 1A-CASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:11Z
Check the source to verify that this is the current version before use.

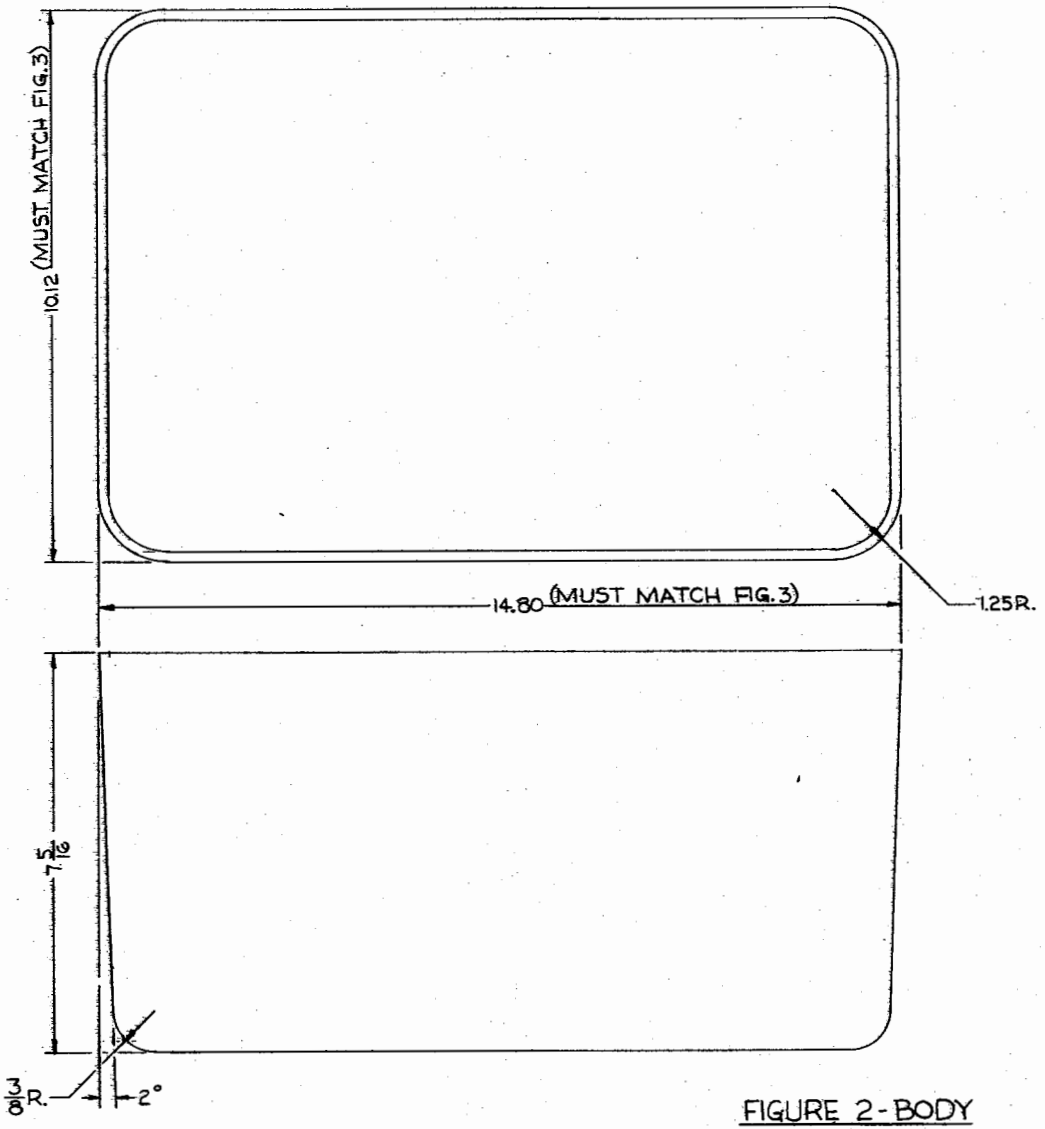

NOTES:

1. MATERIAL-ABS PLASTIC, PER PAR. 3.3, COLOR OLIVE DRAB, X24087 OF FED-STD-595.
   APPROVED SOURCE:
   U.S. RUBBER CO., CHICAGO, ILLINOIS
   PART NO. R40-43/3-CPA1492
   STARTING THICKNESS-.187


2. TOLERANCES- ANGLES ±0°30'
   FRACTIONS ±1/32
   DECIMALS ±.03

FIGURE 2-BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:11Z
Check the source to verify that this is the current version before use.

NOTES:
1. MATERIAL-ABS PLASTIC, PER PAR. 3.3,
COLOR-OLIVE DRAB, X24087 OF FED-STD-595.
APPROVED SOURCE:
U.S. RUBBER CO., CHICAGO, ILLINOIS
PART NO. R40-433-CPA1492
STARTING THICKNESS-.125


2. TOLERANCES-ANGLES ±0° 30'
FRACTIONS ±1/32
DECIMALS ±.03

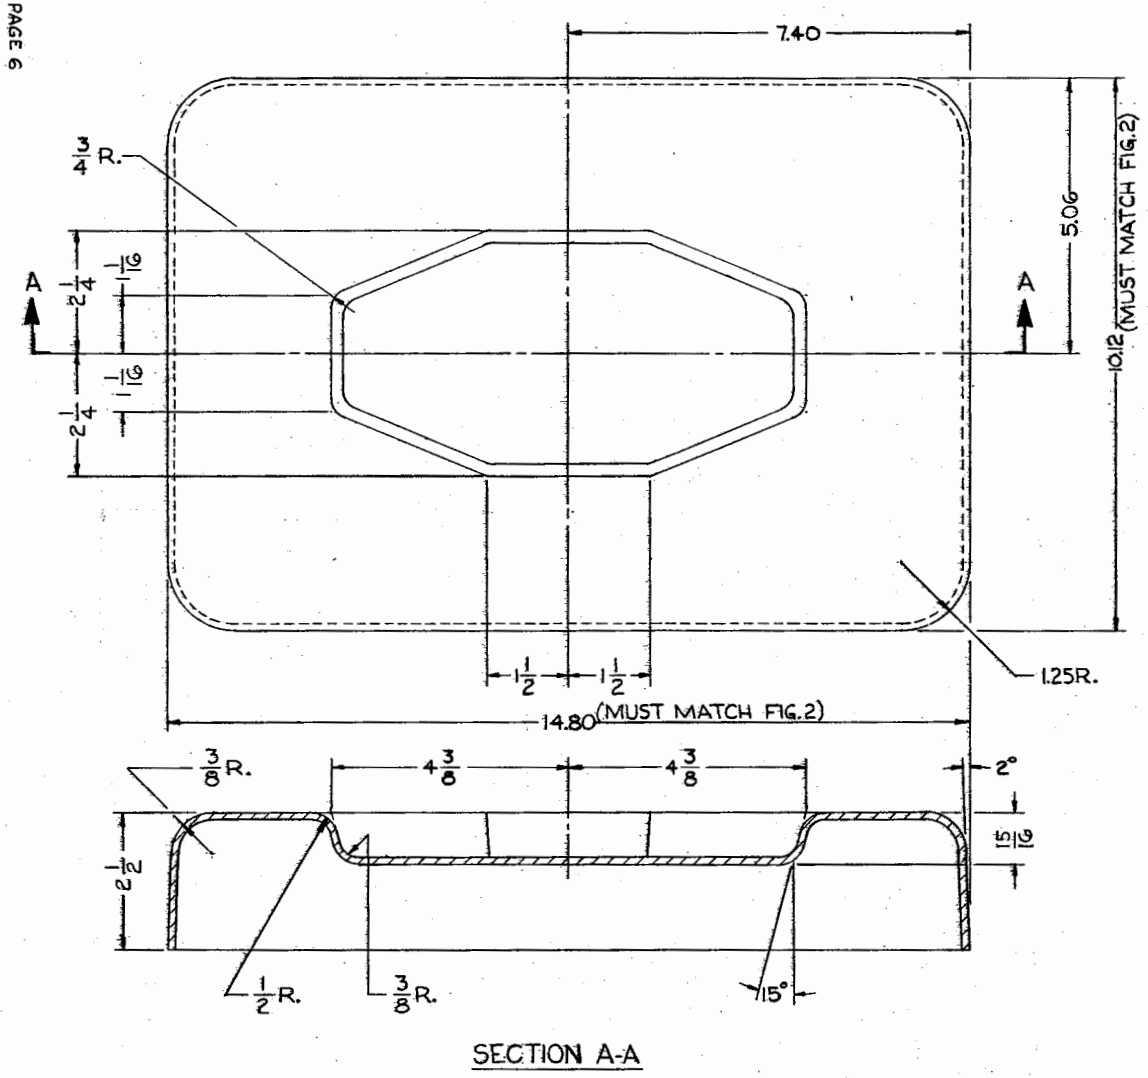


SECTION A-A

FIGURE 3-COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:11Z
Check the source to verify that this is the current version before use.

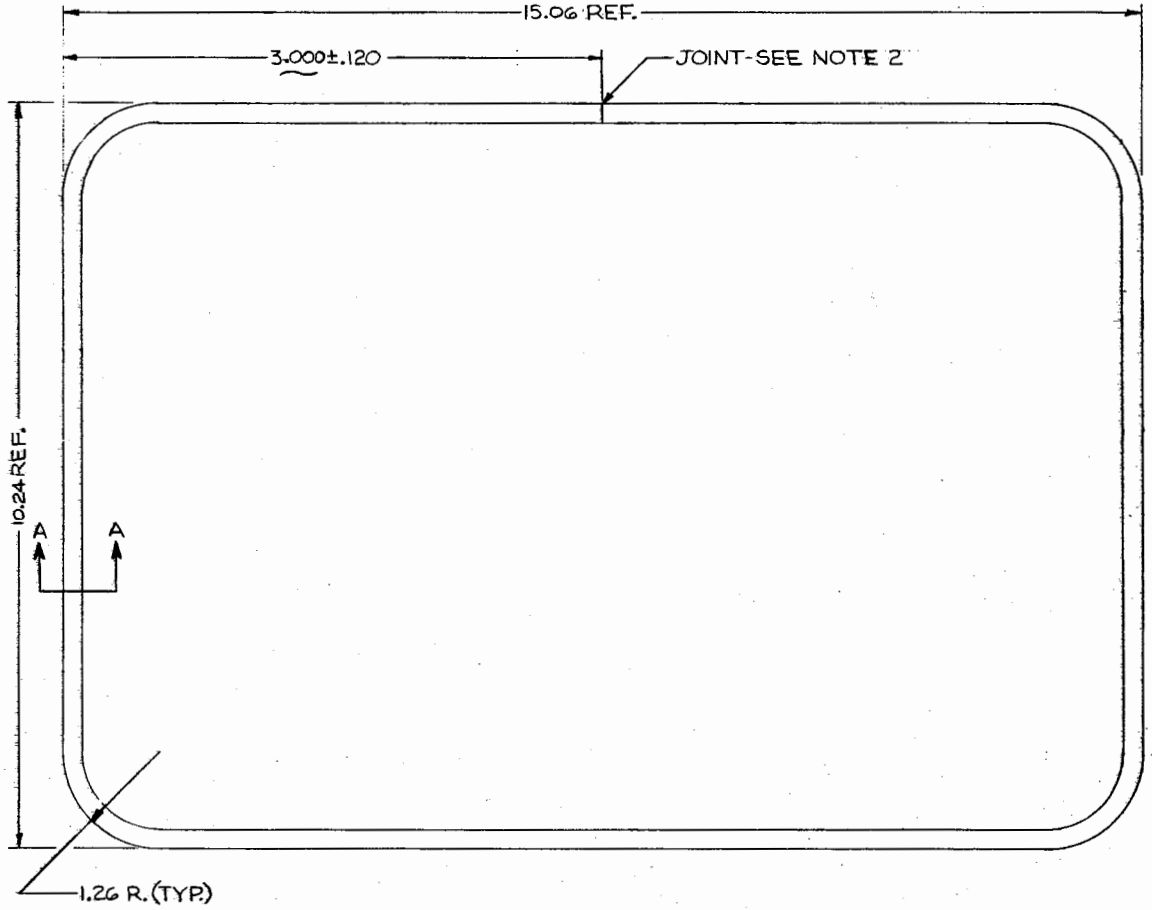

NOTES:
1. COMPLETED EDGE FRAMES SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN SECTION "A-A" & MUST MATCH SHELLS SHOWN IN FIGURES 2 & 3.
2. EXTRUSIONS SHALL BE FORMED, WELDED OR BRAZED, & FINISHED IN ACCORDANCE WITH PARA. 3.5.1 & 3.5.1.1

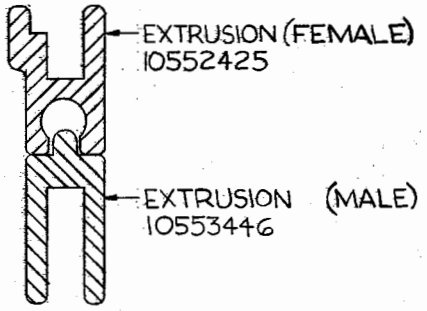

SECTION A-A

FIGURE 4-EXTRUSION ASSEMBLIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:11Z
Check the source to verify that this is the current version before use.