
MILITARY SPECIFICATION SHEET


CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG WITH PIN CONTACTS, 2 KEYING PINS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

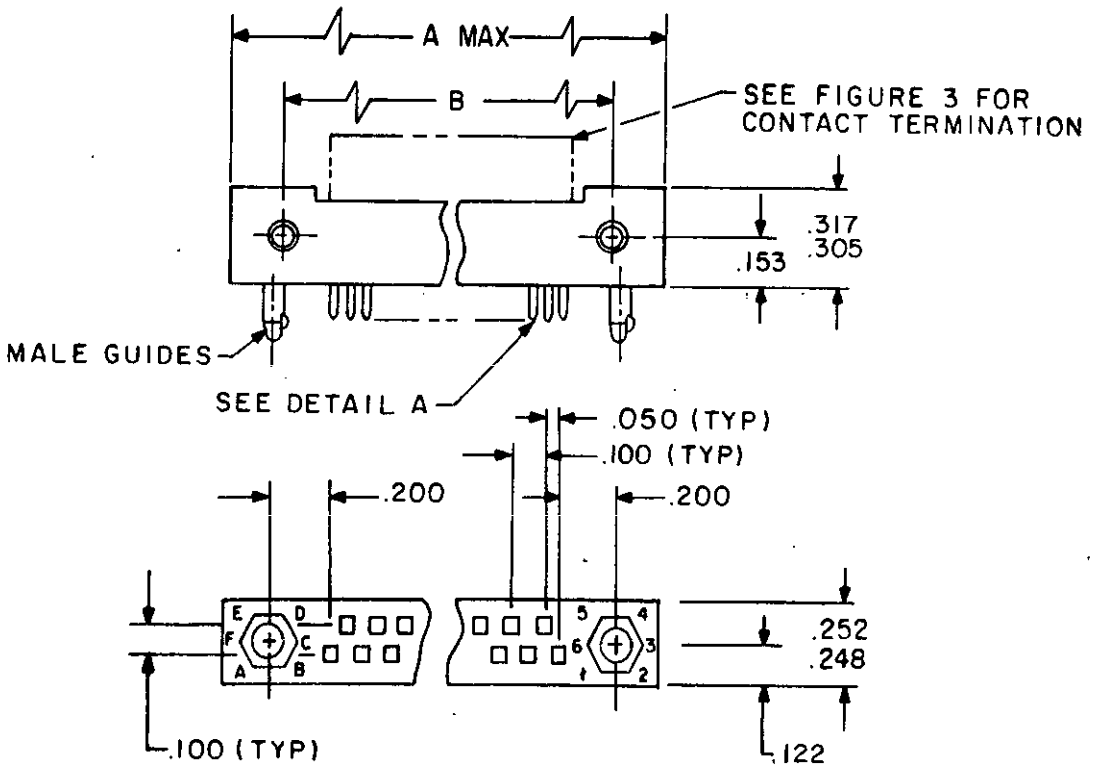

INCHES	MM	INCHES	MM
.004	0.10	.142	3.61
.008	0.20	.153	3.89
.012	0.30	.189	4.80
.020	0.51	.200	5.08
.0229	0.582	.248	6.30
.0244	0.620	.252	6.40
.050	1.27	.305	7.45
.100	2.54	.317	8.05
.122	3.10		

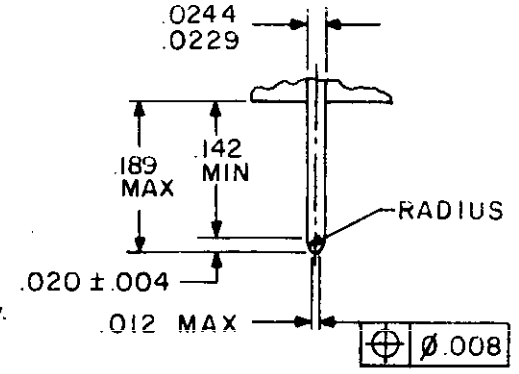

DETAIL A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005(.13 mm).

FIGURE 1. Connector, plug (.100 inch spacing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

FSC 5935

TABLE I. Arrangements and characteristics.

Contact arrangement	No of contacts	Dimensions (inches)	
		A MAX	B ±.006
M55302/140A	17	1.516 (38.50)	1.200 (30.48)
M55302/140B	29	2.114 (53.70)	1.800 (45.72)
M55302/140C	33	2.314 (58.80)	2.000 (50.80)
M55302/140D	41	2.716 (69.00)	2.400 (60.96)
M55302/140E	53	3.315 (84.20)	3.000 (76.20)
M55302/140F	65	3.917 (99.50)	3.600 (91.44)


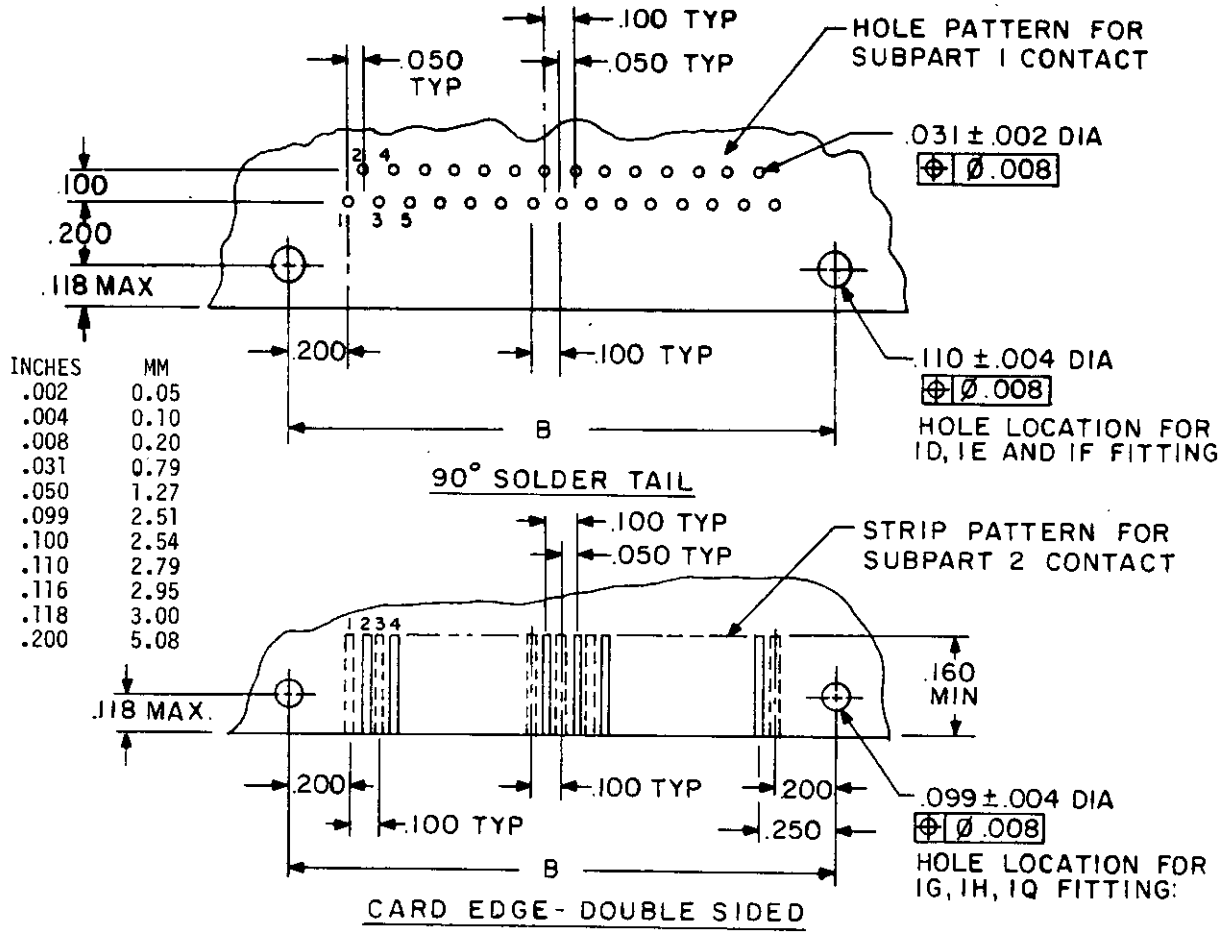



FIGURE 2. Recommended hole patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

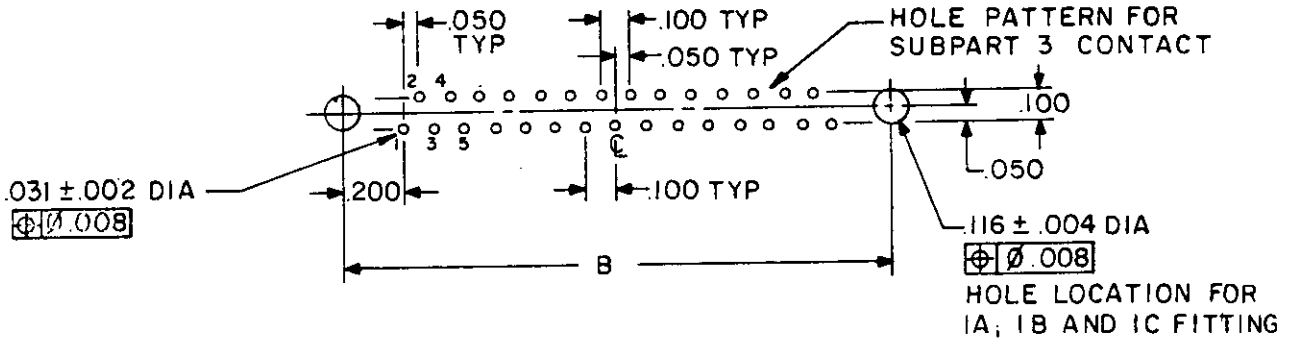


STRAIGHT-THRU SOLDER TAIL


FIGURE 2. Recommended hole patterns - Continued.




Part number
M55302/140A

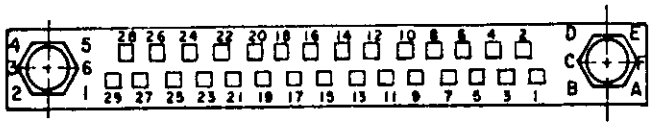


Part number
M55302/140B

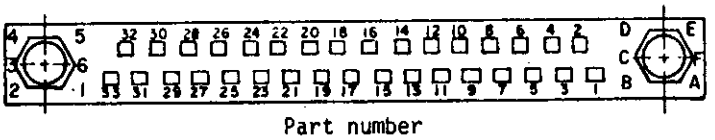


Part number
M55302/140C

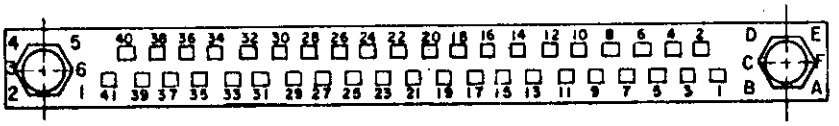

Part number
M55302/140D

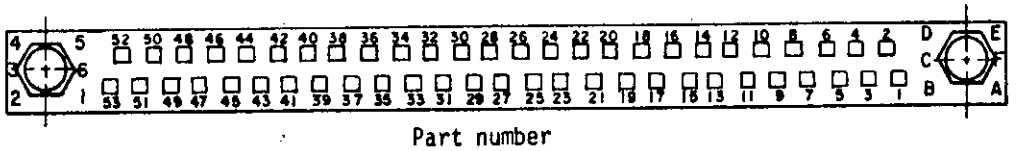


Part number
M55302-140E

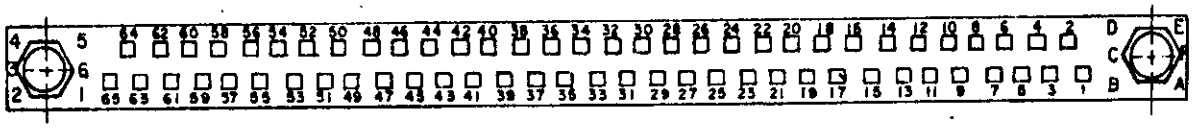

Part number
M55302/140F

FIGURE 3. Contact arrangements and keying arrangements.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

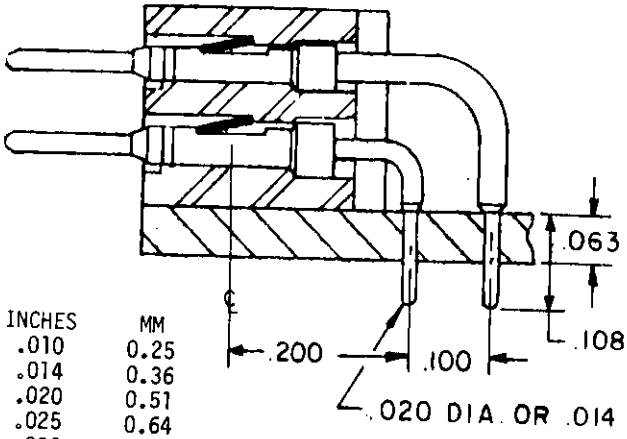

INCHES	MM
.010	0.25
.014	0.36
.020	0.51
.025	0.64
.039	0.99
.063	1.60
.067	1.70
.100	2.54
.108	2.74


Subpart 1

90° Solder tails

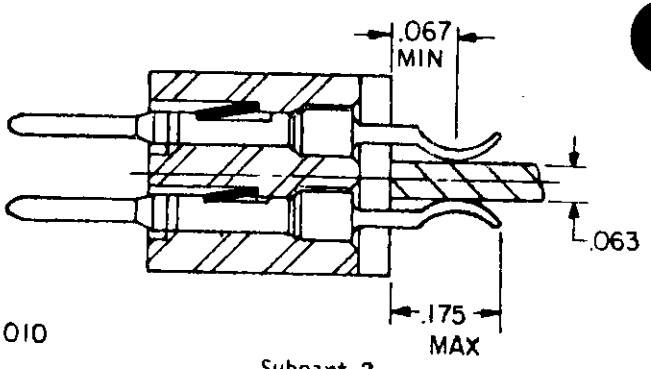

Subpart 2


Card edge

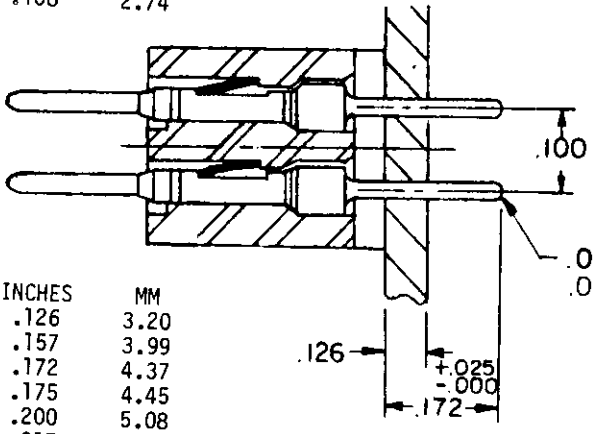

INCHES	MM
.126	3.20
.157	3.99
.172	4.37
.175	4.45
.200	5.08
.217	5.51
.236	5.99
.566	14.38


Subpart 3

Solder tails

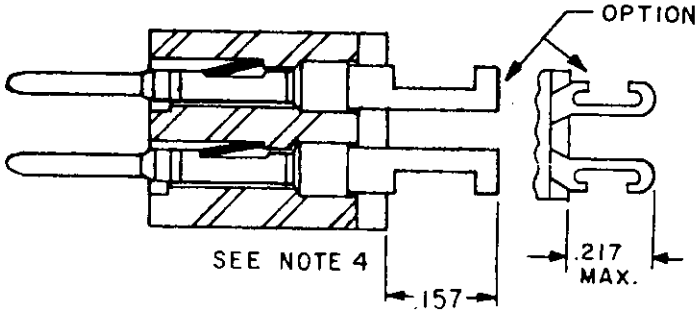


Subpart 4

Solder terminals.

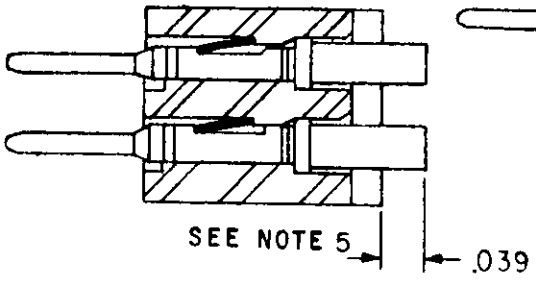


Subpart 5

Crimp 22-26 AWG

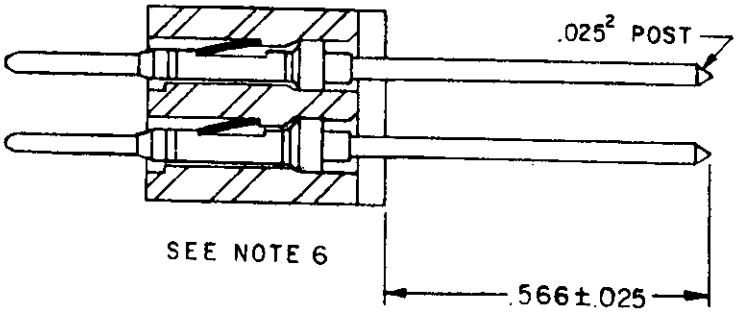

Subpart 6

Wire wrappost

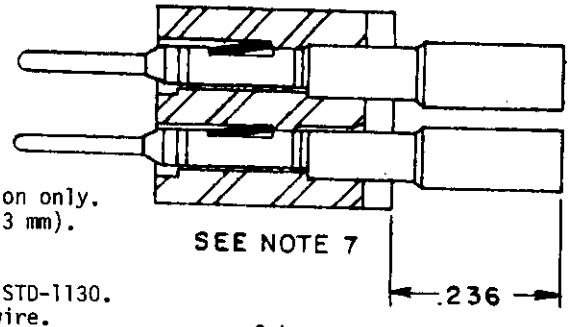


Subpart 7

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Solder tail accepts no. 22 AWG wire.
5. Crimp contact accepts no. 22-26 AWG wire.
6. Contact with .025 in^2 (0.64 mm^2) wrappost per MIL-STD-1130.
7. Crimp contact with insulation support no. 22 AWG wire.

FIGURE 4. Connector terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

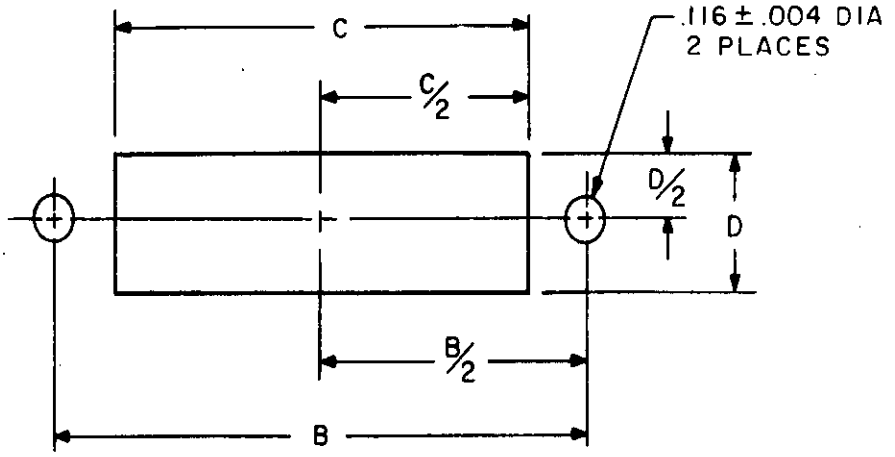

FIXED MOUNT

Number of Contacts	17	29	33	41	53	65
B ±.008 (±0.20)	1.200 (30.48)	1.800 (45.72)	2.000 (50.80)	2.400 (60.96)	3.000 (76.20)	3.600 (91.44)
C Min.	1.020 (25.91)	1.618 (41.10)	1.819 (46.20)	2.221 (56.41)	2.819 (71.60)	3.422 (86.92)
D Min.	.374 (9.50)	.374 (9.50)	.374 (9.50)	.374 (9.50)	.374 (9.50)	.374 (9.50)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 5. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures and table I.

Material and finish:

Insulator: Flame retardant diallyl phthalate, per MIL-M-14, type SDGF.

Contact identification: See figure 3.

Contact retention: 4 pounds minimum per contact.

Contact engagement: 0.7 ounce minimum, 4 ounces maximum power contacts.

Contact separation: 0.5 ounce minimum all power contact.

Contact resistance: The contact resistance shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating, maximum: 2.5 amperes at 25°C.

Keying pin: Two hexagonal keyed guides provide 36 polarizing positions. Keys are constructed per M55302/154. Connectors are supplied with hex pins in the "1" and "A" positions. When required, connectors can be easily keyed to the desired position by using a standard wrench or screwdriver.

Crimping tools:

Basic tool: M22520/2-01.

Positioner: M22520/2-37.

Removal tool (for crimp contacts): See M81969/40-01.


Hood types: See MIL-C-55302/155.

Mounting hardware: See MIL-C-55302/154, table I, plug.

Mating connectors: Shall conform to MIL-C-55302/142.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

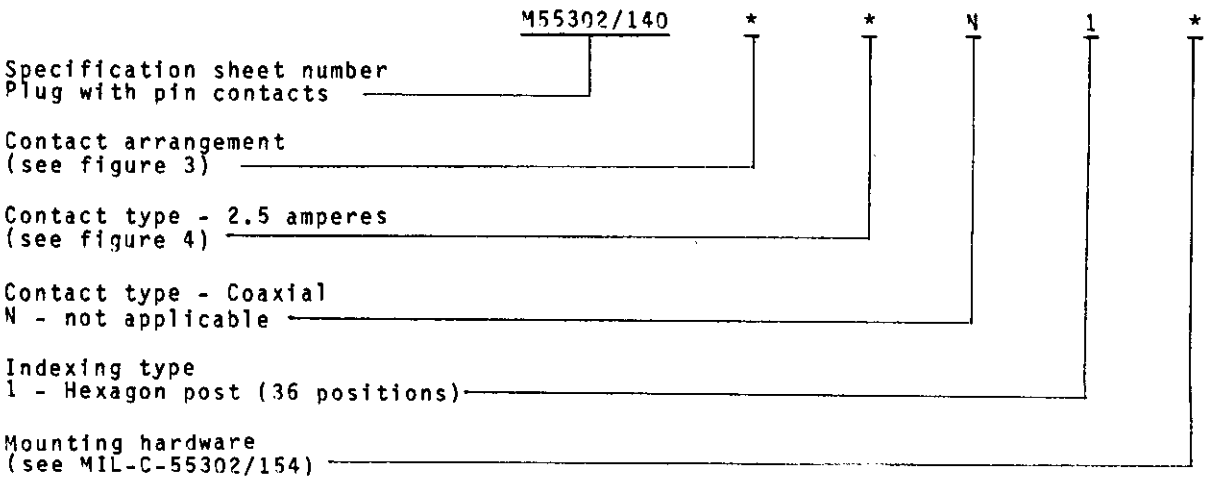

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA-ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-3373-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:52Z
Check the source to verify that this is the current version before use.