INCH-POUND

MIL-DTL-55302/167B
13 May 2005
SUPERSEDING
MIL-C-55302/167A(USAF)
10 June 1986

DETAIL SPECIFICATION SHEET

# CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: LOW MATING FORCE, MALE BRUSH, STRAIGHT-THROUGH, POLARIZED, WITH WRAPPOST TERMINATION (.100 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.


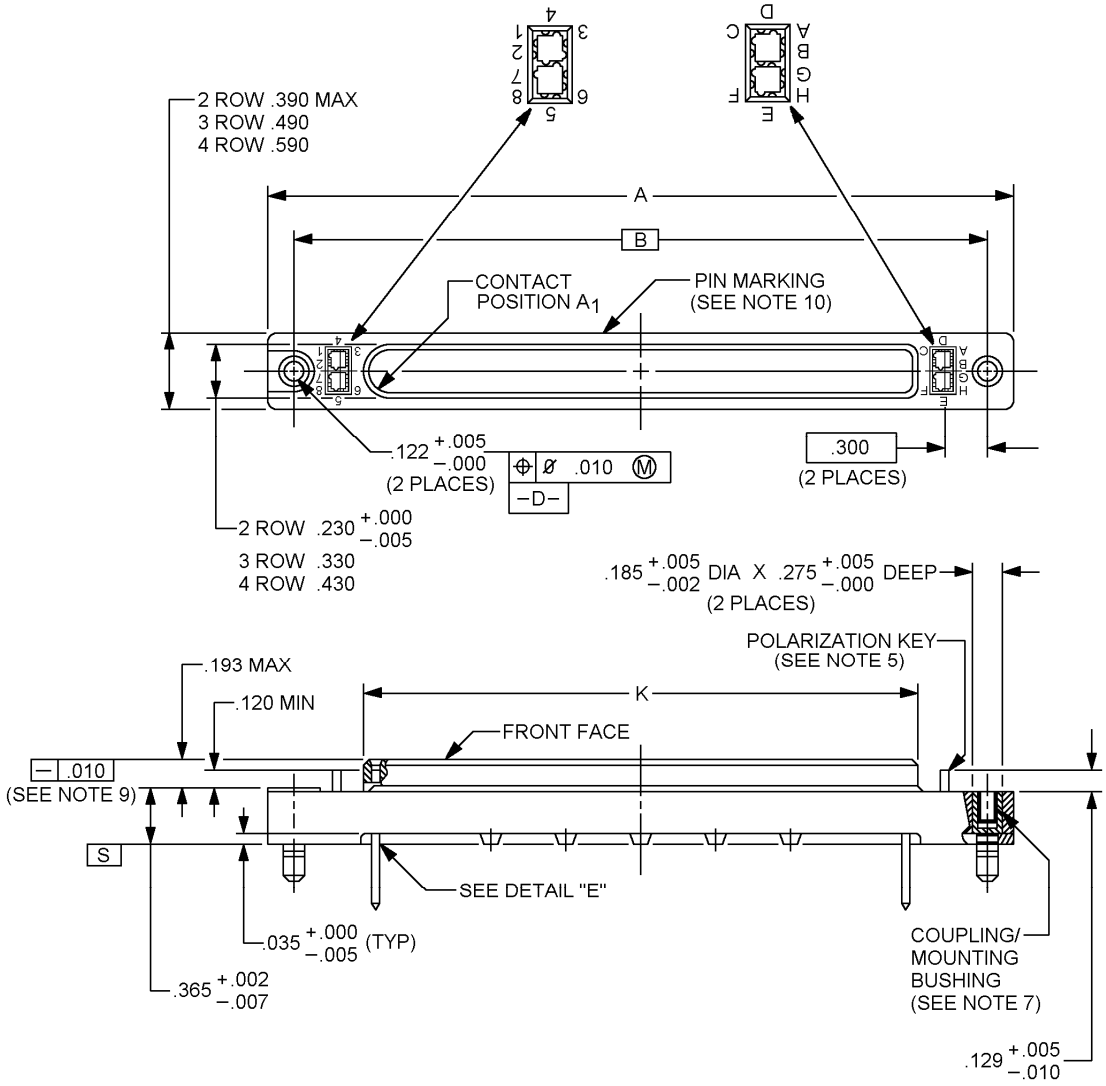



FIGURE 1. Connector, male brush, straight-through with wrappost termination .100 (2.54 mm) spacing.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

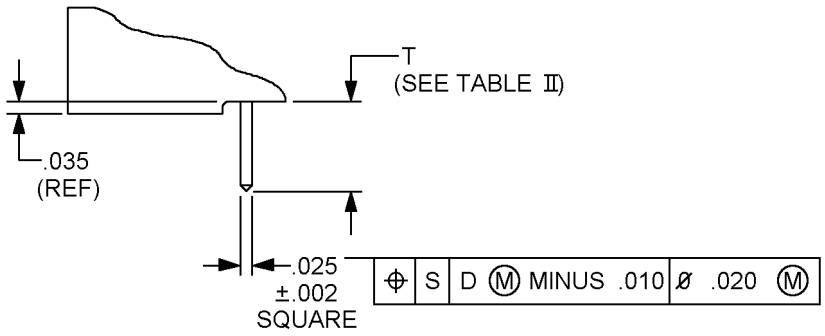


DETAIL "E"

| Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|
| .002 | 0.05 | .035 | 0.89 | .193 | 4.90 | .365 | 9.27 |
| .005 | 0.13 | .112 | 2.84 | .200 | 5.08 | .390 | 9.91 |
| .007 | 0.18 | .120 | 3.04 | .230 | 5.84 | .430 | 10.92 |
| .010 | 0.25 | .122 | 3.10 | .275 | 6.98 | .490 | 12.45 |
| .020 | 0.51 | .129 | 3.28 | .300 | 7.62 | .590 | 14.99 |
| .025 | 0.64 | .185 | 4.70 | .330 | 8.38 | | |


NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .010 (0.25 mm).
4. These connectors mate with connectors specified in MIL-DTL-55302/169 and MIL-DTL-55302/170 and are primarily for use with single-sided, double-sided, or multilayered printed wiring boards.
5. The polarization feature, utilizing four M55302/78-02 polarizing keys which are not supplied with the connector, will provide 256 unique polarizing positions.
6. For dimensions A through K, see table I.
7. Coupling/mounting bushings are not supplied with the connector. See M55302/172-01 and –02.
8. Contact rows are identified by molded letters on the front and rear face. Numbers indicating every fifth contact per row appear on rear face, except for arrangements consisting of 10 contacts per row which lack numerals. Up to 9 contact locations at the high numeral end of the contact row will not be identified.
9. Perfect form at MMC not required. Dimension for user installation purposes only.
10. Part or Identifying Number (PIN).

FIGURE 1. Connector, male brush, straight-through with wrappost termination .100 (2.54 mm) spacing – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

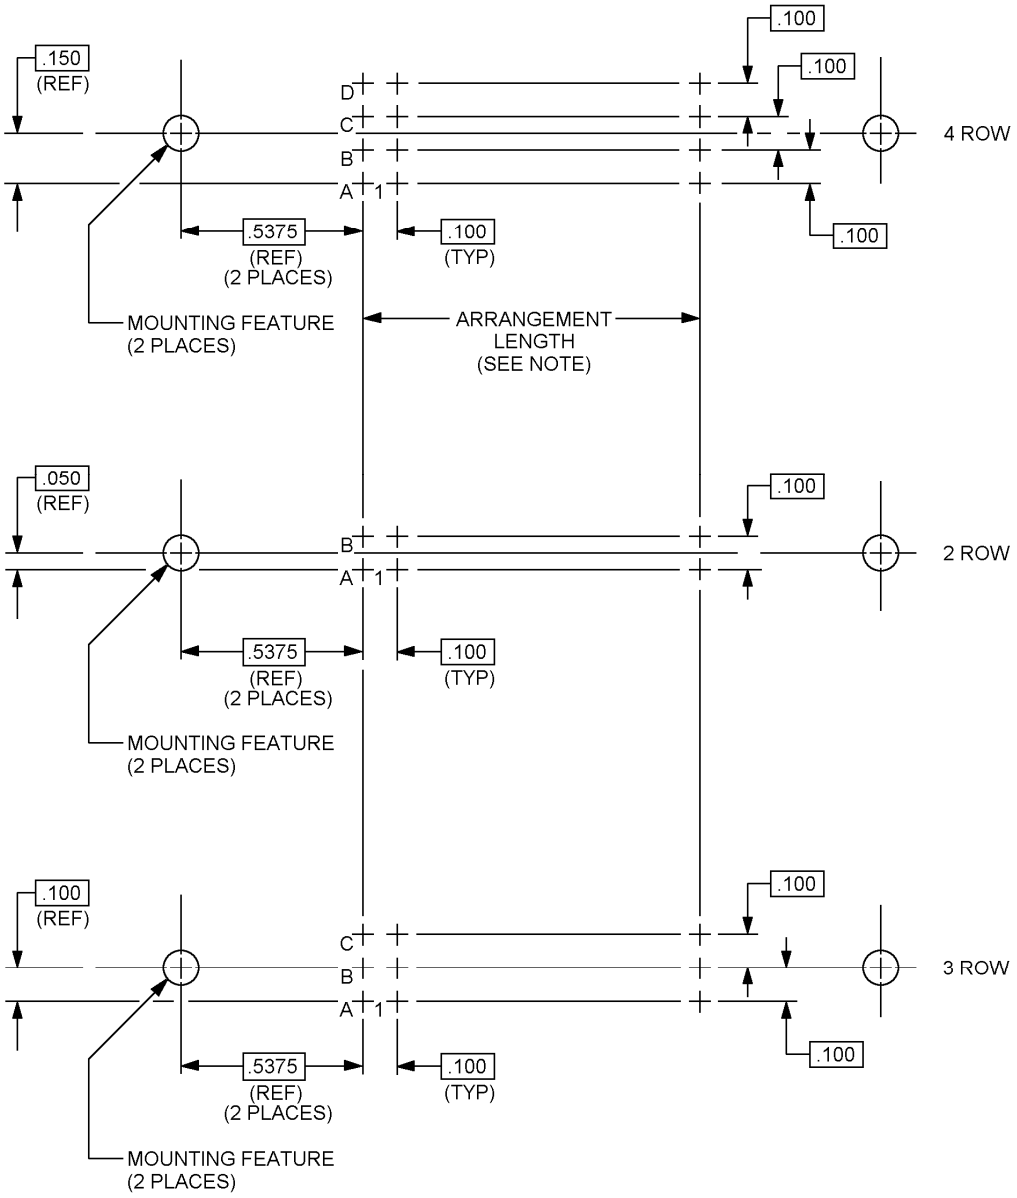


| Inches | mm |
|---|---|
| .050 | 1.27 |
| .100 | 2.54 |
| .150 | 3.81 |
| .5375 | 13.65 |

NOTE:

The arrangement length is determined by (N-1) x.100, where N is the number of contacts per row. Example: For 60 contact row would be (60-1) x.100 = 5.90 inches.

FIGURE 2. Insert arrangement for .100 (2.54 mm) contact spacing, male brush connectors (engaging face).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figures 1 and 2 and tables I and II.

Contacts: Each contact shall contain 7 brush wires with a tolerance limit of ± 1. Each brush wire diameter shall be .0073 to .0085 inch (0.185 mm to 0.216 mm).

Material:

Body: Glass filled thermoplastic molding material in accordance with ASTM D5948, type GPT-15F.

Contacts: In accordance with MIL-DTL-55302, ASTM B187 or ASTM B272.

Plating: The contact termination plating shall be in accordance with table III. Brush wire plating shall be gold in accordance with ASTM B488, type II, code C, class 1.27 over nickel in accordance with SAE-AMS-QQ-N-290. Cut ends or brush wires need not be plated.

Contact identification: See figure 1 (note 8) and figure 2.

Oversized pin exclusion: Not applicable.

Contact engagement and separation forces: Not applicable, see mating and unmating.

Mating and unmating: The maximum mating and unmating force shall be 1.5 ounces times the total number of contacts.

Contact current rating: The connector may have any combination of current flow and ambient temperature provided the contact or connector temperature does not exceed 125°C. The test current shall be 5 amperes for individually connected contacts and 3 amperes for series wired contacts.

Contact resistance: The average resistance of all contact pairs measured on row A contacts shall not exceed 0.016 ohm, and no individual pair shall have a resistance exceeding 0.020 ohm. To allow for increased terminal lengths, add 0.001 ohm for each contact row beyond row A. The point of measurement shall be the point of terminal exit from the printed wiring board.

Contact retention: 3 pounds per contact minimum when the force is applied in the forward direction. The displacement shall not exceed 0.005 (0.13 mm). The displacement shall be recorded after a 1 pound preload is used to determine the zero displacement reference.

Dielectric withstanding voltage:

Sea level: 1,300 volts rms, 60 Hz, ac.

High altitude: 325 volts rms, 60 Hz, ac.

Extended contact life: Connector shall meet the performance requirements of MIL-DTL-55302, contact life, when subjected to 20,000 insertion and withdrawal cycles during qualification inspection.


Insert arrangement: See figure 2.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

PIN: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example: M55302/167 B 18 Y 2

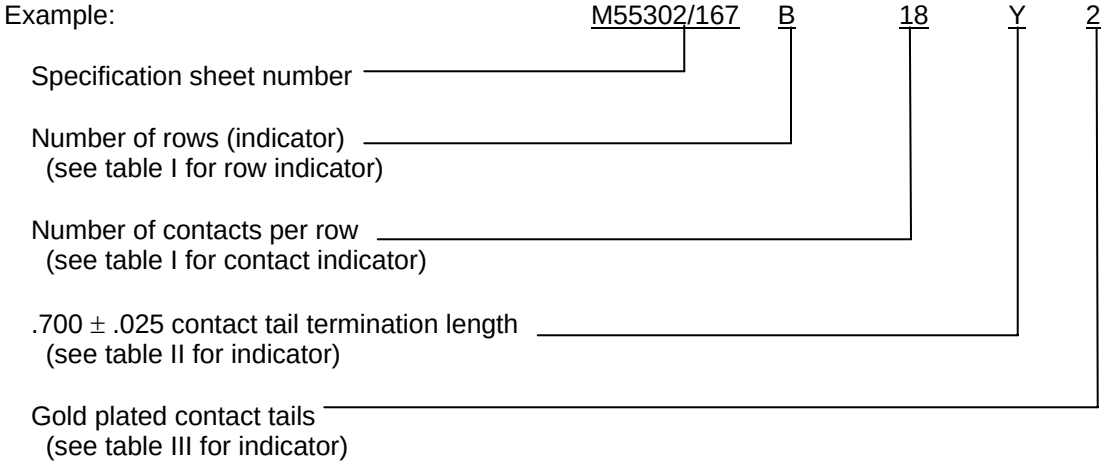


User instructions: Each shipment of connectors shall include, as a minimum, instructions for coupling/mounting bushing usage, polarization key usage and electrical probing information.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Indicators and dimensions.

| 2 Contact rows | | 3 Contact rows | | 4 Contact rows | | Dimensions 1/ | | |
|---|---|---|---|---|---|---|---|---|
| Indicator 2/ | Total contacts | Indicator 2/ | Total contacts | Indicator 2/ | Total contacts | A Max | B | + .004 K - .006 |
| A10 | 20 | B10 | 30 | C10 | 40 | 2.295 (58.29) | 1.975 (50.17) | 1.115 (28.32) |
| A11 | 22 | B11 | 33 | C11 | 44 | 2.396 (60.86) | 2.075 (52.71) | 1.215 (30.86) |
| A12 | 24 | B12 | 36 | C12 | 48 | 2.495 (63.37) | 2.175 (55.25) | 1.315 (33.40) |
| A13 | 26 | B13 | 39 | C13 | 52 | 2.595 (65.91) | 2.275 (57.79) | 1.415 (35.94) |
| A14 | 28 | B14 | 42 | C14 | 56 | 2.695 (68.45) | 2.375 (60.33) | 1.515 (38.48) |
| A15 | 30 | B15 | 45 | C15 | 60 | 2.795 (70.99) | 2.475 (62.87) | 1.615 (41.02) |
| A16 | 32 | B16 | 48 | C16 | 64 | 2.895 (73.53) | 2.575 (65.41) | 1.715 (43.56) |
| A17 | 34 | B17 | 51 | C17 | 68 | 2.995 (76.07) | 2.675 (67.95) | 1.815 (46.10) |
| A18 | 36 | B18 | 54 | C18 | 72 | 3.095 (78.61) | 2.775 (70.49) | 1.915 (48.64) |
| A19 | 38 | B19 | 57 | C19 | 76 | 3.195 (81.15) | 2.875 (73.03) | 2.015 (51.18) |
| A20 | 40 | B20 | 60 | C20 | 80 | 3.295 (83.69) | 2.975 (75.57) | 2.115 (53.72) |
| A21 | 42 | B21 | 63 | C21 | 84 | 3.395 (86.23) | 3.075 (78.11) | 2.215 (56.26) |
| A22 | 44 | B22 | 66 | C22 | 88 | 3.495 (88.77) | 3.175 (80.65) | 2.315 (58.80) |
| A23 | 46 | B23 | 69 | C23 | 92 | 3.595 (91.31) | 3.275 (83.19) | 2.415 (61.34) |
| A24 | 48 | B24 | 72 | C24 | 96 | 3.695 (93.85) | 3.375 (85.73) | 2.515 (63.88) |
| A25 | 50 | B25 | 75 | C25 | 100 | 3.795 (96.39) | 3.475 (88.27) | 2.615 (66.42) |
| A26 | 52 | B26 | 78 | C26 | 104 | 3.895 (98.93) | 3.575 (90.81) | 2.715 (68.96) |
| A27 | 54 | B27 | 81 | C27 | 108 | 3.995 (101.47) | 3.675 (93.35) | 2.815 (71.50) |
| A28 | 56 | B28 | 84 | C28 | 112 | 4.095 (104.01) | 3.775 (95.89) | 2.915 (74.04) |
| A29 | 58 | B29 | 87 | C29 | 116 | 4.195 (106.55) | 3.875 (98.43) | 3.015 (76.58) |
| A30 | 60 | B30 | 90 | C30 | 120 | 4.295 (109.09) | 3.975 (100.97) | 3.115 (79.12) |
| A31 | 62 | B31 | 93 | C31 | 124 | 4.395 (111.63) | 4.075 (103.51) | 3.215 (81.66) |
| A32 | 64 | B32 | 96 | C32 | 128 | 4.495 (114.17) | 4.175 (106.05) | 3.315 (84.20) |
| A33 | 66 | B33 | 99 | C33 | 132 | 4.595 (116.71) | 4.275 (108.59) | 3.415 (86.74) |
| A34 | 68 | B34 | 102 | C34 | 136 | 4.695 119.25 | 4.375 (111.13) | 3.515 (89.28) |
| A35 | 70 | B35 | 105 | C35 | 140 | 4.795 (121.79) | 4.475 (113.67) | 3.615 (91.82) |
| A36 | 72 | B36 | 108 | C36 | 144 | 4.895 (124.33) | 4.575 (116.21) | 3.715 (94.36) |
| A37 | 74 | B37 | 111 | C37 | 148 | 4.995 (126.87) | 4.675 (118.75) | 3.815 (96.90) |
| A38 | 76 | B38 | 114 | C38 | 152 | 5.095 (129.41) | 4.775 (121.29) | 3.915 (99.44) |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Indicators and dimensions – Continued.

| 2 Contact rows | | 3 Contact rows | | 4 Contact rows | | Dimensions 1/ | | |
|---|---|---|---|---|---|---|---|---|
| Indicator 2/ | Total contacts | Indicator 2/ | Total contacts | Indicator 2/ | Total contacts | A Max | B | + .004 K - .006 |
| A39 | 78 | B39 | 117 | C39 | 156 | 5.195 (131.95) | 4.875 (123.83) | 4.015 (101.98) |
| A40 | 80 | B40 | 120 | C40 | 160 | 5.295 (134.49) | 4.975 (126.37) | 4.115 (104.52) |
| A42 | 82 | B41 | 123 | C41 | 164 | 5.395 (137.03) | 5.075 (128.91) | 4.215 (107.06) |
| A42 | 84 | B42 | 126 | C42 | 168 | 5.495 (139.57) | 5.175 (131.45) | 4.315 (109.60) |
| A43 | 86 | B43 | 129 | C43 | 172 | 5.595 (142.11) | 5.275 (133.99) | 4.415 (112.14) |
| A44 | 88 | B44 | 132 | C44 | 176 | 5.695 (144.65) | 5.375 (136.53) | 4.515 (114.68) |
| A45 | 90 | B45 | 135 | C45 | 180 | 5.795 (147.19) | 5.475 (139.07) | 4.615 (117.22) |
| A46 | 92 | B46 | 138 | C46 | 184 | 5.895 (149.73) | 5.575 (141.61) | 4.715 (119.76) |
| A47 | 94 | B47 | 141 | C47 | 188 | 5.995 (152.27) | 5.675 (144.15) | 4.815 (122.30) |
| A48 | 96 | B48 | 144 | C48 | 192 | 6.095 (154.81) | 5.775 (146.69) | 4.915 (124.84) |
| A49 | 98 | B49 | 147 | C49 | 196 | 6.195 (157.35) | 5.875 (149.23) | 5.015 (127.38) |
| A50 | 100 | B50 | 150 | C50 | 200 | 6.295 (159.89) | 5.975 (151.77) | 5.115 (129.92) |
| A51 | 102 | B51 | 153 | C51 | 204 | 6.395 (162.43) | 6.075 (154.31) | 5.215 (132.46) |
| A52 | 104 | B52 | 156 | C52 | 208 | 6.495 (164.97) | 6.175 (156.85) | 5.315 (135.00) |
| A53 | 106 | B53 | 159 | C53 | 212 | 6.595 (167.51) | 6.275 (159.39) | 5.415 (137.54) |
| A54 | 108 | B54 | 162 | C54 | 216 | 6.695 (170.05) | 6.375 (161.93) | 5.515 (140.08) |
| A55 | 110 | B55 | 165 | C55 | 220 | 6.795 (172.59) | 6.475 (164.47) | 5.615 (142.62) |
| A56 | 112 | B56 | 168 | C56 | 224 | 6.895 (175.13) | 6.575 (167.01) | 5.715 (145.16) |
| A57 | 114 | B57 | 171 | C57 | 228 | 6.995 (177.67) | 6.675 (169.55) | 5.815 (147.70) |
| A58 | 116 | B58 | 174 | C58 | 232 | 7.095 (180.21) | 6.775 (172.09) | 5.915 (150.24) |
| A59 | 118 | B59 | 177 | C59 | 236 | 7.195 (182.75) | 6.875 (174.63) | 6.015 (152.78) |
| A60 | 120 | B60 | 180 | C60 | 240 | 7.295 (185.29) | 6.975 (177.17) | 6.115 (155.32) |
| A61 | 122 | B61 | 183 | C61 | 244 | 7.395 (187.83) | 7.075 (179.71) | 6.215 (157.86) |
| A62 | 124 | B62 | 186 | C62 | 248 | 7.495 (190.37) | 7.175 (182.25) | 6.315 (160.40) |
| A63 | 126 | B63 | 189 | C63 | 252 | 7.595 (192.91) | 7.275 (184.79) | 6.415 (162.94) |
| A64 | 128 | B64 | 192 | C64 | 256 | 7.695 (195.45) | 7.375 (187.33) | 6.515 (165.48) |
| A65 | 130 | B65 | 195 | C65 | 260 | 7.795 (197.99) | 7.475 (189.87) | 6.615 (168.02) |
| A66 | 132 | B66 | 198 | C66 | 264 | 7.895 (200.53) | 7.575 (192.41) | 6.715 (170.56) |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Indicators and dimensions – Continued.

| 2 Contact rows | | 3 Contact rows | | 4 Contact rows | | Dimensions 1/ | | |
|---|---|---|---|---|---|---|---|---|
| Indicator 2/ | Total contacts | Indicator 2/ | Total contacts | Indicator 2/ | Total contacts | A Max | B | + .004 K - .006 |
| A67 | 134 | B67 | 201 | C67 | 268 | 7.995 (203.07) | 7.675 (194.95) | 6.815 (173.10) |
| A68 | 136 | B68 | 204 | C68 | 272 | 8.095 (205.61) | 7.775 (197.49) | 6.915 (175.64) |
| A69 | 138 | B69 | 207 | C69 | 276 | 8.195 (208.15) | 7.875 (200.03) | 7.015 (178.18) |
| A70 | 140 | B70 | 210 | C70 | 280 | 8.295 (210.69) | 7.975 (202.57) | 7.115 (180.72) |
| A71 | 142 | B71 | 213 | C71 | 284 | 8.395 (213.23) | 8.075 (205.11) | 7.215 (183.26) |
| A72 | 144 | B72 | 216 | C72 | 288 | 8.495 (215.77) | 8.175 (207.65) | 7.315 (185.80) |
| A73 | 146 | B73 | 219 | C73 | 292 | 8.595 (218.31) | 8.275 (210.19) | 7.415 (188.34) |
| A74 | 148 | B74 | 222 | C74 | 296 | 8.695 (220.85) | 8.375 (212.73) | 7.515 (190.88) |
| A75 | 150 | B75 | 225 | C75 | 300 | 8.795 (223.39) | 8.475 (215.27) | 7.615 (193.42) |
| A76 | 152 | B76 | 228 | C76 | 304 | 8.895 (225.93) | 8.575 (217.81) | 7.715 (195.96) |
| A77 | 154 | B77 | 231 | C77 | 308 | 8.995 (228.47) | 8.675 (220.35) | 7.815 (198.50) |
| A78 | 156 | B78 | 234 | C78 | 312 | 9.095 (223.10) | 8.775 (222.89) | 7.915 (201.04) |
| A79 | 158 | B79 | 237 | C79 | 316 | 9.195 (233.55) | 8.875 (225.43) | 8.015 (203.58) |
| A80 | 160 | B80 | 240 | C80 | 320 | 9.295 (236.09) | 8.975 (227.97) | 8.115 (206.12) |
| A81 | 162 | B81 | 243 | C81 | 324 | 9.395 (238.63) | 9.075 (230.51) | 8.215 (208.66) |
| A82 | 164 | B82 | 246 | C82 | 328 | 9.495 (241.17) | 9.175 (233.05) | 8.315 (211.20) |
| A83 | 166 | B83 | 249 | C83 | 332 | 9.595 (243.71) | 9.275 (235.59) | 8.415 (213.74) |
| A84 | 168 | B84 | 252 | C84 | 336 | 9.695 (246.25) | 9.375 (238.13) | 8.515 (216.28) |
| A85 | 170 | B85 | 255 | C85 | 340 | 9.795 (248.79) | 9.475 (240.67) | 8.615 (218.82) |

See footnotes at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

TABLE I. Indicators and dimensions - Continued.

| 2 Contact rows | | 3 Contact rows | | 4 Contact rows | | Dimensions 1/ | | |
|---|---|---|---|---|---|---|---|---|
| Indicator 2/ | Total contacts | Indicator 2/ | Total contacts | Indicator 2/ | Total contacts | A Max | B | + .004 K - .006 |
| A86 | 172 | B86 | 258 | C86 | 344 | 9.895 (251.33) | 9.575 (243.21) | 8.715 (221.36) |
| A87 | 174 | B87 | 261 | C87 | 348 | 9.995 (253.87) | 9.675 (245.75) | 8.815 (223.90) |
| A88 | 176 | B88 | 264 | C88 | 352 | 10.095 (256.41) | 9.775 (248.29) | 8.915 (226.44) |
| A89 | 178 | B89 | 267 | C89 | 356 | 10.195 (258.95) | 9.875 (250.83) | 9.015 (228.98) |
| A90 | 180 | B90 | 270 | C90 | 360 | 10.295 (261.49) | 9.975 (253.37) | 9.115 (231.53) |
| A91 | 182 | B91 | 273 | C91 | 364 | 10.395 (264.03) | 10.075 (255.91) | 9.215 (234.06) |
| A92 | 184 | B92 | 276 | C92 | 368 | 10.495 (266.57) | 10.175 (258.45) | 9.315 (236.60) |
| A93 | 186 | B93 | 279 | C93 | 372 | 10.595 (269.11) | 10.275 (260.99) | 9.415 (239.14) |
| A94 | 188 | B94 | 282 | C94 | 376 | 10.695 (271.65) | 10.375 (263.53) | 9.515 (241.68) |
| A95 | 190 | B95 | 285 | C95 | 380 | 10.795 (274.19) | 10.475 (266.07) | 9.615 (244.22) |
| A96 | 192 | B96 | 288 | C96 | 384 | 10.895 (276.73) | 10.575 (268.61) | 9.715 (246.76) |
| A97 | 194 | B97 | 291 | C97 | 388 | 10.995 (279.27) | 10.675 (271.15) | 9.815 (249.30) |
| A98 | 196 | B98 | 294 | C98 | 392 | 11.095 (281.81) | 10.775 (273.69) | 9.915 (251.84) |
| A99 | 198 | B99 | 297 | C99 | 396 | 11.195 (284.35) | 10.875 (276.23) | 10.015 (254.38) |
| A00 | 200 | B00 | 300 | C00 | 400 | 11.295 (286.89) | 10.975 (278.77) | 10.115 (256.92) |

1/ Dimensions are in inches. Metric equivalents are given for general information only.
2/ Indicators consist of, a letter designating number of contact rows and two digits indicating number of contacts per row. Indicators A00, B00, and C00 denotes 100 contacts per row.

TABLE II. Contact tail termination length.

| Indicator | T dimension |
|---|---|
| Z | .542 ± .025 |
| Y | .700 ± .025 |

TABLE III. Contact tail plating.

| Indicator | Plating |
|---|---|
| 1 | Tin lead in accordance with SAE-AMS-P-81728, 50 to 70 percent tin, .0001 minimum thick over copper in accordance with SAE-AMS2418 |
| 2 | Gold in accordance with ASTM B488, type II, code C, class 0.51 over nickel in accordance with SAE-AMS-QQ-N-290 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/169
MIL-DTL-55302/170
ASTM B187
ASTM B272
ASTM B488
ASTM D5948
SAE-AMS2418
SAE-AMS-QQ-N-290
SAE-AMS-P-81728

CONCLUDING MATERIAL

Custodians:
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4454-000)

Review activities:
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:55Z
Check the source to verify that this is the current version before use.