
MILITARY SPECIFICATION SHEET

ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY
(BETWEEN SERIES BNC TO SERIES TNC), CLASS 2, STRAIGHT PLUG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the connector adapter described herein shall consist of this document and the latest issue of Specification MIL-A-55339

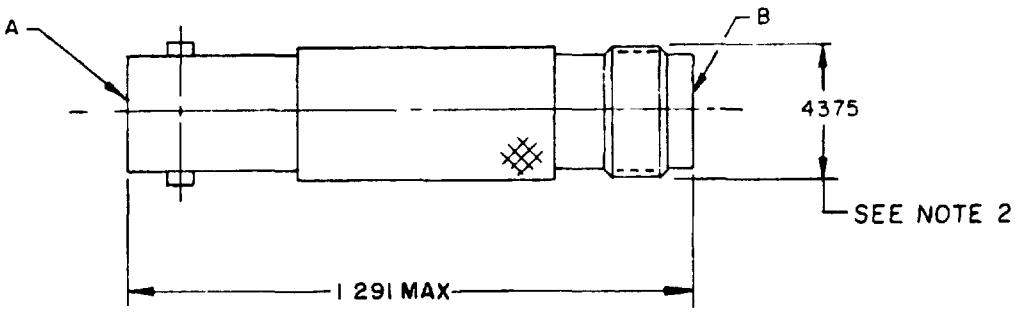

Reference	Series	Contact	Figure
A	BNC	Socket	2
B	TNC	Socket	3


INCHES	MM
.381	9.68
.382	9.70
.4375	11.11
1.291	32.79

NOTES
1. Dimensions are in inches.
2. This dimension is the largest overall diameter of the connector.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 1. General configuration.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

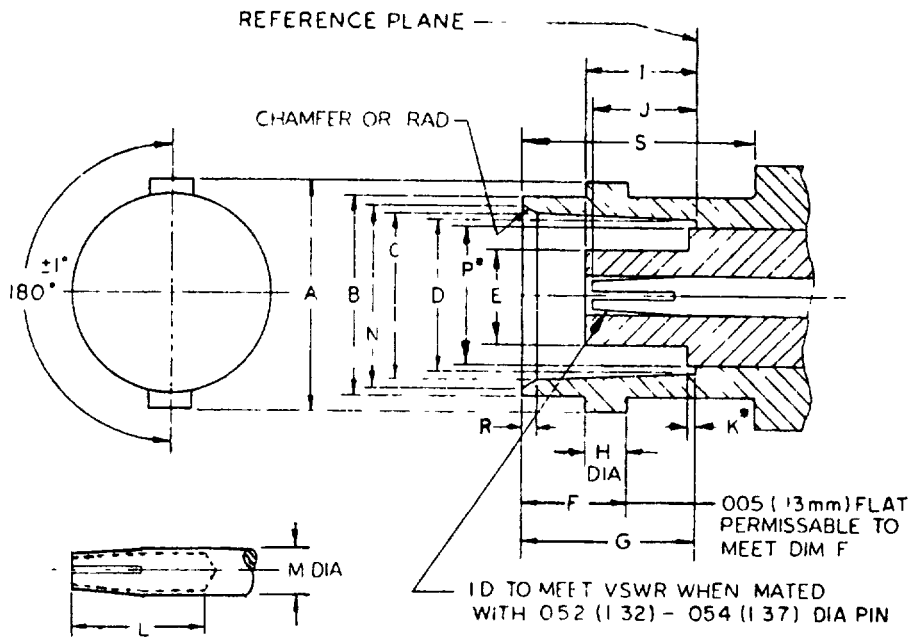


Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
A	.432 (10.97)	.436 (11.07)
B	.378 (9.60)	.382 (9.70)
C	.327 (8.31)	.333 (8.46)
D	.319 (8.10)	.321 (8.15)
E		.186 (4.72)
F	.204 (5.18)	.208 (5.28)
G	.327 (8.31)	.335 (8.51)
H	.075 (1.91)	.081 (2.06)
I		.208 (5.28)
J		.206 (5.23)
K*		.006 (.15)
L	.195 (4.95)	
M	.081 (2.06)	.087 (2.21)
N	.346 (8.79)	.356 (9.04)
P*		.256 (6.50)
R	.015 (.38)	.030 (.76)
S	.414 (10.52)	

P dimension applies to that portion (if applicable) of dielectric which extends beyond reference plane by dimension K


NOTES
1. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
2. Concave depression .100 (2.54 mm) X .005 (.13 mm) deep between studs permissible

FIGURE 2 Mating dimensions for socket terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

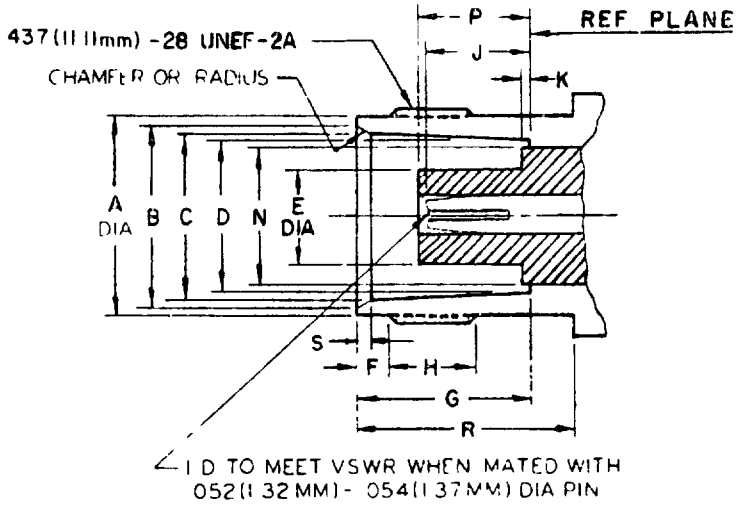

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses (see note)		
	Minimum		Maximum
A	.378	(9.60)	.381 (9.68)
B	.345	(8.76)	.356 (9.04)
C	.327	(8.31)	.333 (8.46)
D	.319	(8.10)	.321 (8 15)
E			.186 (4.72)
F	.068	(1.73)	.088 (2.24)
G	.329	(8.36)	.333 (8.46)
H	.187	(4.75)	
J	186	(4 72)	.206 (5.23)
K			.006 (.15)
L	.195	(4.95)	
M	.081	(2.06)	.087 (2.21)
N			.256 (6.50)
P	188	(4 78)	.208 (5.28)
R	.415	(10.56)	
S	.015	(.38)	.030 (.76)



*N dimension applies to that portion (if applicable) of the dielectric which pro trudes beyond the metal shoulder (or reference plane) by dimension K

NOTES
1 Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
2 All undimensioned pictorial configurations are for reference purposes only

FIGURE 3. Mating dimensions for socket terminations

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nom.

Working voltage: Sea level - 500 Vrms.
70,000 feet - 125 Vrms.

Frequency range: 0 to 4 GHz.

Temperature range. -65° to +165°C.

PERFORMANCE (installation torque is not applicable).

Dimensions: See figures 1, 2, and 3.

Center contact retention: Axial force - 6 lb, min. series BNC and TNC
Torque - Not applicable

Force to engage and disengage:	Series BNC	Series TNC
Longitudinal force -	3	Not applicable
Torque - (in. lb, max) -	2.5	2

Mating characteristics
Center contact (socket):
Oversize test pin dia - .057 in , min
Insertion depth - .125 in , min.
No. of insertions - 1.
Max test pin (insertion force test)
Steel test pin dia - .054 in , min
Pin finish - 16 microinches.
Insertion force - 2 lb, max.
No. of insertions - 1.
Min test pin (withdrawal force)
Steel test pin dia - .052 in., max
Pin finish - 16 microinches.
Withdrawal force - 2 oz, min
No. of withdrawals - 1

Permeability: <2 0

Seal.
Pressurized - Not applicable
Weatherproof - Not applicable

Insulation resistance: 5,000 megohms, min.

VSWR: 1:25 1, max at .5 to 4 GHz.

RF leakage (total). -55 dB, min, 3 GHz)

RF insertion loss .2 dB, max, 3 GHz
(.115 $\sqrt{F\ (GHz)}$ dB max tested at 3 GHz).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

Durability 500 cycles minimum at 12 cycles/min maximum The connector shall meet the mating characteristics and force to engage and disengage requirements.

Dielectric withstanding Test voltage - 1,500 Vrms, min (sea level).

Contact resistance (milliohms, max):

Contact	Initial	After
Center	2.0	2.5
Outer	0.2	Not applicable

Vibration, high frequency: Interruptions - 1 µs, max.

Shock. Test condition I.

Thermal shock: Test condition C

Moisture resistance 200 megohms, min.

Corona level: Voltage - 375 V, min.
Altitude - 70,000 feet, min

RF high potential withstanding voltage: RF voltage - 1,000 Vrms, min.
Frequency - 5 MHz, min.

Salt spray (corrosion): Test condition B

MARKING As specified in MIL-A-55339
Part No. M55339/37-00001

Custodians
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MU, MI, EL, AT
Navy - SH
Air Force - 11, 99
DSA - ES

User activities:
Army - AT, MU
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - EL

Agent
DSA - ES

(Project 5935-2017-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-A-55339/37 ADAPTER, CONNECTOR, COAXIAL, RADIO FREQUENCY (BETWEEN SERIES BNC TO SERIES TNC), CLASS 2, STRAIGHT PLUG

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMPER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: ~~AMSEL~~ DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:07Z
Check the source to verify that this is the current version before use.