INCH-POUND
MIL-T-48466B(AR)
09 November 1993
(see 6.4)

MILITARY SPECIFICATION

TEST SET, CABLE, XM21 COMPUTER - AN/VVG-2 RANGEFINDER - AN/VSG-2 TANK THERMAL SIGHT - 11733300

This specification is approved for use by the U.S. Army Armament, Munitions and Chemical Command (AMCCOM) and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the performance, design, test, manufacture, and acceptance requirements for the Test Set, Cable, XM21 Computer - AN/VVG-2 Rangefinder - AN/VSG-2 Tank Thermal Sight - 11733300 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-P-13926 - Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-I-45607 - Inspection Equipment; Acquisition, Maintenance, and Disposition of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
FSC 4931

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-100	Engineering Drawing Practices
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods
MIL-STD-2000	Standard Requirements for Soldered Electrical and Electronic Assemblies
MIL-STD-2073-1	Procedures for Development and Application of Packaging Requirements
MIL-STD-45662	Calibration System Requirements

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: DODSSP - Customer Service, Standardization Documents Order Desk, 700 Robbins Avenue, Bldg 4D, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issue shall be those in effect on date of the solicitation.

Us. Army Armament Research Development and Engineering Center (ARDEC)

DRAWINGS (see 6.6)

11732468	Cable, Power
11732469	Cable, Ammo Select
11732556	Connector, Shorting
11732558	Cable, Power
11733300	Cable, Test Set
11747425	Cable, Interconnection
11747426	Cable, Interconnection
11747427	Cable, Interconnection
11747428	Cable , Interconnection
11747429	Connector, Shorting (CP52)
11747430	Connector, Shorting (CP53)
11747431	Connector, Shorting (CP62)
11747432	Connector, Shorting (CP55)
11747433	Connector, Shorting (CP54)
11747434	Connector, Shorting (CP64)
PS11733300	Packaging of Test Set, Cable

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:27Z
Check the source to verify that this is the current version before use.

(Copies of Government drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between t-he text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item definition. The Cable Test Set, herein referred to as the assembly, is a portable unit used to test Ballistic Computer, Laser Rangefinder and Tank Thermal Sight Cables by detecting open and short-cd conductors in t-he cables.

3.1.1 Major components list. The assembly consists of the following major components, all of which are covered by this specification.

Name	Drawing Number
Cable, Power	11732468
Cable, Ammo Select	11732469
Connector, Shorting	11732556
Cable, Power	11732558
Cable, Test Set	11733300
Cable, Interconnect ion	11747425
Cable, Interconnection	11747426
Cable, Interconnection	11747427
Cable, Interconnection	11747428
Connector, Shorting (CP52)	11747429
Connector, Shorting (CP53)	11747430
Connector, Shorting (CP63)	11747431
Connector, Shorting (CP55)	11747432
Connector, Shorting (CP54)	11747433
Connector, Shorting (CP64)	11747434

3.1.2 General specifications. (see 4.6.4)

3.1.2.1 Manufacture and inspection. The following provisions of MIL-F-13926 apply:

a. Dimensions and tolerances
b. Effect of protective coating on dimensions (Inorganic type coatings)
c. Part identification and marking
d. Workmanship (including applicable port-ions of MIL-STD-2000 and MIL-STD-454, Requirement 9)

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

3.1.2.2 Standards of manufacture.

3.1.2.2.1 Assembly and soldering. The requirements of MIL-STD-2000 shall apply, as a minimum.

3.1.2.2.2 Interchangeability. The assembly shall be manufactured in accordance with interchangeability requirements as specified in MIL-STD-100.

3.2 First article. When specified in the contract or purchase order (see 6.3) the contractor shall furnish sample units for first article inspection and approval (see 4.4).

3.3 Characteristics.

3.3.1 Performance. Unless otherwise specified, the assembly shall meet the performance requirements specified herein under the following conditions:

Input power	24 ± 6.0 volt direct current (v dc) 10 ampere (amp) maximum (J2-A (t) with return to J2-B and J2-C)
Temperature	73 ± 18 degrees Fahrenheit (°F)
Pressure	28.5 +2.0 inches mercury −4.5 inches mercury
Humidity	50 ± 30 percent (%)

3.3.1.1 Cable test set switch/indicators.

3.3.1.1.1 Powerswitch/indicatior. With input power applied, the power indicator lamp shall illuminate when the power switch is in the 'ON' position.

3.3.1.1.2 Continuity switch/indicator. With input power applied and the power switch on, the continuity indicator lamp shall be illuminated when the continuity switch is depressed.

3.3.1.1.3 Cable test switches. With input power applied, and the power switch on, each cable test switch shall be able to detect open or short circuits within the computer subsystem, the laser subsystem and the Tank Thermal Sight Subsystem Cables.

3.3. 1.1.3.1 Short–circuit detection. With input power applied, the power switch on, and each panel switch (S1 through S83) in turn set to the test position, the continuity indicator lamp shall not light (An illuminated continuity indicator lamp indicates a short between conductors).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.3.1.1.3.2 Open circuit detection. With input power applied, the power switch on, panel switches S1 through S83 in the normal position, and pins 1 through 83 on connector 15J1 successively grounded, the continuity lamp shall not light. The continuity lamp shall light under the above conditions when switches S1 through S83 are individually set to the test position setting of each panel switch (A failure to illuminate the continuity lamp shall indicate an open conductor).

3.3.1.1.4 Interlock test switch indicator. with input power applied, the power switch on, and pins 84 and 85 of 15J1 connected, the interlock test switch indicator lamp will be illuminated. When the interlock test switch is depressed the indicator lamp will be extinguished.

3.3.1.1.5 Input power . The assembly shall operate over an input power range of 18 to 30V dc.

3.3.1.2 Insulation resistance. All insulation between ungrounded circuits and ground, and between isolated circuits shall have a minimum resistance of 10 megohms with 500V dc applied.

3.3.1.3 Dielectric strength. The dielectric strength of t-he electrical wiring within the assembly shall withstand 2000 volt root mean square (V rms) at a frequency of 60 Hertz (Hz) for a period not less than 5 seconds.

3.3.1.4 Fungus resistance. All nonmetallic materials shall be inherently fungistatic or treated to resist fungus growth except when used for components of potted or otherwise moisture sealed assemblies.

3.3.2 Physical characteristics.

3.2.2.1 Physical characteristics. The assembly shall be in accordance with Drawing 11733300 and drawings referenced therein.

3.3.2.2 Power cables. Power cables shall be in accordance with drawings 11732468 and 11732558.

3.3.2.3 Test interconnection cables. Cables used to interconnect the assembly with computer, rangefinder and Tank Thermal Sight Cables shall be in accordance with drawings 11747425, 11747426, 11747427 and 11747428.

3.3.2.4 Ammo select cable. The ammo select cable shall be in accordance with drawing 11742469.

3.3.2.5 Shorting connectors. The shorting connectors, used to complete test circuits, shall be in accordance with drawings 11732556, 11747429, 11747430, 11747431, 11747432, 11747433 and 11747434.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.3.3 Environmental conditions. The assembly shall meet the requirements of 3.3.1 after being subjected to the environmental conditions specified herein.

3.3.3.1 Waterproofness. The assembly shall withstand a pressure difference of 1.5 pounds per square inch (psi) for two minutes without evidence of leakage, with the internal less than t-he external pressure.

3.3.3.2 Temperature. The assembly shall be capable of operating as specified herein over the operating temperature range of -25°F to 125°F and shall not be damaged when subjected to storage conditions ranging from -65°F to 160°F.

3.3.3.3 Vibration. The assembly shall be capable of withstanding a sinusoidal vibration displacement of 0.03 inch double amplitude, 10-55 Hz, for a period of 80 minutes (including up to 4 resonance dwells of 13-1/3 minutes each) in accordance with figure 1. The assembly shall withstand the vibration environment in each of three mutually perpendicular axes to temperature of 125°F.

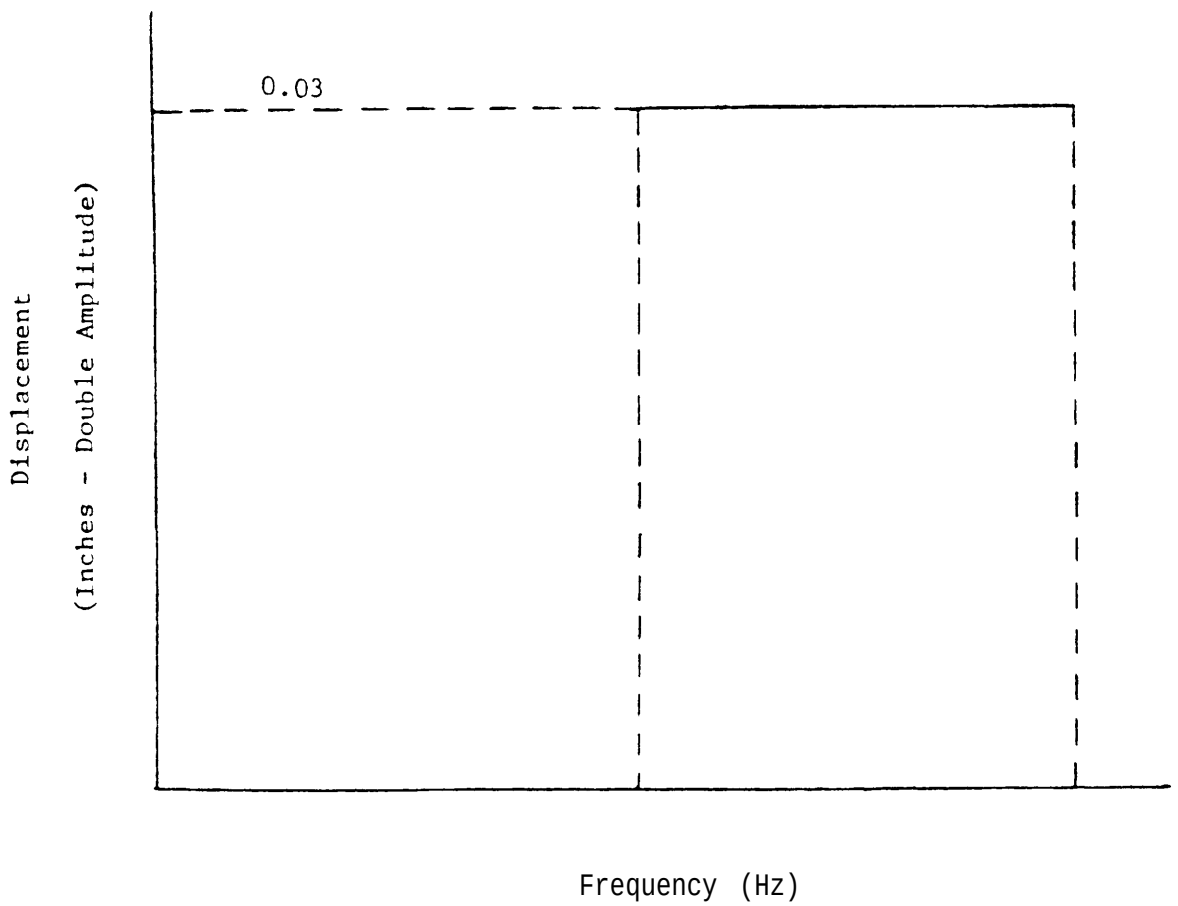


FIGURE 1. Vibration Curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

3.3.3.4 Shock. The assembly shall be capable of withstanding exposure to half sine wave shock pulses of 40 + 4 gravity units (g's) for a duration of 18 ± 3 millisec (msec) in accordance with figure 2. The assembly shall withstand three shock pulses applied in both directions along three mutually perpendicular axes (18 shocks).

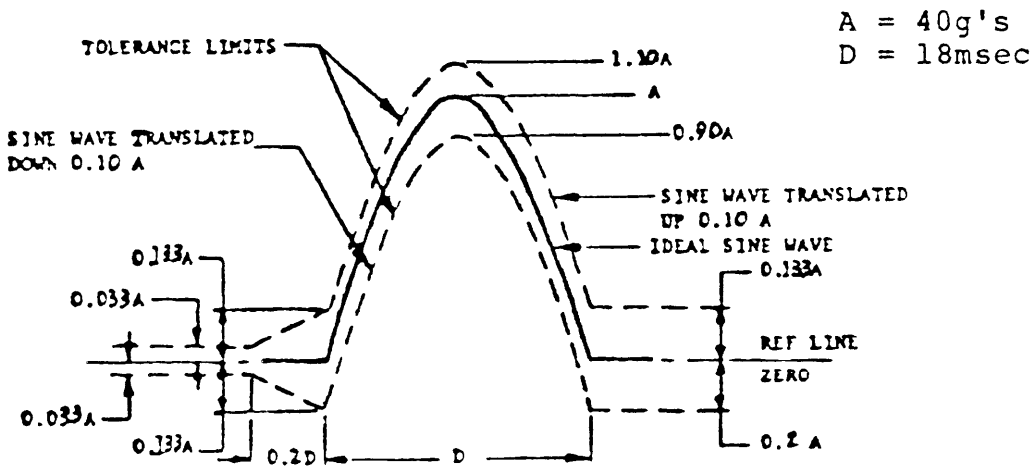


FIGURE 2. Shock Pulse.

3.3.3.5 Loose cargo bounce. The assembly shall be capable of withstanding the vibration normally induced during transport-at ion of loose cargo.

3.3.3.6 Humidity. The assembly shall be capable of being operated in relative humidity of up to 100 percent.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirement-s (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government . The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in the specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Inspection equipment. Unless otherwise specified in the contract, the contractor shall supply, maintain and calibrate inspection equipment in accordance with the provisions of MIL-I-45607 and MIL-STD-45662. Contractor inspection equipment designs shall be submitted for Government approval as specified in the contract (see 6.5).

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)
b. Quality conformance inspection (see 4.5 and 6.8)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the quality assurance provisions of MIL-F-13926 and the conditions of 3.3.1.

4.4 First article inspection. The requirement for first article approval and the designation of responsibility for first article inspection to either the Government or the contractor shall be specified in the contract (see 6.3).

4.4.1 Sample. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with the provisions of 4.4.2. The first article sample shall consist of two assemblies.

4.4.2 Inspection. Two assembles shall be subjected to all the inspections specified in Tables I, II and III. The examination control tests shall be performed first.

4.4.3 Failure. Failure of any assembly to meet any requirement shall be cause for refusal to grant first article approval. The Government reserves the right to terminate first article inspection upon any failure of any assembly to comply with any stated requirement.

4.4.4 Responsibility. The contractor, whether or not responsible, shall inspect the sample for conformance to all contractual requirements and shall submit a record of this inspection with the sample and certificates of conformance for materials. The Government reserves the right to witness inspections performed by the contractor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

TABLE I. Performance tests.

Item	Characteristics	Requirement	Test Procedure
101	Power Switch/Indicator	3.3.1.1.1	4.6.1.1.1
102	Continuity Switch/Indicator	3.3.1.1.2	4.6.1.1.2
103	Short circuit detection	3.3.1.1.3.1	4.6.1.1.3.1
104	Open circuit detection	3.3.1.1.3.2	4.6.1.1.3.2
105	Interlock test switch indicator	3.3.1.1.4	4.6.1.1.4
106	Input power	3.3.1.1.5	4.6.1.1.5

TABLE II. First article environmental tests.

Item	Characteristics	Requirement	Test Procedure
201	Waterproofness	3.3.3.1	4.6.3.1
202	Temperature	3.3.3.2	4.6.3.2/4.6.3.3
203	Vibration	3.3.3.3	4.6.3.4
204	Shock	3.3.3.4	4.6.3.5
205	Loose cargo bounce	3.3.3.5	4.6.3.6
206	Humidity	3.3.3.6	4.6.3.7
207	Fungus resistance	3.3.1.4	4.6.3.8

TABLE III. Examination control tests.

Item	Characteristics	Requirement	Test Procedure
301	Fabrication	3.1	Applicable drawings - Visual
302	General specifications	3.1.2	4.6.4 - Visual
303	Insulation resistance	3.2.1.2	4.6.1.2
304	Dielectric strength	3.2.1.3	4.6.1.3
305	Physical characteristics	3.3.2	4.6.2 - Visual
306	Packaging inspection	5.1	4.6.5 - Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection.

4.5.1 Performance inspection.

4.5.1.1 Performance sample and tests. Each assembly in every lot shall be subjected to the examinations and tests in Table I and shall be examined visually for completeness, improper assembly and evidence of poor workmanship per items 301 and 302 of Table III. The conditions of 3.3.1 apply.

4.5.1.2 Acceptance. Where any one assembly fails to meet any specified requirement, the defective assembly shall be removed from the lot and resubmitted only after all defects have been corrected.

4.5.2 Examination control inspection.

4.5.2.1 Examination control sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 100 assemblies produced and shall be subjected to the tests in Table III.

4.5.2.2 Acceptante. Where any assembly fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be resubmitted for reinspection only after all assemblies are re-examined or retested and all defective assemblies are removed or defects corrected.

4.5.3 Environmental control inspection.

4.5.3.1 Environmental control sample and tests. One assembly, as a control sample, shall be selected at random by the Government representative from each 50 assemblies produced or from each month’s production, whichever occurs first. The assembly shall be subjected to all the tests in Table IV in the order listed. Combining of tests is not permitted.

TABLE IV. Environmental control tests.

Item	Characteristics	Requirement	Test Procedure
401	High Temperature	3.3.3.2	4.6.3.2
402	Low Temperature	3.3.3.2	4.6.3.3
403	Vibration	3.3.3.3	4.6.3.4
404	Shock	3.3.3.4	4.6.3.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

4.5.3.2 Acceptance. Where any one assembly fails to meet any specified requirement, the lot shall be rejected. Rejected lots shall be resubmit-ted for reinspection only after all assemblies are re-examined or retested and all defective assemblies are removed or defects corrected.

4.6 Methods of inspection.

4.6.1 Performance tests.

4.6.1.1 Cable test set indicators/switches.

4.6.1.1.1 Power switch/indicator. Activate the power switch and observe the power indicator to verify that the lamp illuminates.

4.6.1.1.2 Continuity switch/indicator. Activate the power switch and press and release the continuity switch. Observe the continuity indicator to verify that the indicator lamp illuminates when the continuity switch is depressed and is extinguished when the continuity switch is released.

4.6.1.1.3 Cable test switches.

4.6.1.1.3.1 Short-circuit detection. Activate the power switch and each cable test switch in successive position (S1 through S83). Observe the continuity indicator to verify that the indicator lamp remains off.

4.6.1.1.3.2 Open-circuit detection. Activate the power switch, place panel switches S1 through S83 in the normal position, and successively connect pins 1 through 83 of connector 15J1 to 24V dc return. Observe that the continuity lamp does not light. Place panel switches S1 through S83 in the test position successively (pins 1 through 83 of 15J1 still connected to 24V dc return) and observe the continuity indicator to verify that the indicator lamp illuminates.

4.6.1.1.4 Interlock test switch indicator. Activate the power switch and place a jumper between pins 84 and 85 of connector 15J1. Observe the interlock test switch indicator to verify that the indicator lamp illuminates. Press the interlock test switch and observe that the indicator lamp will extinguish.

4.6.1.1.5 Input power . Perform the performance tests of 4.6.1.1.1 through 4.6.1.1.4 at 18V dc and at 30V dc. All requirements shall be satisfied at both conditions.

4.6.1.2 Insulation resistance. Measure the insulation resistance between pins of connector 15J1 and case in accordance with MIL-STD-202, Method 302, Test Condition B. Verify that the resistance is not less than 10 megohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

4.6.1.3 Dielectric strength. Perform a dielectric strength test between pin 15J2-B and case in accordance with MIL-STD-202, Method 301, using 2000V rms at a frequency of 60 Hz for a period of 10.0 + 1.0 seconds. During this test, verify that the electrical wiring within the assembly shows no evidence of disruptive discharge or leakage current.

4.6.2 Physical characteristics.

4.6.2.1 Physical characteristics of CTS. Visually examine the CTS for conformance to Drawing 11733300 and drawings referenced therein.

4.6.2.2 Power cables. Visually examine the power cables for conformance to Drawings 11732468 and 11732558.

4.6.2.3 Test interconnect-ion cables. Visually examine the test interconnection cables for conformance to Drawings 11747425, 11747426, 11747427 and 11747428, respectively.

4.6.2.4 Ammo select cable. Visually examine the ammo select cable for conformance to Drawing 11732469.

4.6.2.5 Shorting connectors . Visually examine the shorting connectors for conformance to Drawings specified in 3.2.2.5.

4.6.3 Environmental conditions.

4.6.3.1 Waterproofness. Subject the assembly in its normal operating condition to the leakage (immersion) test of MIL-STD-810, Method 512, except submerge the assembly in water at room temperature to develop a pressure differential of 1.5 psi such that the assembly’s internal air pressure is less than the external pressure. Maintain the pressure differential for a two minute period. Verify that there is no leakage. After exposure, subject the assembly to the performance tests of 4.6.1.

4.6.3.2 High temperature. Subject the assembly in its normal operating condition to the high temperature test specified in MIL-STD-810, Method 501, except storage temperature shall be 160°F for 48 hours. At the conclusion of the storage temperature test, stabilize the assembly at 125°F and subject it to the performance tests of 4.6.1.1.1 through 4.6.1.1.5. After testing, return the assembly to room temperature and subject the assembly to the performance tests of 4.6.1.

4.6.3.3 Low temperature. Subject the assembly in its normal operating condition to the low temperature test specified in MIL-STD-810, Method 502. Maintain the temperature at -65°F for a period of 12 hours minimum. At the conclusion of the storage temperature test, stabilize the assembly at -25°F and subject it to the performance tests of 4.6.1.1.1 through 4.6.1.1.5. After

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

testing, return the assembly to room temperature and subject the assembly to the performance tests of 4.6.1.

4.6.3.4 Vibration. Subject the assembly in its normal operating condition t-o the vibration requirements in accordance with MIL-STD-810, Method 514, General Procedures, and 3.2.3.3. The vibration amplitude shall have a tolerance of ±10%. The tolerance of the vibration frequency shall be ±2%, or ±1/2 Hz for frequencies below 25 Hz. Resonance search shall be conducted at room temperature with the input power applied. After resonance (if any) has been detected, place the assembly in a 125°F ambient environment and subject it to vibration sweeps for 80 minutes minimum in each of three mutually perpendicular axes with resonance dwell of 13 1/3 minutes each (4 max) at points (if any) detected. During vibration, the input power shall be applied. Verify that no discontinuity occurs (see 3.2.1.1.2). At the conclusion of t-his test, return the assembly to room temperature and subject the assembly to t-he performance tests of 4.6.1.

4.6.3.5 Shock. Subject the assembly in its normal operating condition to the functional shock test for ground equipment specified in MIL-STD-810, Method 516, for a total of three half sine wave shock pulses in both directions along three mutually perpendicular axes (18 shocks). Peak amplitude shall be 40 ± 4 g's with a time duration of 18 + 3 msec measured at the 10 percent amplitude points. During this test, apply input power and verify that no discontinuity occurs. At the conclusion of this test, subject the assembly to the performance tests of 4.6.1.

4.6.3.6 Loose cargo transport. Subject the assembly in its normal operating condition to the vibration test specified in MIL-STD-810, Method 514, with the lid closed and fastened. Testing shall be conducted for three hours, one half hour for each of six faces (top, bottom, sides and ends). At the conclusion of this test, subject the assembly to the performance tests of 4.6.1.

4.6.3.7 Humidity. Subject the assembly in its normal operating condition to a 10 day aggravated humidity test as specified in MIL-STD-810, Method 507. During and after this test, subject the assembly to t-he performance tests of 4.6.1.1.1 through 4.6.1.1.5. At the conclusion of this testing, return the assembly to room temperature and subject the assembly to the performance tests of 4.6.1.

4.6.3.8 Fungus resistance. The assembly shall meet the requirements specified herein after being subjected to testing per MIL-STD-810, Method 508, including test organisms, stock culture maintenance, spore suspension, and inoculation and incubation for a total of 28 days. A certificate of conformance attesting that these requirements are satisfied is permissible.

4.6.4 General specifications. Verification of precedence

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

or inspections (including workmanship) required shall be performed by examination visually or through the use of standard measuring equipment in accordance with 3.1.2.

4.6.5 Packaging inspection. The sampling and inspection of the preservation, packaging, packing and container marking shall be in accordance with MIL-STD-2073-1.

5. PACKAGING

5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with packaging data sheet PS11733300. The level of projection shall be as specified in the procurement document (see 4.5.3, 6.2 and 6.7).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The Cable Test. Set is intended to be used to test XM21 ballistic computer, AN/VVG-2 Laser Rangefinder and the AN/VSG-2 Tank Thermal Sight Cables.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of t-his specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1).

c. Inspection provisions for first article (see 6.3).

d. Applicable levels of preservation, packaging, packing and container marking (see 5.1 and 6.7).

6.3 First article. The contracting officer should provide specific guidance to offerors for the submission of a first article sample to be tested as specified in 4.4.2. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract . Bidders should not submit alternate bids unless

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

specifically requested to do so in the solicitation.

6.4 Supersession. Previous revisions of MIL-T-48466(AR) were for the U.S. Army Armament Research, Development, and Engineering Center's internal use only, and were not forwarded to the Naval Publications and Form Center for publication.

6.5 Submission of contractor inspection equipment designs for approval. Submit copies of designs as required to: Commander, U.S. Army ARDEC, ATTN: SMCAR-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract.

6.6 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament, Research, Development and Engineering Center (ARDEC) may also include drawings prepared by, and identified as U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.7 Levels of packaging . The following definitions describe the three levels of packaging in accordance with MIL-STD-2073-1.

a. Level A - Adequate protection for indeterminate storage and worldwide distribution.

b. Level B - Adequate protection for known shipment conditions and storage conditions normally not exceeding one year.

c. Level C - Adequate protection for shipment to a known site for immediate use.

6.8 Alternative quality conformance provisions . Alternative quality conformance procedures, methods, or equipment, such as statistical process control, tool control, other types of sampling procedures, etc., may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation. When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the specified quality assurance provision(s) herein. In cases of dispute as to whether the contractor's proposed alternative(s) provides equivalent assurance, the provisions of this specification shall apply. All approved alternative provisions shall be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable. Unless otherwise specified in the contract, proposed alternative quality conformance provisions will be submitted by the contractor for evaluation

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

by the Government technical activity.

6.9 Subject (key word) listing.

Ammo Select
Fire Control
Interconnection
Power
Tank, M60A3

Custodian:
Army-AR

Preparing Activity
Army-AR

Project 4931-A184

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
3. DOCUMENT TITLE		

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:27Z
Check the source to verify that this is the current version before use.