PPP-B-23B
January 31, 1974
SUPERSEDING
Fed. Spec. PPP-B-23A
May 12, 1967

FEDERAL SPECIFICATION

BAGS, MOTION SICKNESS

This specification was approved by the Commissioner, Federal Supply Services, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers requirements for two types of leak-proof motion sickness bags (see 6.1).

1.2 Classification.

1.2.1 Types. Motion sickness bags shall be furnished in the following types as specified (see 6.2):

Type I - Polyethylene (with wire tie)

Type II - Paper, Polyethylene lined (with metal closure)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bid or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

L-P-378 - Plastic Sheet and Strip, Thin Gauge (Polyolefin)

UU-B-36 - Bags, Paper (Grocers)

PPP-B-585 - Boxes, Wood, Wirebound

PPP-B-601 - Boxes, Wood Cleated-Plywood

PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner

PPP-B-636 - Boxes, Shipping, Fiberboard

Federal Standard:

FED-STD-123 - Marking for Domestic shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points of their agencies.)

Military Specification:

MIL-L-10547 - Liners, Case, and Sheet, Overwrap; Water-vaporproof or Waterproof, Flexible.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspections by Attributes.

MIL-STD-129 - Marking for shipment and storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Technical Association of the Pulp and Paper Industry (TAPPI):

T 403/ts - Bursting Strength of Paper.

T 410/os - Basis Weight of Paper and Paperboard.

T 414/ts - Internal Tearing Resistance of Paper.

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, One Dunwoody Park, Altanta, GA 30341.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, NW Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Type I. The bag shall be made from polyethylene film conforming to Type I or II; Class I, Grade A, B, or C,finish I, of L-P-378. The color of the film is optional.

3.1.2 Type II. The bag shall be made from bleached kraft paper, minimum basis weight 30 pounds (24"x36" - 500 sheets) lined with polyethylene film.

3.1.3 Thickness of film. The film shall be manufactured by a properly controlled extrusion process so that the thickness of the film for type I and type II shall not be less than 0.00125 ± 10 percent. No segment of the bags shall be less than the thickness specified (see 4.4.3).

3.1.4 Tubing and sheets. Tubing and sheets used in type I bags shall be clean and free from pinholes, tears, cracks, blisters, creases, nicks, and cuts, or other defects which will impair its usefulness for the intended purpose.

3.1.5 Bursting strength. The bursting strength for the paper used in type II bag shall be not less than 17 points (see 4.4.4).

3.1.6 Tearing resistance. The tearing resistance of the paper, in the finished type II bag, shall be not less than .42 grams, machine direction (see 4.4.4).

3.1.7 Adhesive. The adhesive used for joining the seams of the bags shall be water-resistant and shall meet the test requirements of 4.4.1.2.

3.2 Construction.

3.2.1 Type I. The bags shall be rectangular construction or style. Bags shall be made from preformed tubular material closed by a seal at the bottom or flat stock with side seams which shall be parallel with sides of the bag. All seams shall be sealed by means of electronic, thermal impulse jaw, rotary, or band type sealer. Each bag shall be provided with a plastic or paper covered wire tie as

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

described in 3.4.1 (see fig 1).

3.2.2 Type II. The bags shall be of the self-opening (automatic) type with a flat rectangular bottom positioned so that the bottom is to the front. Seams of the polyethylene liner and the paper bag shall be securely sealed to prevent leakage. The paper bag and liner shall be anchored securely at the top of opening with adhesive to prevent separation. A metal closure shall be attached across the top edge of opening with adhesive to the outside of the bag (see fig 1). The closure shall be as specified in 3.4.2.

3.2.2.1 Seams. Seams shall be jointed with a water-resistant adhesive in a continuous line (see 3.1.7) The minimum amount of overlap shall be 3/4 inch. The seams shall be staggered.

3.2.3 Leakage. Type I and II bags shall pass the leakage test of 4.4.2.

3.3 Dimensions.

3.3.1 Type I. The bag dimensions shall be inside dimensions measuring 6-1/8 inches wide, 12 inches long, 3 inch gusset, with a tolerance of plus or minus 1/2 inch.

3.3.2 Type II. The bag dimensions shall be inside dimensions, measuring 4-3/4 inches wide, 11 inches long, 3-1/8 inch gusset, with a tolerance of plus or minus 1/2 inch.

3.4 Closure.

3.4.1 Type I. Closure shall be by means of a wire tie of nominal 26 gage wire (0.018 inch diameter), 4 inches in length imbedded or laminated in vinyl plastic or paper so that the strip is a minimum of 1/8 inch in width and a maximum of 3/8 inch in width. The tie shall be secured to the bag with tape at least one inch long and located equidistant from the sides and no more than 2-1/2 inches from the top.

3.4.2 Type II bags. The closure shall be metal imbedded or laminated in a vinyl plastic or paper so as to produce a closure strip not less than 3/16 inch wide by 6-1/4 inches long. The metal may be nominal 26 gage (0.018 inch diameter) wire or flat metal strip of equal strength and flexibility. The closure strip shall be securely fastened to the bag and located as illustrated (see fig 1).

3.5 Sanitary packet. Each type I bag shall be quarter folded and shall be inserted in either a paper envelope not less than 3-1/2 inches by 6-1/2 inches or a clear polyethylene envelope of the same dimensions having a minimum thickness of 0.00125 inches. Flaps of the envelope shall have a minimum length of 1-1/4 inches and a maximum of 2 inches in length. A legend shall be printed at midpoint of and parallel to the long sides, centered on the face of the envelope as follows:

-MOTION SICKNESS BAGS-

For use during moments of stomach upset. If an upset stomach is anticipated, remove bag from this container and keep ready for use. Do not be embarrassed by this precaution as even veteran travelers are subject to occasional motion sickness.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. Each bag shall be uniformly constructed and shall open easily so as not to impede its hasty use. The finished product shall conform to the levels of quality established herein, and shall be free from defects which detract from its appearance or which may impair its serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Sampling for inspection and acceptance. Except where otherwise indicated, sampling for inspection and acceptance shall be performed in accordance with the provisions of MIL-STD-105. For purpose of sampling, an inspection lot for examination and tests shall consist of all bags made by the same process from the same component material by one manufacturer, and submitted for delivery at one time.

4.2 Inspection of materials. In accordance with 4.1 the supplier is responsible for insuring that materials used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or, if none, in accordance with this specification. In the event of conflict, this specification shall govern.

4.3 Inspection of the end item. An examination of the end item shall be made in accordance with the classification of defects, inspection levels, and acceptable quality levels (AQLs) set forth below. A random sample shall be drawn from each lot offered for acceptance for visual and dimensional characteristics. For purpose of determining the sample size in accordance with MIL-STD-105, the lot size for examination under 4.3.1.1 through 4.3.1.3 shall be expressed in units of package of bags of the same materials and for examination under 4.3.1.4 shall be expressed in units of shipping containers.

4.3.1.1 Examination of the end item for defects in appearance, construction, and general workmanship. The sample unit for this examination shall be one bag. Examine both sides.

Examine	Defects	Classification Major - Minor
Material	Bags not fabricated from material specified (see 3.1.1, 3.1.2, and 3.1.3).	X
Appearance and workmanship	Tear, cut, or holes (including pinholes). Presence of scuff marks, chafed spot, sharp wrinkles or creases in body or sealed areas.	X

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major - Minor
	Bags stick together to the extent that opening causes tearing or injury to any surface.	X
	Seams not uniform and in alignment; not completely sealed throughout their entire areas.	X
	Seams other than specified	X
Fold	Not quarter folded	X
	Not clean	X
Printing (type I only)	Not printed in manner specified; ommited; illegible; incorrect, or not in position specified (3.5)	X
Closure	Methods of closure not conforming to para 3.4	X

4.3.1.2 Examination of the end item for dimensional defects. The sample unit for this examination shall be one bag.

Examine	Defects	Classification Major - Minor
Bag	Length or width not within tolerance	X
Film	Thickness of film not within tolerance	X
Seams	Seams not straight or continuous	X
	Seams not properly located	X
Metal Tie	Metal not nominal 26 gage (0.018 inch diameter)	X
	Length or width not within tolerance specified	X
	Not secured to bag	X
	Located in wrong place.	X

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

4.3.1.3 Examination of preparation for delivery. An examination shall be made to determine the packing and marking comply with the requirements of section 5. The sample unit shall be one fully packed shipping container selected just prior to the closing operations. Shipping containers fully prepared for delivery shall be examined for closure defects.

Examine	Defects	Classification Major	Classification Minor
Packing	Shipping containers not closely packed. Not level specified; not in accordance with contract requirements. Container material not as specified; closures not accomplished by specified or required methods.	X	
Marking	Marking (as applicable) illegible, incorrect incomplete, ommited, or not in accordance with contract requirements.	X	
Weight	Gross weight exceeds contract requirements for applicable type shipping container.	X	

4.3.1.4 Inspection levels and AQLs for examination. The inspection for the purpose of determining the sample size and the AQLs expressed in defects per 100 unit shall be as follows:

Examination paragraph	Inspection level	AQL
4.3.1.1	S-3	2.5
4.3.1.2	S-2	2.5
4.3.1.3	S-2	4.0

4.3.2 Testing of end item. Testing shall be performed for the characteristics as indicated in Table I on samples randomly selected from each lot of bags offered for Government acceptance. The sample unit shall be one bag. Failure to meet the AQL, as indicated, shall be cause for rejection of the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

TABLE I. Testing of the end item (types I and II)

Characteristic	Basic spec reqt par.	Test Method	Reqt. Appl. to: Individual unit	Reqt. Appl. to: Lot Average	Number determinations per Sample Unit	Results reported as[1]: Pass or fail	Results reported as[1]: Numerically to nearest	Inspection Level: Level	Inspection Level: In defects per 100 units
Seam strength	3.2	4.4.1	X	---	1	X	---	S-3	2.5
Adhesive	3.1.7	4.4.1.2	X	---	1	X	---	S-3	2.5
Closure	3.4	4.4.2	X	---	1	X	---	S-3	2.5

[1] If failure is indicated, report either description of failure or numerical point of failure, as applicable.

4.4 Method of test for types I and II.

4.4.1 Seam strength. One hour after sealing, one 1-inch wide specimen shall be cut perpendicular to the line of the seam from seam of each sample bag. One leg of the specimen shall be so clamped that the specimen hangs freely. A load of 3-1/2 pounds shall be applied to the free end in such manner as to avoid impact loading the seam. The load shall be allowed to act for 5 minutes; the seam shall then be examined for slippage or peel back. The test shall be conducted at room temperature. (For reference purposes, room temperature shall be 70° to 80°F). Peel back shall be defined as any separation of the seam from the inside line of contact of the sealer.

4.4.1.2 Water-resistance of adhesive (seam strength). The adhesive shall be tested for resistance to water as follows: Cut 10 strips one inch wide across the longitudinal seam, adjusting the length so that both sheetings will extend approximately 1-1/2 inch beyond one edge of the cemented joints. Immerse the test specimens in one to two inches of distilled water at 73 ± 5°F for 24 hours. Remove one specimen at a time, blot off excess water with blotting paper, and test before removing the next strip. To test, grasp the projecting ends of the sheetings with one thickness between the thumb and forefinger of each hand, the forefinger resting against the cemented joints, one on each side. Separate the joint, noting the percent of separation that occurs without fiber failure of the paper surface. Test not less than ten strips for each determination. Separation of the adhesive from more than 25 percent of the surface of either ply without visible fiber failure shall be reported as failure of the adhesive.

4.4.2 Performance leakage test.

4.4.2.1 Type I bag. The bag shall be placed flat in a horizontal position on a flat, smooth, level, white surface. It shall be partially filled with water containing a water soluble dye such as methylene blue to a volume 2 inches above side folds and seams. The bag shall be heat sealed along the top edge. After

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

allowing bag to remain in this condition for a period of 3 hours at a temperature of 73 ± 5°F, the bag and surface under the bag shall be examined for evidence of leakage, and the volume above water level shall be noted for evidence of deflation. Leakage from the final closure seal for conducting tests shall not be considered as a defect.

4.4.2.2 Typed II bags. The bag shall be placed in an upright position on a flat smooth level, white surface. It shall be filled 1/3 full of water containing a water soluble dye such as methylene blue and the bag heat sealed along the top edge. After allowing the bag to remain in this position for a period of 3 hours at a temperature of 73 ± 5°F, the bag and surface shall show no signs of leakage. Leakage from the top closure seal for conducting tests shall not be considered as a defect.

4.4.3 Thickness of film. At least eight measurements shall be made using a micrometer on any one sample bag and all of them shall be not less than the minimum thickness required.

4.4.4 The following test shall be made in accordance with the indicated TAPPI standards:

Test	TAPPI Standard
Basis weight	T 410 os
Bursting strength	T 403 ts
Tearing resistance	T 414 ts

4.5 Rejection and retest. Bags which have been tested shall not be resubmitted for acceptance. Bags which fail to pass all requirements of this specification are classified as defective. Lots which have been rejected may be reworked or replaced to correct the defects and resubmitted for acceptance. Before resubmitting, full particulars concerning previous rejection and the action taken to correct the defects found in the original shall be furnished the inspector in writing, or in his absence, forwarded to the procuring activity. Bags rejected after retest shall not be resubmitted without the specific approval of the procuring activity.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, or C, as specified in the contract or order (see 6.2).

5.1.1 Level A. Unless otherwise specified, one thousand bags of the same type shall be packed in containers conforming to PPP-B-585, PPP-B-601, PPP-B-621, or PPP-B-636, type CF, class WR. Each box shall be provided with a case liner conforming to MIL-L-10547. Case liner will not be required for PPP-B-636 provided all seams including manufacturer joint are sealed with a waterproof tape. All containers shall be closed and sealed in accordance with applicable box specification or appendix thereto.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

5.1.2 Level B. Unless otherwise specified, one thousand bags of the same type shall be packed in a fiberboard box conforming to PPP-B-636, type CF, class domestic and method I closure of PPP-B-636 shall be utilized.

5.1.3 Level C. The bags shall be packed to insure carrier acceptance and safe delivery at destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.2 Marking.

5.2.1 Civil agencies. In addition to markings required by the contract or order, the shipping container shall be marked in accordance with Fed Std. No. 123.

5.2.2 Military agencies: In addition to markings required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. These bags are intended for use by persons experiencing motion sickness.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

a. Title, number, and date of this specification.

b. Type of bag


c. Quantity

d. Level of packing (see 5.1).


6.3 Classification comparison. Style I of types I and II bags and type III paper, double walled, self-opening deleted.

PPP-23A Designation		PPP-B-23B Designation
Type I	Style 1	Deleted
Type I	Style 2	Type I
Type II	Style 1	Deleted
Type II	Style 2	Type II
Type III		Deleted

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

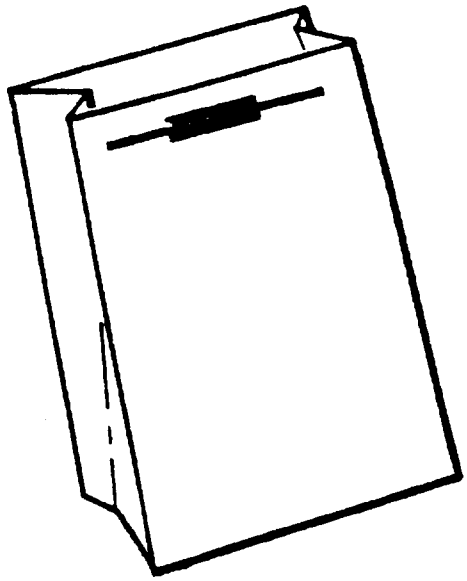

TYPE I
Polyethylene, with wire tie

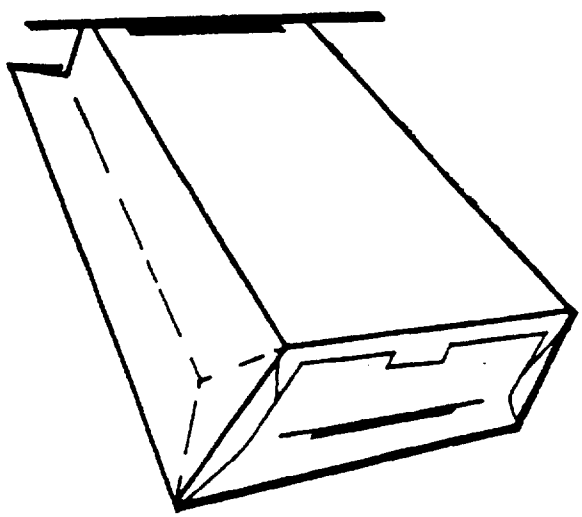

TYPE II
Paper, Polyethylene Lined (with Metal Closure)

Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army - GL

Navy - SA

Air Force - 69

Review activities:

Army - MD

Navy - MS

Air Force - 71, 82, 84

Defense Supply Agency - DM

User activity:

Air Force - 80

Preparing activity:

Air Force - 69

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

PROJECT NUMBER: 8105-0219

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.