PPP-P-130A
August 14, 1970
SUPERSEDING
Fed. Spec. PPP-P-130
March 13, 1964

FEDERAL SPECIFICATION

PAILS, CANS AND WASTE RECEPTACLES, PACKING OF

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the packing and marking of pails, cans, and waste receptacles.

1.2 Classification. Packing and marking of pails, cans, and receptacles shall be of the following types, as specified below (see 6.1 and table VII):

Type I. Cans, ash and garbage, metal; 5, 10, 16, 24, and 32 gallon capacity.

Type II. Cans, ash and garbage, plastic; 32 gallon capacity.

Type III. Can, flammable waste; 6, 10, and 21 gallon capacity.

Type IV. Can, radiator filling; 3 gallon.

Type V. Can, sprinkling; 12 quart capacity.

Type VI. Cans, utility pour spout and faucet dispensing, kerosene; 1, 2, 3, and 5 gallon capacity.

Type VII. Pail, metal, galvanized; 10, 12, and 14 quart capacity.

Type VIII. Pail, metal, corrosion-resisting steel; 8, 9, 10, 12, and 16 quart capacity.

Type IX. Pail, metal, aluminum; 12, 14, 16, 22, and 24 quart capacity.

Type X. Pail, canvas, collapsible; 10 and 12 quart capacity.

Type XI. Pail, rubber; 3 gallon capacity.

Type XII. Ice can; 16 pounds of ice capacity.

Type XIII. Safety can, spring closing type; 1 and 2 quart and 1, 2, 3, and 5 gallon capacity.

Type XIV. Waste receptacle, mounted style.

Type XV. Waste receptacle, step on type.

Type XVI. Waste receptacle, swinging door.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

Federal Specifications.

QQ-S-781 - Steel Strapping, Flat.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-636 - Box, Fiberboard.
PPP-C-650 - Crates, Wood, Open and Covered.
PPP-F-320 - Fiberboard; Corrugated and Solid Sheet Stock (Container Grade) and Cut Shapes.

Federal Standard:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" by 48" Pallets, Skids, Runners, Pallet-Type Base.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Classification Board:

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Attn: Tariff Order Section, 1616 P Street N. W., Washington, D. C. 20036.)

Uniform Classification Committee:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, Chicago, Illinois 60606).

3. REQUIREMENTS

3.1 Materials. The materials shall conform to the applicable referenced specifications, standards, and requirements as specified herein. Materials not specified shall be of the quality used in current industry practice. All packing materials shall conform, as a minimum requirement, to the carrier rules and regulations applicable to the mode of transportation.

3.2 Packing. Packing shall be level A, B, or C, as specified (see 6.1).

3.2.1 Level A.

3.2.1.1 Type I cans, ash and garbage, metal; 5, 10, 16, 24, and 32 gallon capacity.

3.2.1.1.1 Sets. When cans of different capacities are prepared for shipment in sets, the cans shall be nested one within the other, complete with covers. The sets of cans shall be packed in palletized unit loads in accordance with MIL-STD-147 for load type IV with separators as required.

3.2.1.1.2 Identical capacities. Cans of identical capacities shall be packed in palletized unit loads in accordance with MIL-STD-147 for load type V with blocking as required.

3.2.1.1.3 Can covers.

3.2.1.1.3.1 Nesting type. Twelve nesting type can covers of one size only, shall be nested in one stack and single strapped as illustrated in figure 1. Two single strapped stacks of twelve nesting type can covers (24 total), of one size, shall be packed in a nailed wood open type crate constructed to fit the contents in a compact manner in accordance with figure 1 or a fiberboard box conforming to PPP-B-636, grade V2s, style FOL. The fiberboard boxes shall be closed and strapped in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:49Z
Check the source to verify that this is the currentversion before use.

3.2.1.1.3.2 Non-nesting type. Twelve non-nesting type can covers, of one size only, shall be stacked so that the covers are partially nested. Covers shall be staggered in nesting to form a compact cylindrical stack and stack strapped as illustrated in figure 1. Two double strapped stacks of twelve non-nesting type can covers (24 total), of one size, shall be packed in a nailed wood open type crate constructed to fit the contents in a compact manner in accordance with figure 1 or a fiberboard box conforming to PPP-B-636, style FOL, grade V2s. The fiberboard boxes shall be closed and strapped in accordance with the appendix to PPP-B-636.

3.2.1.2 Type II, cans, ash and garbage, plastic 32 gallon capacity. Four cans with covers shall be packed in a snug-fitting shipping container constructed, closed and strapped in conformance with PPP-B-636, style RSC, grade V2s. The fiberboard boxes shall be closed and strapped in accordance with the appendix of PPP-B-636.

3.2.1.3 Type III, can, flammable waste. One can of 21 gallon capacity or two cans of 6 or 10 gallon capacity each of identical capacity shall be packed in a snug-fitting shipping container constructed, closed, and strapped in conformance with PPP-B-636, style RSC, grade V2s. When two cans are packed in a shipping container, they shall be separated from each other in the shipping container by a fiberboard partition. The partition shall be made of A or C flute fiberboard conforming to PPP-F-320, type CF, class weather-resistant, grade W5c.

3.2.1.4 Type IV, can, radiator filling, 3 gallon; and type V, can sprinkling, 12 quart capacity. Four type IV or V cans shall be packed two in upright position and two inverted in a snug-fitting shipping container, constructed, closed and strapped in conformance with PPP-B-636, grade V2s, style RSC.

3.2.1.5 Type IV, cans, utility pour spout and faucet dispensing kerosene, 1, 2, 3, and 5 gallon capacity. Six cans of the 1 and 2 gallon capacity cans or 4 cans of the 3 and 5 gallon capacity cans shall be packed on end in a snug-fitting container. The shipping container shall be constructed, closed, and strapped in conformance with the requirements of PPP-B-636, grade V2s, style RSC. The cans shall be separated from one another by means of full height, half-slotted partitions from A or C flute fiberboard, conforming to PPP-F-320, type CF, class weather-resistant, grade W5c. Only cans of identical capacity shall be packed in a shipping container.

3.2.1.6 Type VII, pail, metal, galvanized, 10, 12, and 14 quart capacity. Cans of identical capacities shall be packed in palletized unit loads in accordance with MIL-STD-147, load type V.

3.2.1.7 Type VIII, pail, metal, corrosion-resisting steel, 8, 9, 10, 12, and 16 quart capacity.

3.2.1.7.1 Sets. When pails of different capacities are to be prepared for shipment in sets, they shall be nested one within the other. Each individual set shall then be packed in a snug-fitting container constructed, closed, and strapped in conformance with PPP-B-636, style RSC, grade V2s. Shipping containers shall be provided with sufficient cushioning to insure against shifting of or damage to the contents.

3.2.1.7.2 Identical capacities. Six pails shall be nested in one stack in a snug-fitting shipping container constructed, closed, and strapped in conformance with PPP-B-636, style RSC, grade V2s.

3.2.1.8 Type IX, pail, metal, aluminum, 12, 14, 16, 19, 22, and 24 quart capacity. Six pails of identical capacities shall be nested in one stack in a snug-fitting shipping container constructed, closed, strapped, and waterproofed in conformance with PPP-B-636, style RSC (end opening), grade V2s. Prior to the nesting of the pails each pail shall be individually wrapped in two sheets of paper having a minimum basis weight of not less than 10 pounds per ream (24 x 36 - 500).

3.2.1.9 Type X, pail, canvas, 10 or 12 quart capacity. Twelve pails of identical capacities shall be stacked vertically in a snug-fitting shipping container constructed, closed, strapped, and waterproofed in conformance with PPP-B-636, style RSC, grade V2s. Prior to the stacking of the pails each pail shall be placed in a bag or completely wrapped in a paper having a minimum basis weight of not less than 20 pounds per ream (24 x 36-500).

3.2.1.10 Type XI, pail, rubber, 3 gallon capacity. Twelve pails shall be nested in one stack in a snug-fitting shipping container constructed, closed, and strapped in conformance with PPP-B-636, style RSC (end opening), grade V2s.

3.2.1.11 Type XII, ice can, 16 pounds capacity. Each can shall be individually packed in a snug-fitting fiberboard box constructed and closed in conformance with PPP-B-636, style RSC. Four individually packed ice cans shall be overpacked in a snug-fitting shipping container constructed, closed and strapped in conformance with PPP-B-636, style RSC or CSSC, grade V2s.

3.2.1.13 Type XIV, waste receptacle, mounted; type XV, waste receptacle, step-on type; type XVI, waste receptacle, swing door. Each receptacle shall be individually packed in a snug-fitting fiberboard box constructed and closed in conformance with PPP-B-636, style RSC, grade V2s.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

3.2.1.14 Consolidation. When specified (see 6.1), pails and cans packed as specified in 3.2.1 shall be overpacked in consolidation containers conforming to PPP-B-601, overseas type, style A or B. Skids shall be provided and the dimensions shall not exceed 88 x 45 x 43 inches. Closure and strapping shall be in accordance with the appendix of PPP-B-601. The weight of contents shall not exceed 1000 pounds.

3.2.2 Level B.

3.2.2.1 Type I, cans, ash and garbage, metal, 5, 10, 16, 24, and 32 gallon capacity.

3.2.2.1.1 Sets. When cans of different capacities are to be prepared for shipment in sets, they shall be nested one within the other, complete with covers. The cover of the outer can shall be held in place by passing an annealed steel wire not less than 13 gage through the opening of one handle retainer between the side wall of the can and the handle, carrying the two ends of wire up over the cover through the cover handle, down through the other handle retainer on the opposite side of the can, twisting the two ends of the wire tightly with a pair of pliers to remove all slack and turning the twist thus formed, down parallel to the wire.

3.2.2.1.2 Identical capacity. When cans of identical capacity are to be prepared for shipment, they shall be nested one within the other in quantity specified in table I and secured as specified in 3.2.2.1.3 and 3.2.2.1.4.

TABLE I. Count relationship to can capacity

Size	Cans per bundle
5 Gallon	10
10 Gallon	6
16 Gallon	4
24 Gallon	3
32 Gallon	3

3.2.2.1.3 Five and ten gallon cans. Bundles of 5 and 10 gallon cans shall have the ears and bails in alignment and shall be securely tied with two annealed steel wires, not less than 13 gage, fastened on opposite sides. Each wire shall pass through one ear of the bottom can, through one ear of the top can, and the two ends of the wire twisted tightly with a pair of pliers so that all slack is removed from the wire. The twist shall be turned in behind the rim of one can so that it is not left in an exposed position where it might injure anyone handling the bundle.

3.2.2.1.4 Sixteen gallon and larger cans. Bundles of 16, 24, and 32 gallon cans shall have the handles in alignment and shall be securely tied with two annealed steel wires, not less than 13 gage, fastened on opposite sides. Each wire shall pass through the opening of the handle retainer of the bottom can, between the side wall of the can and handle and through the opening of the handle retainer of the top can in the same manner. The ends of the wire shall be twisted tightly together with a pair of pliers to remove all slack and the twist thus formed, turned down parallel to the wire.

3.2.2.1.5 Can covers. Can covers shall be packed as specified in 3.2.1.1.3, except the shipping containers shall conform to PPP-B-636, style FOL, type CF or SF, class domestic, variety optional, grade minimum 275.

3.2.2.2 Type II, cans, ash and garbage, plastic 32 gallon capacity. Plastic cans shall be packed as specified in 3.2.1.2 except that the fiberboard box shall conform to PPP-B-636, type CF, class domestic.

3.2.2.3 Type III, can, flammable waste, 6, 10, and 21 gallon capacity. Waste cans shall be packed as specified in 3.2.1.3, except that the fiberboard box and partition shall conform to PPP-B-636, type CF, class domestic, and the partitions shall be made from A or C flute corrugated fiberboard conforming to PPP-F-320, type CF, class domestic, grade 200.

3.2.2.4 Type IV, can, radiator filling, 3 gallon capacity; and type V, can, sprinkling, 12 quart capacity. Cans shall be packed as specified in 3.2.1.4, except that the fiberboard box shall conform to PPP-B-636, type CF, class domestic.

3.2.2.5 Type VI, cans, utility, pour spout and faucet dispensing, kerosene, 1, 2, 3, and 5 gallon capacity. Utility cans shall be packed as specified in 3.2.1.5, except that the fiberboard box shall conform to PPP-B-636, type CF, class domestic and the partitions shall conform to PPP-F-320, type CF, class domestic, grade 200.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:49Z
Check the source to verify that this is the current version before use.

3.2.2.6 Type VII, pail, metal galvanized, 10, 12, and 14 quart capacity. The pails shall be nested in sets of ten with the ears and bails in alignment. Each set shall be securely tied with two minimum 0.08 inch diameter annealed wires protected by a rust-resisting coating, fastened on opposite sides. Each wire shall pass through one ear of the bottom pail, up between the bails and rims of all pails, through one ear of the top pail. The two ends of the wire shall be twisted tightly with a pair of pliers so that any slack is removed from the wire. The twist shall be turned in behind the rim of one pail so that it is not in an exposed position where it might injure anyone handling the set.

3.2.2.7 Type VIII, pail, metal, corrosion resisting steel, 8, 9, 10, 12, and 16 quart capacity. Pails shall be packed as specified in 3.2.1.7, except that the fiberboard box shall conform to PPP-B-636, type CF, class domestic.

3.2.2.8 Type IX, pail, metal, aluminum, 12, 14, 16, 19, 22, and 24 quart capacity. Pails shall be packed as specified in 3.2.1.9, except that the fiberboard box shall conform to PPP-B-636, type CF, class domestic.

3.2.2.9 Type X, pail, canvas, 10 or 12 quart capacity. Pails shall be packed as specified in 3.2.1.9, except that the fiberboard box shall conform to PPP-B-636, type CF, class domestic.

3.2.2.10 Type XI, pail, rubber, 3 gallon capacity. Pails shall be packed as specified in 3.2.1.10, except that the fiberboard box shall conform to PPP-B-636, type CF, class domestic.

3.2.2.11 Type XII, ice can, 16 pounds of ice capacity. Cans shall be packed as specified in 3.2.1.11, except that the fiberboard boxes shall conform to PPP-B-636, type CF, class domestic.

3.2.2.12 Type XIII, safety can, spring closing type, 1 and 2 quart and 1, 2, 3, and 5 gallon capacities. Cans shall be packed as specified in 3.2.1.5, except that the fiberboard box shall conform to PPP-B-636, type CF, class domestic, and the partitions shall conform to type CF, class domestic grade 200 PPP-F-320.

3.2.2.13 Type XIV-Waste receptacle, mounted; type XV-Waste receptacle, stepon type; type XVI-Waste receptacle, swinging door. Receptacles shall be packed as specified in 3.2.1.13, except that the fiberboard box shall conform to type CF, class domestic of PPP-B-636.

3.2.2.14 When specified (see 6.1), level B shipment shall be made using weather-resistant fiberboard shipping containers conforming to V3c or V3s of PPP-B-636 in place of domestic containers specified for level B.

3.2.2.15 Palletization. When specified (see 6.1), pails and cans, packed level B, shall be palletized in accordance with MIL-STD-147.

3.2.3 Level C. Pails, cans and covers shall be packed in a manner to insure carrier acceptance and safe delivery at destination at lowest transportation rate for such supplies. Containers shall comply with the National Freight Classification or Uniform Freight Classification Rules, as applicable.

3.3 Marking. Markings shall be Civil or Military as specified (see 6.1).

3.3.1 Civil agencies. In addition to any special marking specified in the procurement documents, shipments shall be marked in accordance with FED-STD-123.

3.3.2 Military agencies. In addition to any special marking specified in the procurement documents, shipments shall be marked in accordance with MIL-STD-129, except that items having foot levers, bails, or handles shall be tagged.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications and standards to the extent specified or, if none, in accordance with this specification or applicable purchase document.

4.2.2 Examination of the end items. Examinations shall be made to determine that packing and marking requirements conform to section 3. The sample unit for these examinations shall be one filled shipping container (palletized unit load, bundle, crate, or fiberboard box) fully prepared for shipment. The lot shall be the number of shipping containers offered for inspection at one time. The inspection levels and acceptable quality levels (AQL's) shall be as specified in 4.2.2.6.

4.2.2.1 Examination for packing (levels A and B). Sample units shall be examined for defects in table II.

TABLE II. Examination of packing and marking

Examine	Defects
Packing	Not specified level. Type and style of shipping container not as specified. Partitions, pads, cushioning or other components missing when applicable. Partitions, pads, cushioning, or other components not of the type, class, size, or material specified.
Cans, pails and can covers	Not individually packed in intermediate fiberboard box when specified. Not arranged, nested or stacked in the manner or quantities specified. Not placed in kraft bag or completely wrapped in kraft paper when specified. Count per shipping container more or less than specified or indicated quantity.
Marking	Omitted, incorrect, illegible; of improper size, location sequence, or method of application.

4.2.2.2 Examination of shipping containers (levels A and B).

4.2.2.2.1 Fiberboard boxes. When containers are required to be in conformance with PPP-B-636, examination for closure and strapping shall be in accordance with the appendix of that specification.

4.2.2.3 Crates, for packing covers of type I cans (levels A and B). When containers are required to be in accordance with figure 1, examination for quality of lumber and strapping shall be in accordance with PPP-C-650 and QQ-S-781. In addition, crates shall be examined for the defects in table III.

TABLE III. Examination fo strapping, clips, lumber and crates

Examine	Defects
Strapping stacks of type I can covers (both types)	Not strapped as specified (see 3.2.1.1.3.1 and 3.2.1.1.3.2, as applicable). Not secured with clips as illustrated (see figure 1). Strapping loose.
Clips (for securing strapping)	Not one of types illustrated (see figure 1).
Width	Less than 1-1/2 inches.
Thickness	Less than 16 gage.
Coating	Not zinc coated.
Assembled crate:	
Inside dimensions	Do not fit contents in a compact manner.
Lumber:	
Thickness	Less than 3/4 inch.
Width	Less than 2-1/2 inches.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

TABLE III. Examination of strapping, clips, lumber and crates (con.)

Examine	Defects
Nails	Not size specified (see figure 1). Less than two nails in each joint. Not positioned as specified (see figure 1).
Design	Not style illustrated (see figure 1); any design or construction detail including location of wood members, not as illustrated (see figure 1).
Construction	Not rigidly assembled, or visibly out of square. Head or point of nail projecting in such location or manner as to cause injury during handling of box. Width of board not even, or board end not square, by more than 1/8 inch. Any wood member broken or otherwise damaged.
Strapping on crate	Not properly placed lengthwise or girthwise as illustrated (see figure 1). Missing strap. Torn or cut strap. Loose strap. Weak joint (check manually).

4.2.2.4 Palletized unit loads (for type I cans and type IX pails, only). When cans and pails are required to be packed in palletized unit loads in accordance with MIL-STD-147 for load types IV or V, examination and testing of components and materials shall be in accordance with applicable subsidiary specifications referenced therein. In addition, palletized unit loads shall be examined for defects in table IV.

TABLE IV. Examination of palletized unit loads

Examine	Defects
Formation of loads	Not load type specified for commodity or unit packed (see appendix of MIL-STD-147).
Dimensions of load 1/	More than 52 inches in length. More than 43 inches in width. More than 54 inches in height.
Weights of load 2/	
For domestic shipment.	More than 2500 pounds.
For intercoastal and overseas shipments.	More than 2100 pounds.
Pallet pattern	Not as specified. (see MIL-STD-147).
Pallet load	Load not centered on pallet to provide equal amounts of margin or overhang on opposite sides or ends. Overhang more than 1-1/2 inches on each side. Overhang more than 2 inches on each side.
Load type IV	Cans not stacked in multiple courses with tray caps in between courses as specified (see MIL-STD-147).
Load type V	Cans not internally nested one on top of another to form alternately inverted and upright stocks and placed on an inverted wood cap, as specified (see MIL-STD-147).
Construction of bonded palletized loads	Type or construction not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

TABLE IV. Examination of palletized unit loads (con.)

Examine	Defects
Bonding means	Less than two primary tie-down straps. Less than two secondary tie-down straps. Horizontal strap missing, when required. Straps not positioned or spaced as specified. Any loose strap. Strapping less than size required for maximum safe working capacity (see applicable table in MIL-STD-147). Strapping not applied in sequence specified.
Storage aids fiberboard edge protector	Missing when required. Not positioned as specified.
Separators (for nested containers)	Omitted or not positioned as specified, when required.
Wood caps (for type V loads)	Lumber less than 3/4 inch thick and 2 inches wide. Cap under the load not inverted on the pallet. Not constructed as illustrated (see applicable figure in MIL-STD-147).
Corner support (for type V load)	Corner supports not 1/4 inch less than height of nested units. (Allow 1/8 inch). Corner supports not nailed to wood cap and inverted wood cap, as specified.
Tray caps (for type IV loads)	Not constructed as specified (see applicable figure in MIL-STD-147). Not positioned between courses and overtop of load as specified.


1/ Dimensions apply to the complete load including pallet, bonding and storage aids, and not to stacked units only.
2/ Weight applies to the entire load including pallet, bonding, storage aids, and units.

4.2.2.5 Tied bundles (level B) for type I cans and type IX pails only. Tied cans and pails for level B shipment shall be examined for defects in table V.

TABLE V. Examination of tied bundles

Examine	Defect
Arrangement Type I cans (sets)	Not nested complete with covers. Cover of top can not be secured as specified.
Type I cans (identical capacity)	Mixed sizes in one bundle.
5-gallon size	Not nested 10 cans per bundle.
10-gallon size	Not nested 6 cans per bundle.
16-gallon size	Not nested 4 cans per bundle.
24-gallon size	Not nested 3 cans per bundle.
32-gallon size	Not nested 3 cans per bundle.
5-and 10-gallon sizes	Ears and bails not in alignment.
16-, 24-, and 32-gallon sizes	Handles not in alignment.
Type IX pails	Not nested in sets of 10 pails.
Bundles Wire tying	Wire not type and size specified. Less than two wires used for tying. Wires not tied, twisted and secured as specified. Any wires left slack.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:49Z
Check the source to verify that this is the current version before use.

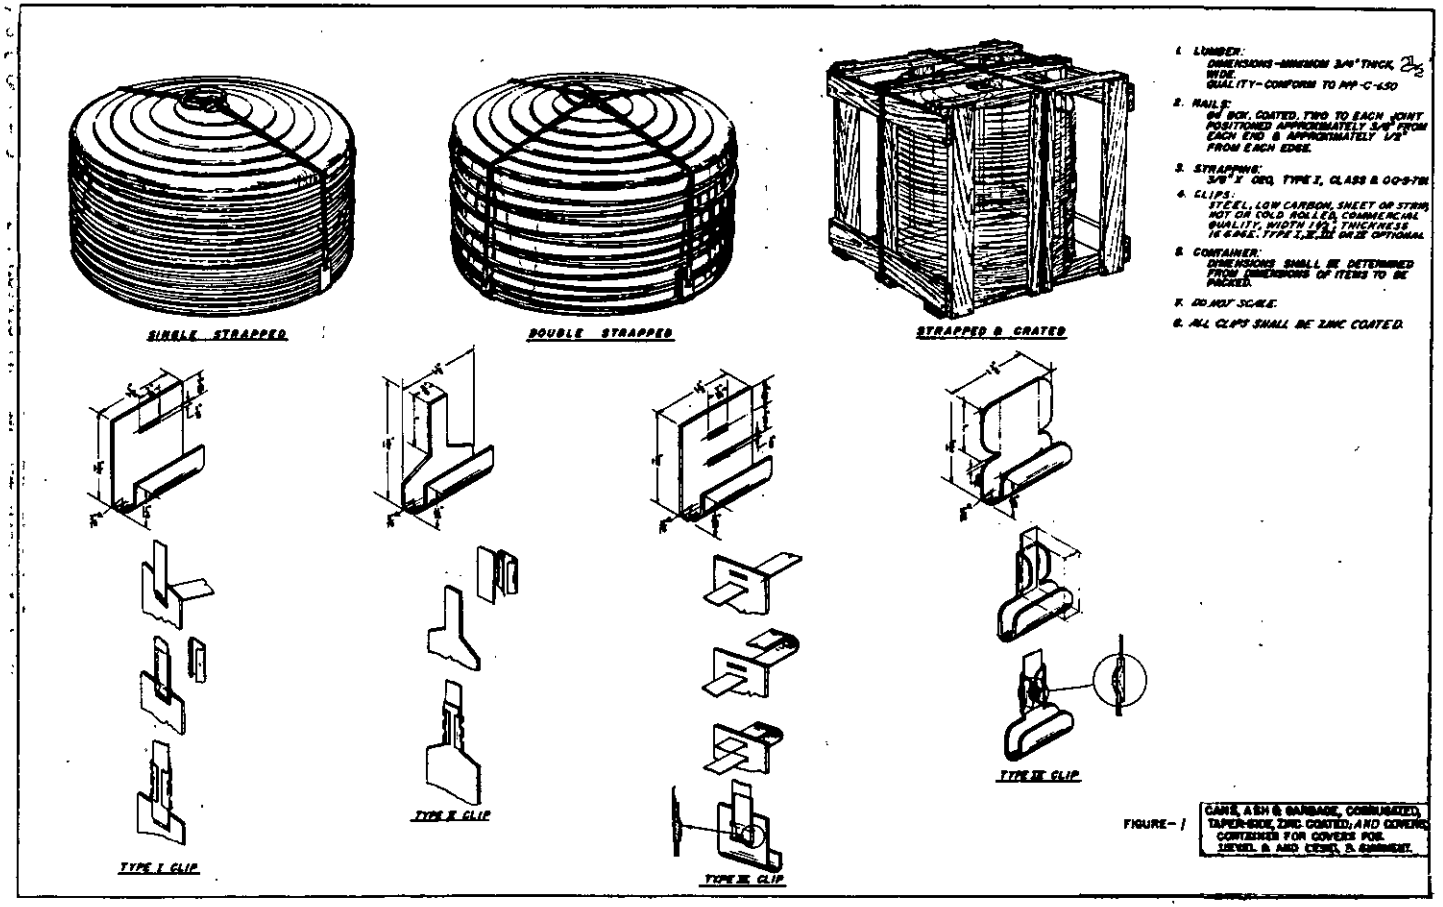

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:49Z
Check the source to verify that this is the current version before use.

4.2.2.6 Inspection AQL's for examination. The inspection levels for determining the sample size and the AQLs expressed in terms of defects per hundred units, shall be as indicated in table VI.

TABLE VI. Examination for sample sizes and AQL's

Examination paragraph	Inspection levels	AQL's
4.2.2.1	S4	6.5
4.2.2.3	S2	4.0
4.2.2.4	S2	10.0
4.2.2.5	S4	2.5

5. PREPARATION FOR DELIVERY. This section is not applicable to this specification.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2).
(c) The level of packing required (see 3.2).
(d) When consolidation is required (see 3.2.1.14).
(e) Whether weather-resistant boxes conforming to V3c or V3s of PPP-B-636 are required for level B shipments (see 3.2.2.14).
(f) When palletization is required (see 3.2.2.15).
(g) Selection of markings required (see 3.3).

TABLE VII. Cross reference type to applicable spec.

PPP-P-130A	Applicable Spec.
Type I	RR-C-82
Type II	L-W-25
Type III	RR-C-114
Type IV	MIL-C-40076
Type V	RR-C-94
Type VI	RR-S-30
Type VII	RR-P-35
Type VIII	MIL-P-20637
Type IX	RR-B-130
Type X	
Type XI	MIL-P-52415
Type XII	Buships Dwg. 5000S5904-F-1385618A
Type XIII	RR-S-30
Type XIV	
Type XV	RR-W-75
Type XVI	RR-W-1101

MILITARY CUSTODIANS:

Army - GL
Navy - YD
Air Force - 84

Review activities:

Army - SM
Navy - YD
Air Force - 84

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

GSA

Project No. PACK-0322

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:49Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Pails, Cans and Waste Receptacles, Packing Of PPP-P-130A

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-26112:492
Check the source to verify that this is the current version before use.