MIL-C-40058A(GL)
26 MARCH 1964
SUPERSEDING
MIL-C-40058(QMC)
11 MAY 1959

MILITARY SPECIFICATION

CABINETS, STORAGE, PRESERVATION AND PACKAGING EQUIPMENT

1. Scope

1.1 Scope. This specification covers steel and composite metal and wood storage cabinets used primarily for preservation and packaging equipment and material (see 6.1).

1.2 Classification. Storage cabinets shall be of the following types and classes, as specified (see 6.2):

Type I—Cabinets, storage, steel, wall-type

Class 1—Four equal compartments with hinged doors

Class 2—Two equal compartments with hinged doors

Type II—Cabinets, storage, composite metal and wood

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

TT-C-490 —Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.

TT-E-529 —Enamel, Alkyd, Semi-gloss.

TT-P-659 —Primer-Surfacer; Synthetic, Tints and White (for Metal and Wood Surfaces).

PPP-B-636 —Box, Fiberboard.

MILITARY

MIL-C-132 —Crates, Wood, Open, Maximum Capacity 2500 Pounds.

MIL-W-12332 —Welding, Resistance, Spot and Projection, for Fabricating Assemblies of Low-Carbon Steel.

MIL-S-13518 —Sealer, Surface, Wood Preservative.

STANDARDS

FEDERAL

Fed. Test Method Std. No. 151—Metals; Test Methods.

Fed. Std. No. 595—Colors.

MILITARY

MIL-STD-105 —Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 —Marking for Shipment and Storage.

MIL-STD-130 —Identification Marking of U.S. Military Property.

FSC 7125

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z.
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY NATICK LABORATORIES

5–8–138—Cabinet, Storage, Preservation and Packaging Equipment; Type I, Class 1.

5–8–139—Cabinet, Storage, Preservation and Packaging Equipment; Type II.

5–8–140—Cabinet, Storage, Preservation and Packaging Equipment; Type I, Class 2.

Note. Miniature copies of Drawings 5–8–138, 5–8–139, and 5–8–140, identified as figures 1, 2, and 3 are attached for information purposes only.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 **Other publications.** The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S. DEPARTMENT OF COMMERCE

Commercial Standard CS45–60—Douglas Fir Plywood.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D.C.)

3. REQUIREMENTS

3.1 **Preproduction sample.** Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished commodity shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the production items.

3.2 **Materials.** Materials specified shall conform to the applicable specifications and requirements specified herein. Materials not definitely specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.2.1 *Plywood.* Plywood used in the construction of the type II cabinet shall be Douglas Fir, interior type, grade B–D or better, sanded two sides, conforming to Commercial Standard CS45–60. This plywood shall be ¾ inch thick nominal.

3.2.2 *Sheet steel.* Sheet steel shall be cold-rolled; or hot-rolled, pickled and oiled, of the quality normally used in high grade commercial steel storage cabinets. The steel shall have an inside radius of not more than 1/16 inch and shall show no crystallization, cracks, or fracture on the outside of a 180 degree cold bend when tested as specified in 4.4.1.

3.2.3 *Sealer.* Sealer used on the type II cabinet shall conform to type I or II of Specification MIL–S–13518.

3.2.4 *Primer.* Primer shall be white or gray conforming to Specification TT–P–659.

3.2.5 *Enamel.* Enamel shall conform to Specification TT–E–529. The color shall be Green, No. 24533 of Fed. Std. No. 595 in the pertinent class as follows:

Class A for type II cabinets
Class B for type I cabinets

3.3 **Construction.** The construction of all components and assemblage of the cabinets covered herein shall conform to the requirements of this specification and the design, details, dimensions, and materials shown on Drawing 5–8–138, 5–8–139, 5–8–140 as applicable. At the option of the manufacturer, type I cabinets may be spot welded. The spot welds shall not exceed 3 inches on centers. Type II cabinets, except the shelves, shall be completely assembled by gluing and nailing in accordance with good industry practice.

3.3.1 *Hardware.* Hardware shall conform to the requirements shown on drawings and as hereinafter specified.

3.4 **Finish.**

3.4.1 *Type I cabinets.* All exterior and unplated surfaces of the type I cabinets shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

be cleaned and prepared for painting in accordance with any method and type of Specification TT–C–940. Surfaces shall then be coated with metal primer specified in 3.2.4, except that primer may be omitted from any surface prepared in accordance with type I, II or III Specification TT–C–490. The primed surfaces shall then be coated with the applicable class enamel specified in 3.2.5. The finish coat shall level out to produce a smooth, uniform surface without runs, wrinkles, grit, areas of no film, and separation of color.

3.4.2 *Type II cabinets.* All interior and exterior wood surfaces shall be given a coat of wood sealer specified in 3.2.3. All exterior surfaces of the cabinets, the hold down angles, and the interior of the doors shall be given a coat of primer specified in 3.2.4. All primed surfaces shall be coated with the applicable class enamel specified in 3.2.5. The finish coat shall level out to produce a smooth, uniform surface without runs, wrinkles, grit, areas of no film, and separation of color.

3.5 **Marking for identification.** Each cabinet shall be marked in accordance with Standard MIL–STD–130. The marking shall be stencilled in a plain and legible manner on the outside back of the cabinet with black waterproof stencil ink or paint. Alternatively a decal or metal identification plate may be used.

3.6 **Workmanship.**

3.6.1 *Steel fabrication.* Steel used in the fabrication of the cabinets shall be free from kinks and sharp bends. Bends shall be free from cracks and all burrs and sharp edges shall be removed. Straightening of material shall be done by methods that will not cause injury to the metal. Shearing or sawing shall be done neatly and accurately. Corners shall be square and true. All bends of a major character shall be made with metal dies or fixtures in order to insure uniformity of size and shape.

3.6.2 *Riveting.* Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall completely fill the hole and rivet heads shall be in full contact with the metal surfaces.

3.6.3 *Welding.* The surfaces of parts to be welded shall be free from oxide, scale, paint, grease and other foreign matter. The welds shall be continuous, sound, smooth and free from porosity, cracks, incomplete fusion and deformation of material. Spot welds shall conform to the requirements specified in Specification MIL–W–12332. All scale and flux deposits (when flux is used) shall be removed from the finished welds.

4. QUALITY ASSURANCE PROVISIONS

4.1 **Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and surfaces conform to prescribed requirements.

4.2 **Preproduction sample inspection.** When a preproduction sample is required, the preproduction sample shall be examined for defects in 4.3.3.1 and dimensions specified.

4.3 **Sampling for inspection and acceptance.** Sampling for inspection shall be performed in accordance with the provisions set forth in Standard MIL–STD–105, except where otherwise indicated.

4.3.1 *Inspection of materials and components.* In accordance with 4.1, the supplier is responsible for insuring that the components and the materials used are manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or if none, in accordance with this specification.

4.3.2 *In-process inspection.* Inspection shall be made at any point or during any phase of the manufacturing process to determine

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

TABLE I. *Visual examination*

Examine	Defect	Classification	
		Major	Minor
Finish, Type I and II	Not type or color specified		X
	Runs, wrinkles, grit, areas of no film, separation of color or finish not smooth.		X
	Sags, orange peel, poor adhesion; i.e., peeling, blistered, or flaky		X
Construction, Type I	Any sharp edge or bur	X	
Rivets (when applicable)	Two or more rivets missing	X	
	One rivet missing		X
	Not peened smooth, cocked, or loose		X
Welding (when applicable)	Not type specified	X	
	Missing, incomplete	X	
	One or more spots missing or broken	X	
	Spot welding not spaced as specified	X	
	Burnt holes, cracked, fractured, not fused	X	
	Slag inclusion, undercut	X	
	Not smooth, scale not removed		X
	Excess weld		X
Doors	Catch missing	X	
	Catch does not hold door closed	X	
	Does not open or close properly or hinge binds	X	
Cabinet pull knob	Missing	X	
	Lockwasher missing	X	
	Stripped threads	X	
	Loose		X
	Knob not tight against door, i.e., cocked over		X
Components, Type I and II	Any missing	X	
	Malformed, bent, or cracked	X	
Construction, Type II	Screw missing on steel top		X
	Steel top loose	X	
	Steel top warped or bent	X	
	Hold down hole missing in bottom steel angle	X	
	Bottom steel angle loose		X
	Screw missing in bottom steel angle		X
	Wood batten loose or not level		X
	Shelf not removable or excessive side play		X
	Nail not driven down or is bent over		X
	Not glued		X
Doors	Will not close properly; i.e., hinge binds	X	
	Cupboard turn will not keep door latched or door too loose in latched position.	X	
	Screw missing in hinge		X
	Cupboard turn not fastened to door and frame at six points		X
	Not flush with cabinet		X
Identification marking	Incomplete, illegible, wrong location, or missing		X

whether the required operations are accomplished as specified. Whenever nonconformance is noted, correction shall be made to affected items and lot in process.

(a) Metal surface preparation. Cleaning and conditioning of metal parts for painting is accomplished as specified in 3.4.1.

(b) Wood surface preparation. Wood surfaces coated with sealer as specified in 3.4.2.

(c) Priming of metal and wood. Metal

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

and wood surfaces coated with primer as specified in 3.4.1 and 3.4.2.

4.3.3 *Inspection of end items.* For sampling purposes, the lot shall be expressed as the number of cabinets offered for acceptance at one time. The sample unit for this examination shall be one complete cabinet of each type and class.

4.3.3.1 *Visual examination.* Examination of the cabinets shall be in accordance with the classification of defects in table I. The inspection level shall be II and the AQL shall be 2.5 for major defects with a total of 6.5, expressed in terms of defects per hundred units.

4.3.3.2 *Dimensional examination.* Inspection shall be made of cabinets for compliance with dimensions specified. Any deviation from specified dimensions shall constitute a defect. The inspection level shall be S-2 and the AQL 4.0, expressed in terms of defects per hundred units.

4.3.4 *Examination of preparation for delivery.* An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

Examine	Defect
Markings, exterior and interior.	Omitted; incorrect; illegible; of improper size, location sequence or method of application.
Materials	Component missing, damaged or otherwise defective.
Workmanship	Inadequate application of components such as waterproofing, metal stitching, cushioning, incomplete closure of container flaps, loose strapping, bulging or distortion of containers.

4.4 Test.

4.4.1 *Cold bend test.* The sheet steel under test shall be tested in accordance with Method 231 of Federal Test Method Standard No. 151. A slight granulation of the surface at the point of greatest deformation shall not be cause for rejection.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.* Projecting pull knobs shall be removed from the doors of the type I cabinets and reinstalled on the inside of the cabinet door in the reverse position. Removable shelves in the type II cabinets shall be placed in the bottom of the cabinet and secured in such a manner as to prevent movement or damage while in transit.

5.1.2 *Level C.* Cabinets shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Level A.*

5.2.1.1 *Type I, class 1 cabinets.* Each type I, class 1 cabinet, packaged as specified in 5.1, shall be packed in a crate conforming to style C of Specification MIL-C-132. The cabinet shall be waterproofed, and the crate closed and strapped in accordance with the appendix of the crate specification. Cushioning material shall be used as necessary to prevent marring of the cabinet finish.

5.2.1.2 *Type I, class 2 and type II cabinets.* Each type I, class 2 or type II cabinet, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class 2, V3c or V3s, style RSC of Specification PPP-B-636, except that weight and dimensional limitations shall be waived. Fiberboard inserts of cushioning material shall be used to provide clearance between projecting parts of the cabinet and the interior surfaces of the shipping container. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat steel strapping or tape banding in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T19:06Z
Check the source to verify that this is the current version before use.

5.2.2 *Level B.*

5.2.2.1 *Type I, class 1 cabinets.* Each type I, class 1 cabinet, packaged as specified in 5.1, shall be packed in a crate conforming to style C of Specification MIL–C–132. Cushioning material shall be used as necessary to prevent marring of the cabinet finish. The crate shall be closed and strapped in accordance with the appendix of the crate specification.

5.2.2.2 *Type I, class 2 and type II cabinets.* Each type I, class 2 or type II cabinet, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type I or II, class 1, style RSC of Specification PPP–B–636, except that weight and dimensional limitations shall be waived. The minimum bursting strength of the fiberboard shall be 275 p.s.i. Fiberboard inserts or cushioning material shall be used to provide clearance between projecting parts of the cabinet and the interior surfaces of the shipping container. All flaps of the fiberboard shipping container shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps, or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive.

5.2.3 *Level C.* Cabinets, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 **Marking.** In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Standard MIL—STD–129.

6. NOTES

6.1 **Intended use.** The cabinets covered by this specification are primarily intended to be used as components of Corps of Engineers Preservation and Packaging Equipment Sets No. 1, No. 2, and No. 3. Sets No. 1 and No. 3 are mounted in van bodies and are used in the preservation and depreservation of equipment in the field. Set No. 2 is issued unmounted.

6.2 **Ordering data.** Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and class of cabinet (see 1.2).
(c) Whether preproduction sample is not required (see 3.1).
(d) Selection of applicable levels of packaging, and packing (see 5.1 and 5.2).

6.3 **Transportation description.** The transportation description and minimum weight applicable to this item are:

RAIL:
Cabinet, Storage: Preservation and Packaging Equipment.
Carload minimum weight 20,000 pounds subject to Rule 84, Uniform Freight Classification.

MOTOR:
Cabinet, Storage: Preservation and Packaging Equipment.
Truck minimum weight 20,000 pounds subject to Rule 115, National Motor Freight Classification.

Custodian:
Army—GL
Interested activity:
Review:
Army—MO
User:
Army—SM

Preparing activity:
Army—GL
Project No. 7125–A027

Note. Reviewer and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing Of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

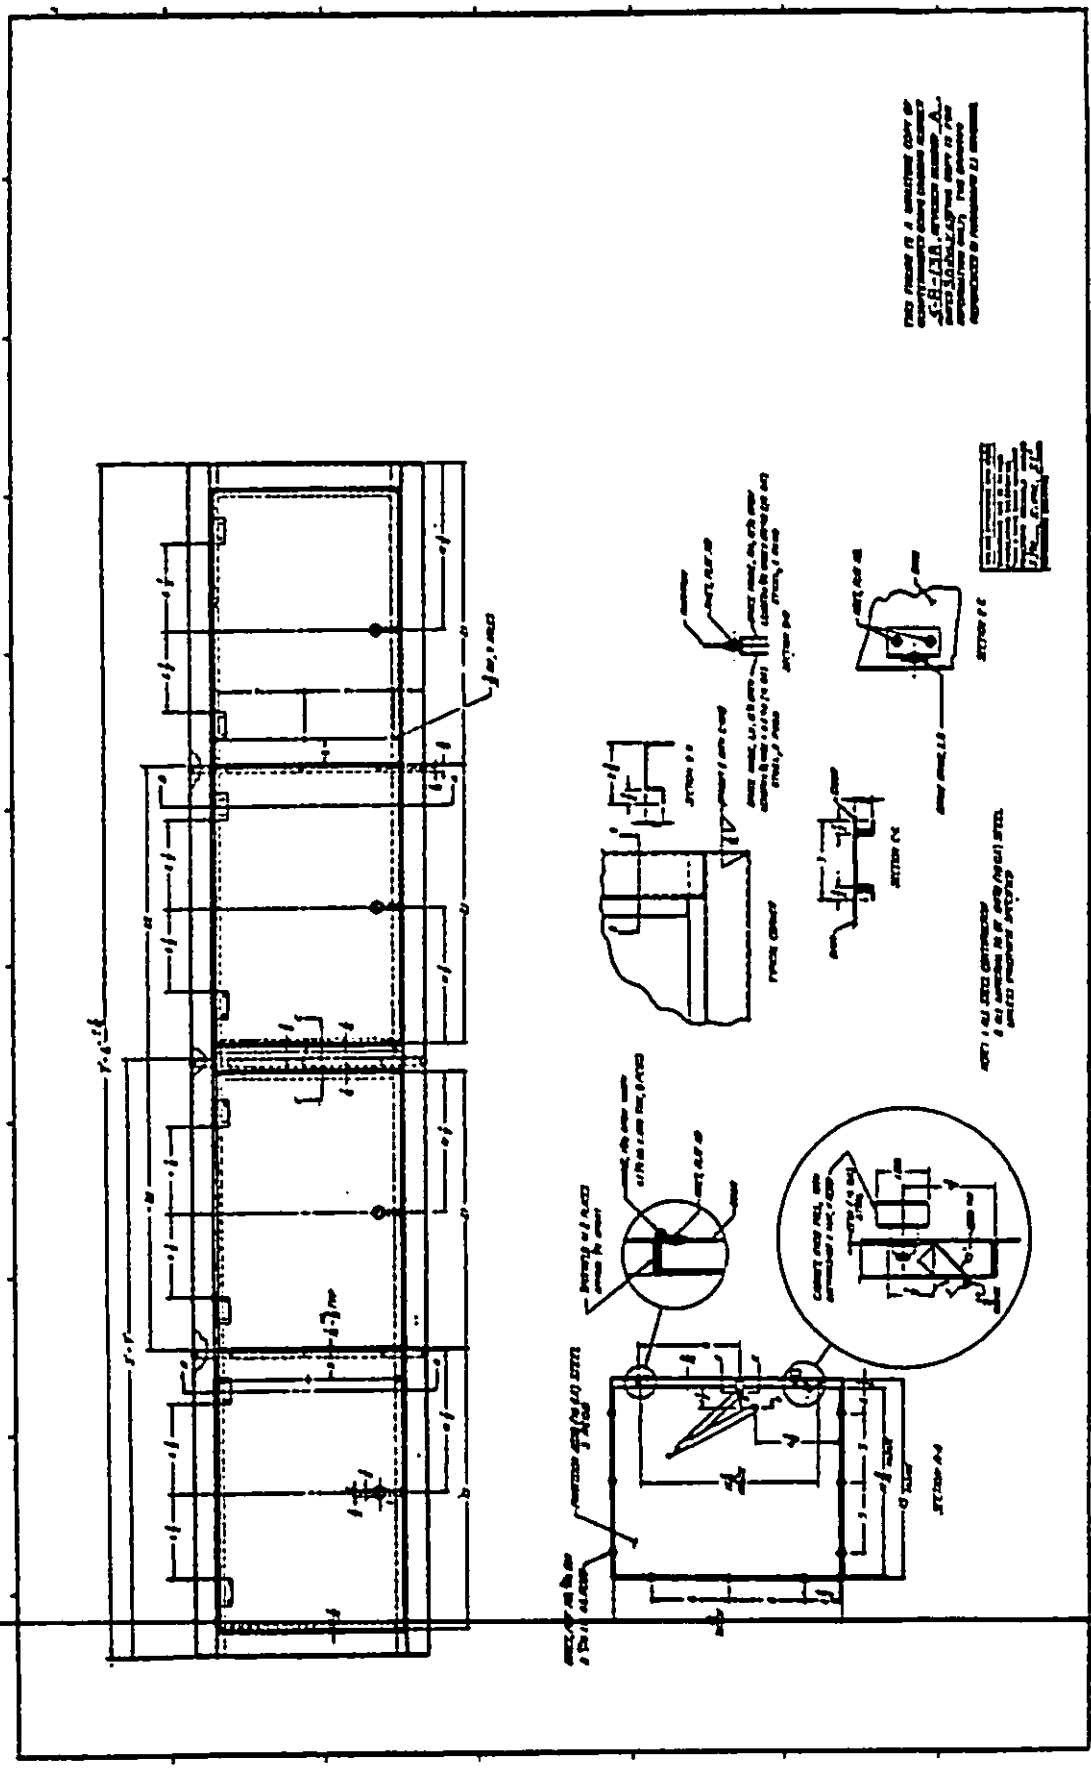


FIGURE 1. *Cabinet, storage, preservation and packaging equipment: type I, class 1.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

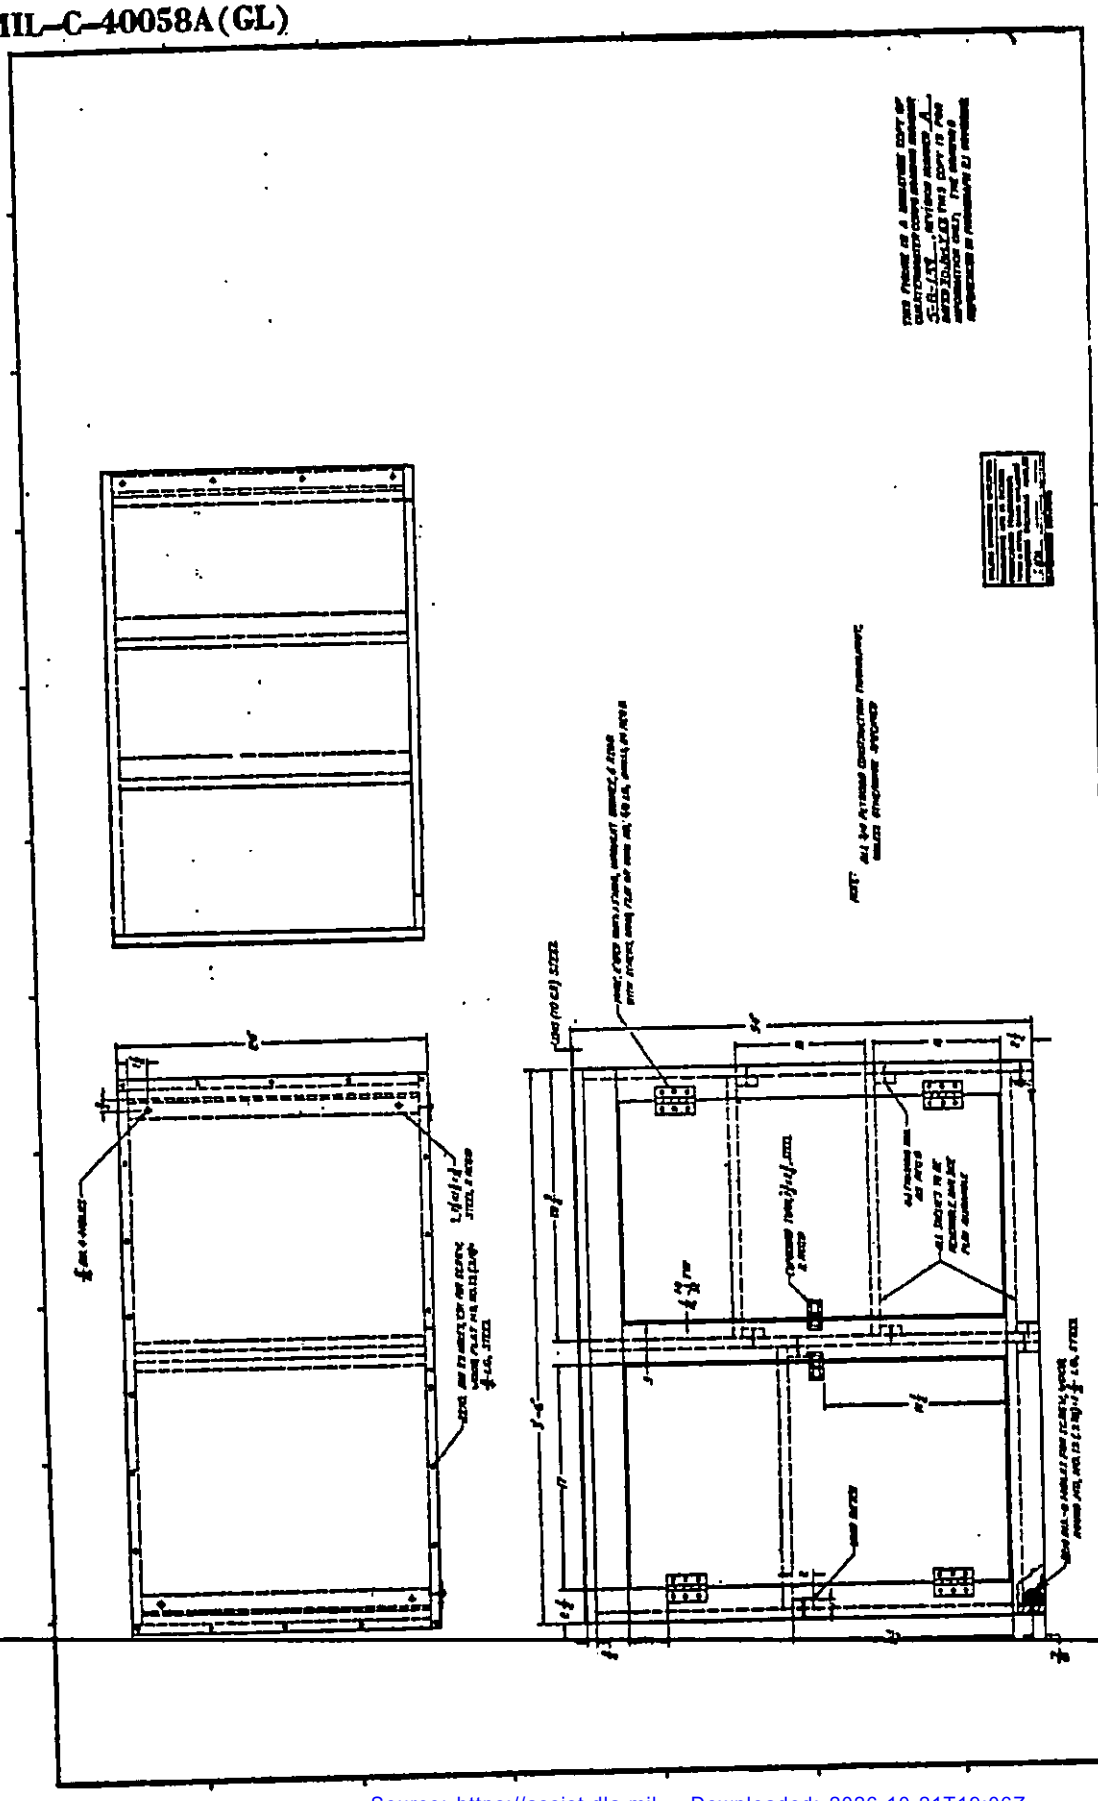


FIGURE 2. *Cabinet, storage, preservation and packaging equipment; type II.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

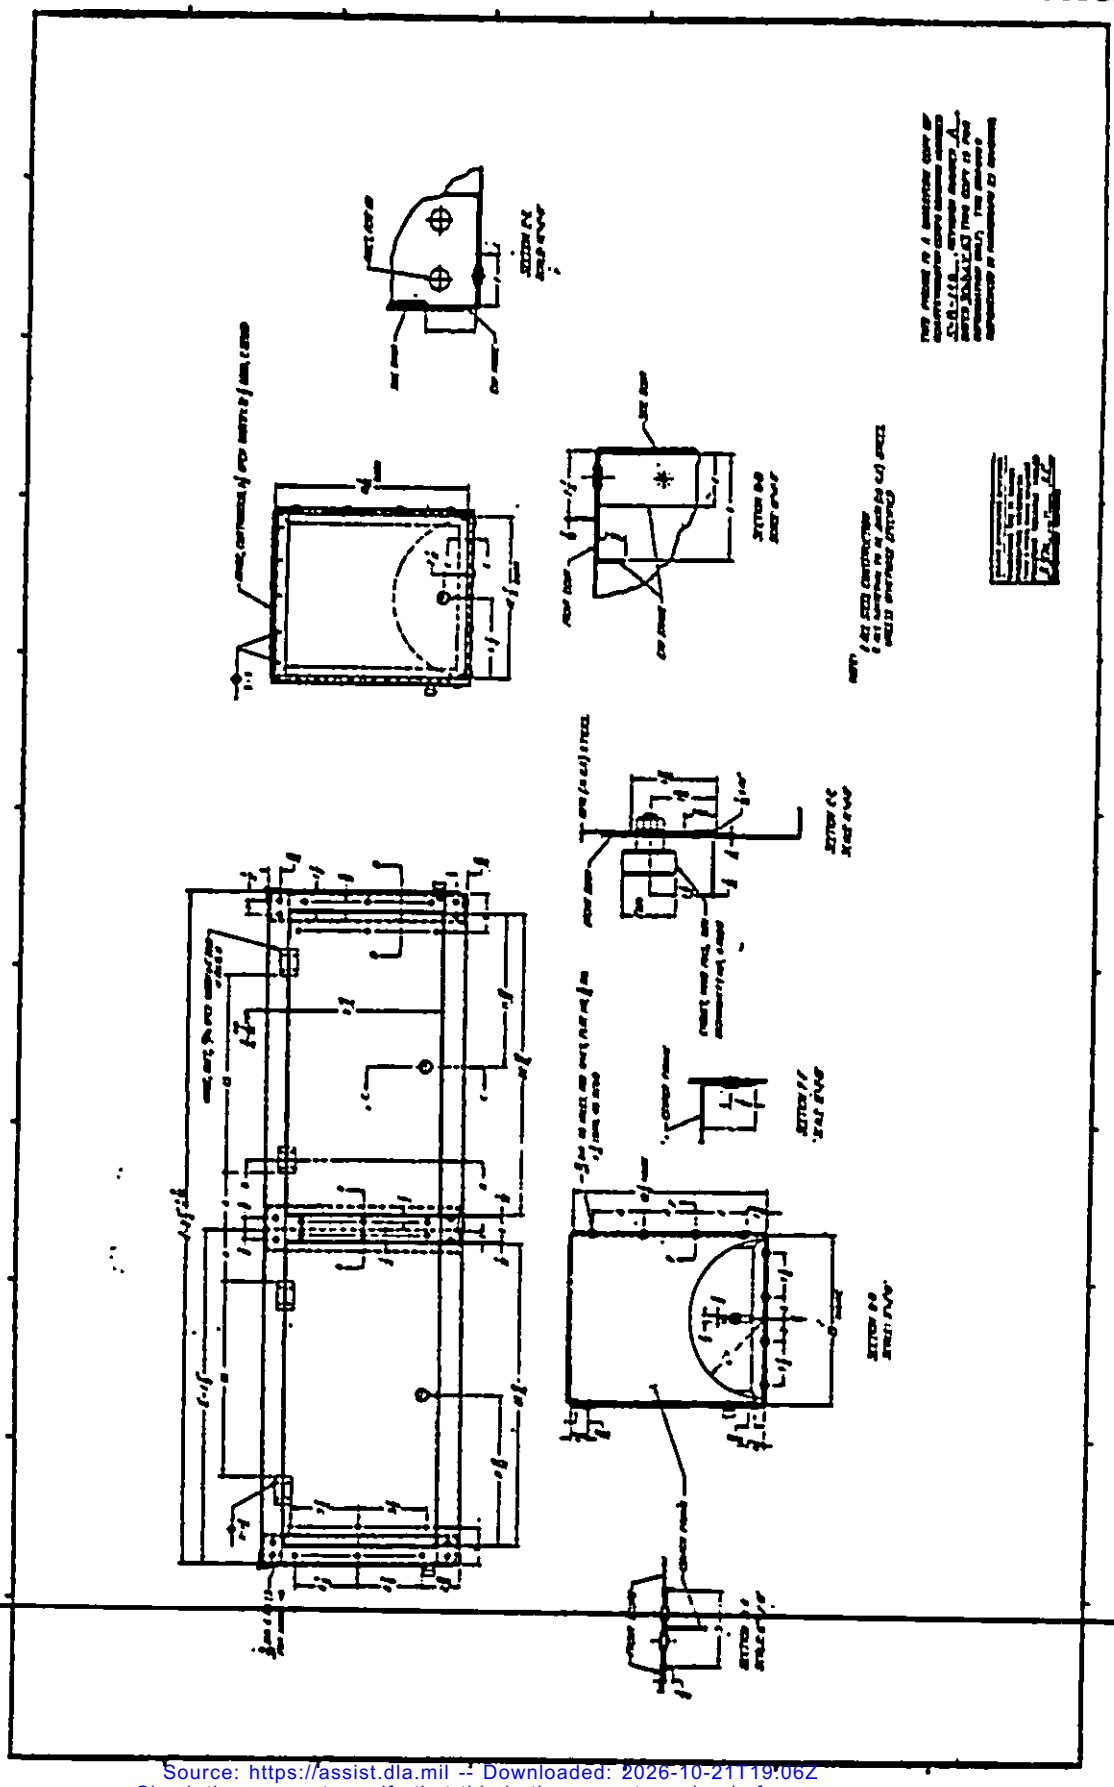


FIGURE 8. *Cabinet, storage, preservation and packaging equipment; type I class 2.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.