MIL-C-40060C(GL)

30 December 1970
SUPERSEDING
MIL-C-40060B(GL)
18 March 1968
(see 6.4 and 6.5)

MILITARY SPECIFICATION

CABINETS, STORAGE, STEEL; MAP REPRODUCTION, PHOTOMAPPING, AND SURVEYING EQUIPMENT: GENERAL SPECIFICATION FOR

1. SCOPE

1.1 Scope.- This specification covers the general requirements for cabinets, storage, steel for van mounting. Specific requirements for a particular type and class storage cabinet are covered by the applicable specification sheet MIL-C-40060C/1(GL) through MIL-C-40060/22(GL) (see 6.5).

1.2 Classification.-

1.2.1 Types and classes.- The types and classes shall be as designated in specification sheet for each cabinet.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

* SPECIFICATIONS

FEDERAL

QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon
QQ-S-766	-	Steel, Plate, Sheet and Strip, Corrosion-Resisting
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings
TT-E-529	-	Enamel, Alkyd, Semi-Gloss
TT-P-659	-	Primer-Coating and Surfacers; Synthetic, Tints and White (for Metal and Wood Surfaces)

FSC 7125

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

MMM-A-181 - Adhesive, Room-Temperature and Intermediate-Temperature Setting, Resin (Phenol, Resorcinal and Melamine Base)
MMM-A-188 - Adhesive; Urea-Resin Type (Liquid and Powder)
PPP-B-601 - Box, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Box, Fiberboard

MILITARY

MIL-P-5425 - Plastic, Sheet Arcylic, Heat Resistant
MIL-L-10547 - Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible

STANDARDS

FEDERAL

FED-STD-595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following publications form a part of this specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposal, shall apply.

UNITED STATES DEPARTMENT OF COMMERCE

Commercial Standard CS35 - Hardwood Plywood

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

NATIONAL ELECTRICAL MANUFACTURERS' ASSOCIATION

Publication LD-1-1964 - Laminated Thermo-Setting Decorative Sheets

(Application for copies should be addressed to the National Electrical Manufacturers' Association, 155 E. 44th Street, New York, New York 10017.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

D2016-65 - Standard Methods of Test for Moisture Content of Wood

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article.- This specification contains provisions for first article test and approval (see 4.2, 6.2, and 6.3).

3.2 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for steel storage cabinets, provided the completed item complies with all the provisions of this specification.

3.2.1 Steel.-

3.2.1.1 Steel, low carbon sheet and strip.- Sheet and strip low carbon steel shall conform to any temper, quality, finish, or edge of QQ-S-698.

3.2.1.2 Steel, plate, sheet and strip corrosion-resisting.- The corrosion-resisting steel plate, sheet, and strip shall conform to QQ-S-766.

3.2.2 Primer.- Primer shall be white or gray conforming to TT-P-659.

3.2.3 Enamel.- Enamel shall conform to class B of TT-E-529. The color shall be gray, No. 26134 of FED-STD-595.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:07Z
Check the source to verify that this is the currentversion before use.

* 3.2.4 Hardwood plywood panels.- Hardwood plywood panels using all hardwood veneers shall be 5 ply minimum and shall be constructed in accordance with type II, grade 1 or 2 of Commercial Standard CS35.

* 3.2.5 Laminated, thermo-setting, decorative sheet.- The laminated, thermo-setting, decorative sheet shall be not less than 1/16 inch thick and shall conform to type I (general purpose type) of National Electrical Manufacturers' Association Publication LD-1-1964. The surface of the sheet shall have a satin finish. The color shall be as specified (see 6.2).

* 3.2.6 Adhesive, room-temperature and intermediate-temperature setting resin.- Room-temperature and intermediate-temperature setting resin adhesives shall conform to any type, grade, and class of MMM-A-181. Alternatively, the adhesive may be of a thermosetting vinyl emulsion type which meets the shear strength by compression loading, plywood shear strength (both wet and dry) and pH requirements of MMM-A-181.

* 3.2.7 Adhesive; urea-resin type.- The urea-resin type adhesive shall conform to either type I or III of MMM-A-188. Alternatively, the adhesive may be of a thermosetting vinyl emulsion type which meets the block shear strength, tension loading strength (both wet and dry) and pH requirements of MMM-A-188.

3.3 Construction.- The cabinets shall be fabricated as shown on the applicable specification sheet, and as specified herein. The cabinets shall be fabricated of steel specified in 3.2.1.1 and 3.2.1.2, as applicable. The sheet steel for the cabinets shall be 0.0359 inch thick, 20 gage, except as otherwise indicated. All joints shall be welded, riveted, or bolted. Bolted sections shall be provided with lock washers. Areas to be welded shall be clean and free of sand, dirt, scale, and oil prior to welding. All components of the cabinet body shall have reinforcing panels, channels, or sections so as to provide a compact, rigid and stable structure. Tolerances shall be plus or minus 1/32 inch for dimensions other than thickness of material, except as otherwise indicated.

3.3.1 Hardware.- All miscellaneous hardware, such as screws, bolts, rivets, nuts and lockwashers shall be zinc or cadmium plated in accordance with the manufacturer's commercial practice.

3.3.2 Doors.-

3.3.2.1 Doors, swinging.- The swinging doors shall have flanged edges and a flanged reinforcing panel not less than 4 inches wide not including the flange edges. The reinforcing panel shall extend from top to bottom in the center of the door. Doors shall be fitted and aligned in both the open and closed position.

3.3.2.2 Doors, sliding.- The sliding doors shall operate on ball bearing, roller suspension, or fixed track without binding or sticking. The ball bearing rollers shall be hardened steel and cadmium plated. Sliding doors shall be mounted to withstand shock and vibration without opening or slipping from the track when tested in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

3.3.3 Hinges.-

3.3.3.1 Flush or mortise.- Hinges shall be the flush or mortise type as shown on figures of applicable specification sheet, made from corrosion-resistant treated wrought steel. Each door shall be supported on hinges, welded or riveted in place. Hinges shall be true parallel and shall not bind when closing or opening the door. Hinges shall permit the door to open fully.

3.3.3.2 Continuous.- Hinges shall be continuous type with brass pins. The hinges shall be attached by spot welding or riveting. The hinges shall not bind when opening and closing.

3.3.4 Latching mechanisms.- A latching mechanism, when required, shall be installed on the doors to keep the doors closed under shock and vibration (see 4.4.1).

3.3.4.1 Push button catches.- The pushbutton catches (see figure A) shall not become disengaged with the keepers when tested in accordance with 4.4.1.

3.3.5 Shelves.- Shelves shall be adjustable, nonadjustable, or removable as specified in applicable specification sheet. Shelves shall run full depth of cabinet interior. Unless otherwise specified in the applicable specification sheet, shelves shall be flanged downward on all four edges and into a box formation at the front edge. Nonadjustable shelves shall be welded or riveted to the cabinet walls. When tested as specified in 4.4.1, the cabinets and shelves shall show no permanent deformation, sags, cracks, or distortion of any components, and the shelves shall not disengage.

3.3.6 Card holders.- Card holders for doors and drawers where required shall be as shown on figure B.

3.3.7 Drawers.- Except where otherwise specified on the specification sheets, all drawers shall be full depth of the cabinet. Drawers shall be equipped with false fronts, stiffeners, and runners. Automatic stops shall be provided to prevent drawers from accidently coming out, when pulled to the extended position, but shall permit the drawers to be removed intentionally. The opening of the drawers shall be limited by stops to approximately 2/3 of the drawer depth. Drawers shall open and close without binding or sticking. Each drawer shall be fitted with one or more spring loaded, positive latches, as applicable.

3.3.7.1 Drawer pulls.- Drawer pulls shall be of steel and shall be cadmium plated.

* 3.3.8 Cabinet tops.- Cabinet tops, when required, shall be covered with plywood panels specified in 3.2.4. A laminated, thermosetting, decorative sheet specified in 3.2.5 shall be bonded to the top surface of the plywood panel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

At time of bonding, the moisture content of the plywood panel shall be from 5 to 9 percent as determined in accordance with 4.3.2.2. All bonding shall be in accordance with 3.3.9. The edges of the plywood panel shall be edged with molding. No seams or joints shall appear on the face surfaces of the laminated, thermo-setting, decorative sheets. All edges shall be beveled or chamfered. The face surfaces of the laminated, thermo-setting, decorative sheets shall be free from mars, patched, blistered or rough areas; chips, cracks, pin holes, and scratches. When viewed at a distance of 5 feet, discoloration, spotting, streaking, staining, surface waviness, swells, lapping of printed layer, depression, mold marks, plywood imperfections, and grain shall not be visible in the laminated, thermo-setting, decorative sheet. There shall be no warp greater than 1/8 inch in length or width of the cabinet top.

3.3.9 Gluing.- Adhesive specified in 3.2.6 or 3.2.7 shall be used for bonding plastic sheets to plywood panels. Open and closed assembly time and pressure shall be in accordance with the adhesive manufacturer's recommendations.

3.4 Finish.- All exterior and interior unplated metal surfaces, except corrosion-resisting steel surfaces of the cabinets, including hinges, shall be cleaned or treated in accordance with any method or type of TT-C-490. All prepared surfaces shall be coated with primer specified in 3.2.2. The primed surfaces shall then be coated with enamel specified in 3.2.3 and baked for the time temperature cycle recommended by the enamel manufacturer. The finish coat shall level out to produce a smooth, uniform surface without runs, wrinkles, grit, areas of thin film or no film and separation of color. Primer may be omitted from any surface prepared for painting in accordance with TT-C-490, provided the dry enamel thickness averages not less than 1 mil and no reading is less than 0.7 mil.

3.5 Marking for identification.- The manufacturer shall permanently and legibly mark his name or trademark of such known character as to be identifiable to the manufacturer on the outside back of the cabinet.

3.6 Workmanship.- The cabinets shall be free of dents and fractures and shall show no evidence of warping or misalignment. The cabinets shall have no malformed, split, cracked, broken, or missing components. All edges shall be rounded or beveled. All parts, components, and assemblies of the cabinet including stampings, moldings, and welded parts, shall be clean and free from sand, dirt, fins, pits, sprues, scale, flux, oil, and imbedded foreign matter. Punched or drilled holes shall have the burrs removed. Rivets shall be clinched or peened to provide smooth interior surfaces. All the welds shall be smooth and free from pits, flashes, cracks, and burn through.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsiblity for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects in table II, dimensions specified, and tested as specified in 4.4.1. The presence of any defects, any dimension not within specified requirements, or failure to pass test shall constitute failure of first article.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 Process inspection.-

* 4.3.2.1 Process examination.- Examination shall be made during the manufacturing process for conformance to the requirements specified in table I. Whenever nonconformance is noted, correction shall be made to affected items and process.

TABLE I.- Process inspection

Requirement	Requirement paragraph
Areas to be welded	
Clean and free of dirt, sand, scale and oil prior to welding	3.3
Surface preparation	
Cleaning and conditioning of metal surfaces for painting	3.4
Priming of metal	
Metal surfaces coated with primer	3.4
Application of adhesive	3.9

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

* 4.3.2.2 Moisture content.- Moisture content of plywood panels specified in 3.3.8 shall be determined in accordance with ASTM-D-2016-65. The lot shall be all plywood panels offered for inspection at one time. The sample unit shall be one plywood table top. Sample units shall be obtained from each lot of plywood panels. A minimum of three determinations shall be made on one plywood sample piece, one near the edge of each unit and one at the center. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0 defects, expressed in terms of defects per hundred units.

4.3.3 End item inspection.- The lot shall consist of all completely fabricated cabinets of the same type and class, as applicable, offered for inspection at one time. The sample unit shall be one completely fabricated cabinet.

4.3.3.1 Visual examination.- Examination shall be made of the end item for defects in table II for the type or type and class cabinets furnished as applicable. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects, and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not type or class specified	X	
	Color not as specified	X	
	Area of no paint	X	
	Contains streaks, runs, drops, grit, or wrinkles		X
	Dirt or other foreign matter imbedded in finish		X
Construction	Any sharp edge or burr	X	
	Cabinet body panel not reinforced	X	
	Cabinet joint not joined as specified		X
	Lockwasher missing at bolted section, as applicable		X
	Weld missing, not smooth, and not free from pits, flashes, cracks, and burn through	X	
	Any component not as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction (cont'd)	Any components missing, malformed, split, cracked, or broken	X	
	Mounting plate or strip missing, when required	X	
	Keyhole not cut or punched out in the back wall of cabinet and through strip or plate, when applicable	X	
	Doors not equipped with flanged edges and a flanged reinforcing panel, when applicable	X	
	Reinforcing panel does not extend from top to bottom in center of door, when applicable		X
	Doors not fitted and aligned in both open and closed positions	X	
	Rubber corners not secured to the cabinet with metal screws and washer retainers, when specified		X
	Retaining rods not removable when required	X	
	Retaining rods interfere with opening and closing of doors	X	
	Drawers stick or bind when open or closed		X
	Drawers not equipped with false fronts and stiffeners, runners, or stops	X	
	Knobs on doors do not operate latching mechanism	X	
	Shelf not adjustable, removable, or non-adjustable, as specified	X	
	Drawers do not open approximately 2/3 of the depth of the drawer	X	
	Drawers open without releasing latch or latches	X	
	Means not provided for the removal of drawer, when required	X	
	Sliding doors bind or stick		X
Identification marking	Incomplete, illegible, wrong location, or missing		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

4.3.3.2 Dimensional examination.- Examination shall be made of the cabinets for compliance with dimensions specified. Any dimension not meeting requirements shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3.3 End item testing.- The cabinets shall be tested as specified in 4.4.1. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.3.4 Examination of preparation for delivery.- An examination shall be made to determine compliance with the packing and marking requirements of section 5. Defects shall be as indicated in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE III.- Examination of packing and marking

Examine	Defect
Marking	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as fiberboard inserts or cushioning missing, or case liner not sealed.

4.3.4.1 Examination of shipping containers.- Examination for defects in closure and strapping of shipping containers shall be in accordance with the appendix of the applicable shipping container specification.

4.4 Tests.-

4.4.1 Vibration.- Cabinet shall be rigidily mounted on a vibration machine; when applicable, shelves shall have a load totalling 25 pounds equally distributed on each shelf. The doors and the drawers shall be secured by means of the closure devices provided. The cabinet shall then be subjected to vibration with an amplitude of 1/16 inch (1/8 inch total excursion) at a frequency range of 600 cycles per minute, for a period of 1 hour, in the direction of the vertical axis. Any nonconformance with requirements specified in 3.3.2.2, 3.3.4, 3.3.4.1, and 3.3.5 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A.- Each cabinet shall be packed in a snug-fitting, fiberboard, cleated plywood, or nailed wood shipping container conforming to style RSC, grade V2s of PPP-B-636, except that weight and dimensional limitations shall not be exceeded; overseas type of PPP-B-601; or class 2, style 2 or 4 of PPP-B-621, respectively. Fiberboard inserts shall be positioned on the face of the cabinet to provide a minimum 1/2 inch clearance between projecting components of the cabinet and the interior surfaces of the shipping container. For cleated plywood and nailed wood shipping containers, the top and sides of each cabinet shall be covered with fiberboard pads or other cushioning material, and each container shall be provided with a type I or II grade C case liner conforming to MIL-L-10547. Each fiberboard shipping container shall be waterproofed by means of tape in accordance with the appendix of PPP-B-636. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.1.2 Level B.- Each cabinet shall be packed as specified in 5.1.1, except that shipping containers shall conform to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636, except that weight and dimensional limitations shall not be exceeded; domestic type, style A or B of PPP-B-601; or class 1, style 2 or 4 of PPP-B-621; and case liner and waterproofing of fiberboard shipping containers shall not be required.

5.1.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

5.1.3 Level C.- Cabinets shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.2 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The cabinets are intended for use in vans for storage of map reproduction, surveying, and photomapping equipment and supplies.

6.2 Ordering data.- Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

(a) Title, date and number of this specification and applicable specification sheet.
(b) Type and class of cabinet required.
(c) First article (see 3.1, 4.2 and 6.3).
(d) Color of laminated decorative sheet required (see 3.2.5).
(e) Selection of applicable level of packing (see 5.1).
(f) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.1.2.1).

* 6.3 First article.- The item covered by this specification requires first article test and approval under the appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulations. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination, test, and approval of the first article.

6.4 Supersession data.- The following cabinets cited in Corps of Engineers purchase descriptions noted have been included in the following specification sheets.

Cabinet Type	Corps of Engineers Purchase Descriptions	Specification Sheet
Type XV	PD-344A	MIL-C-40060/15(GL)
Type XVI	PD-347A	MIL-C-40060/16(GL)
Type XVII	PD-368A	MIL-C-40060/17(GL)
Type XVIII	PD-401	MIL-C-40060/18(GL)
Type XIX	PD-402	MIL-C-40060/19(GL)
Type XX	PD-447	MIL-C-40060/20(GL)
Type XXI	PD-449	MIL-C-40060/21(GL)
Type XXII	PD-452	MIL-C-40060/22(GL)

6.5 The following specification sheets have been issued for type I through type XXII storage steel cabinets previously covered by MIL-C-40060B and Corps of Engineers Purchase Description referenced in 6.4.

MIL-C-40060/1(GL)	Cabinet, Storage Steel, Map Reproduction, Double Door, Wall; Type I
MIL-C-40060/2(GL)	Cabinet, Storage Steel, Map Reproduction, Single Door, Wall; Type II
MIL-C-40060/3(GL)	Cabinet, Storage Steel, Photomapping Equipment; Type III Class 1 - Right side opening door Class 2 - Left side opening door
MIL-C-40060/4(GL)	Cabinet, Storage Steel, General Supplies, 1-Door; Type IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.

MIL-C-40060/5(GL)	Cabinet, Storage Steel, General Supplies, 2-Door; Type V
MIL-C-40060/6(GL)	Cabinet, Storage Steel, Rolled Material; Type VI
MIL-C-40060/7(GL)	Cabinet, Storage Steel, General Supplies; Type VII
MIL-C-40060/8(GL)	Cabinet, Storage Steel, Multiplex Supplies; Type VIII
MIL-C-40060/9(GL)	Cabinet, Storage Steel, Multiplex Laboratory Supplies; Type IX
MIL-C-40060/10(GL)	Cabinet, Storage Steel, Rectifier Equipment; Type X
MIL-C-40060/11(GL)	Cabinet, Storage Steel, Photographic Paper; Type XI
MIL-C-40060/12(GL)	Cabinet, Storage Steel, Map Layout, Utility and Storage, Assembly; Type XII
MIL-C-40060/13(GL)	Cabinet, Storage Steel, Rectifier, Laboratory Supplies; Type XIII
MIL-C-40060/14(GL)	Cabinet, Storage Steel, Cartographic Supplies; Type XIV
MIL-C-40060/15(GL)	Cabinet, Storage Steel, Photolithographic Supplies, Floor, 5-Drawer; Type XV
MIL-C-40060/16(GL)	Cabinet, Storage Steel, Photolithographic Supplies, Floor, 1-Drawer, 2-Door; Type XVI
MIL-C-40060/17(GL)	Cabinet, Storage Steel, Lithographic Combination Storage and Inspection Stand; Type XVII
MIL-C-40060/18(GL)	Cabinet, Storage Steel, Photographic Supplies, Floor Assembly; Type XVIII
MIL-C-40060/19(GL)	Cabinet, Storage Steel, Photographic Supplies, Wall, Assembly; Type XIX
MIL-C-40060/20(GL)	Cabinet, Storage Steel, Bookcase, Vehicular Mounting; Type XX
MIL-C-40060/21(GL)	Cabinet, Storage Steel, Adjustable Shelves Vehicular Mounting, (for Surveying Equipment); Type XXI
MIL-C-40060/22(GL)	Cabinet, Storage Steel, Three Partitions, Vehicular Mounting, (for Surveying Equipment); Type XXII

6.6 The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - ME, NS

Preparing activity:

Army - GL

Project No. 7125-A054

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.


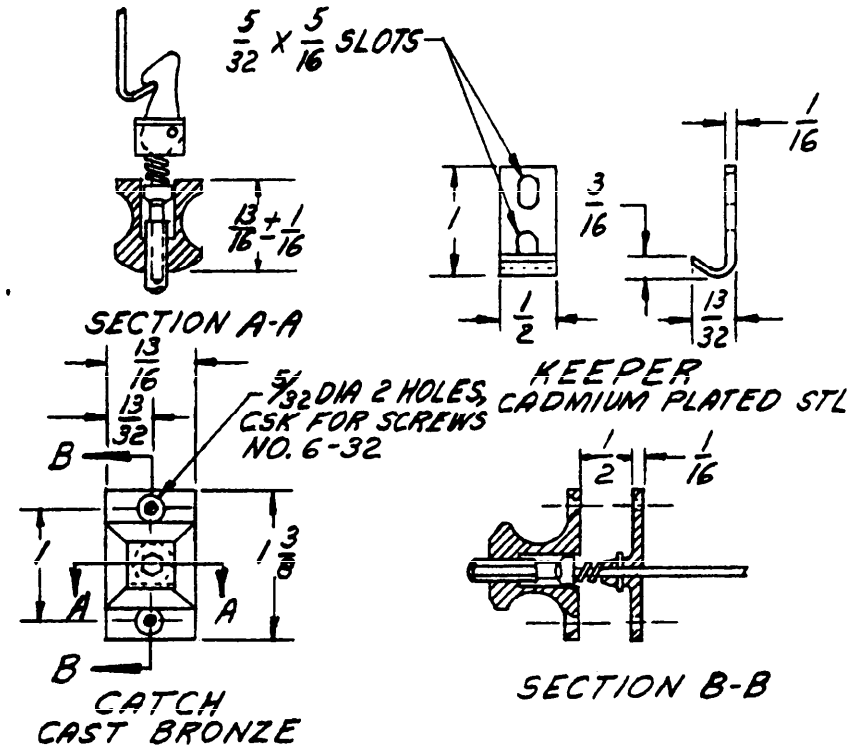


FIG. A PUSH BUTTON CATCH

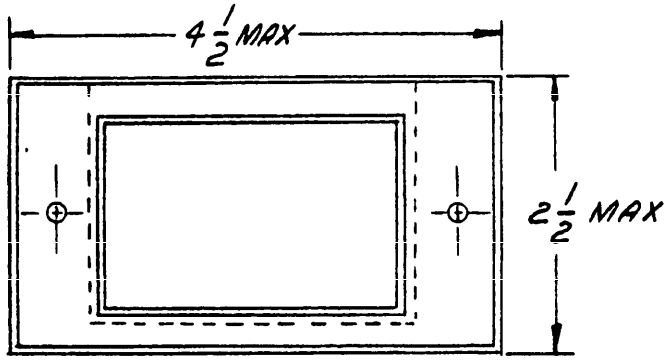

CAST ALUMINIUM, BRASS OR BRONZE CARD OPENING 2 25/32 X 1 3/8 FOR, CARD SIZE APPROX. 2 15/16 X 1 9/16

FIG. B CARD HOLDER

Source: https://assist.dla.mil -- Downloaded: 20260-21T19:07Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION Cabinets, Storage, Steel; Map Reproduction, Photomapping, And Surveying Equipment: General Specification For MIL-C-40060C(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:07Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-TD
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:07Z
Check the source to verify that this is the current version before use.