21 June 1968
SUPERSEDING
MIL-C-40009C
14 May 1965

MILITARY SPECIFICATION

CABINETS, STORAGE: REPAIR PARTS AND TOOLS

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers cabinets for the storage of repair parts and tools.

1.2 Classification.- Cabinets covered by this specification shall be of the following types and classes, as specified (see 6.2):

TYPE I - 35-1/2 inches high, 25 inches wide, 20 inches deep, (see figures 1, 2 and 3).
- Class A - 12-drawers and 1-door enclosed bin.
- Class B - 24-drawers and 1-door enclosed bin.
- Class C - 18-drawers and 1-door enclosed bin.

TYPE II - 35-1/2 inches high, 34 inches wide, 17-7/8 inches deep, 3-door enclosed shelves (see figure 4).

TYPE III - 54-1/2 inches high, 36-1/2 inches wide, 23 inches deep (see figures 5 and 6).
- Class A - 42-drawers and 4-sliding trays.
- Class B - 18-drawers and 7-open bins.

TYPE IV - 39-inches high, 46-3/4 inches wide, 23-9/16 inches deep, 14-drawers and lid enclosed top shelf (see figure 7).

TYPE V - 35-1/2 inches high, 25 inches wide, 27 inches deep, 11-drawers (see figure 8).

TYPE VI - 24 inches high, 25 inches wide, 16-3/8 inches deep, 3 expanded metal shelves (see figure 9).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bid or request for proposal, form a part of this specification to the extent specified herein:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-S-698 - Steel, Sheet and Strip, Low-Carbon.
QQ-W-461 - Wire, Steel, Carbon, (Round, Bare, and Coated).
RR-C-271 - Chain and Attachments, Welded, Weldless, and Roller Chain.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coating.
TT-E-529 - Enamel, Alkyd, Semi-Gloss.
TT-P-636 - Primer Coating, Alkyd, Wood and Ferrous Metal.
MMM-A-125 - Adhesive, Casein-Type, Water and Mold-Resistant.
MMM-A-188 - Adhesive, Urea-Resin-Type (Liquid and Powder).
* PPP-P-1010 - Packaging, Packing, and Marking: Benches, Bins, Cabinets, and Worktables; General Specification for.

MILITARY

* MIL-M-17194 - Metal, Expanded, Steel.

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130 - Identification Marking of U. S. Military Property.

DRAWINGS

ARMY NATICK LABORATORIES

5-13-2295 - Cabinets, Storage, Repair Parts and Tools: Type I, Cabinet Assembly, Class A, B and C.
5-13-2296 - Type I, Class B and C, Drawer Assembly, Size "a".
5-13-2297 - Type I, Class A and C, Drawer Assembly, Size "b".
5-13-2298 - Type I, Class B and C, Drawer Assembly, Size "c".
5-13-2299 - Type I, Class A and C, Drawer Assembly, Size "d".
5-13-2300 - Cabinets, Storage, Repair Parts and Tools: Type II, Cabinet Assembly.
5-13-2301 - Cabinets, Storage, Repair Parts and Tools: Type III, Cabinets Assembly, Class A and B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

5-13-2302 - Type III, Class A, Sliding Tray Assembly.
5-13-2303 - Type III, Class A and B, Drawer Assembly, Size "e".
5-13-2304 - Cabinets, Storage, Repair Parts and Tools: Type IV, Cabinet Assembly.
5-13-2305 - Type IV, Drawer Compartment Assembly.
5-13-2306 - Type IV, Drawer Assembly, Size "f".
5-13-2307 - Type IV, Drawer Assembly, Size "g".
5-13-2308 - Type IV, Drawer Assembly, Size "h".
5-13-2309 - Cabinets, Storage, Repair Parts and Tools: Type V, Cabinet Assembly.
5-13-2310 - Type V, Drawer Assembly, Size "j".
5-13-2311 - Type V, Drawer Assembly, Size "k".
5-13-2312 - Cabinets, Storage, Repair Parts and Tools: Type VI, Cabinet Assembly, Expanded Metal.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of the specification to the extent specified herein. Unless otherwise specified, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNITED STATES DEPARTMENT OF COMMERCE

* Commercial Standard CS 236-66 - Mat Formed Particleboard
Commercial Standard CS 251-65 - Hardboard

NATIONAL BUREAU OF STANDARDS
Handbook H28 - Screw-Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

* D 2016-62 - Standard Methods of Test for Moisture Content of Wood.

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

* 3. REQUIREMENTS

* 3.1 First article.- When specified (see 6.2), before production is commenced, a sample of the required cabinet conforming to this specification shall be-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

submitted or made available to the contracting officer or his authrorized representative for approval in accordance with 4.2. Approval of the preproduction sample authorizes commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials and components.- Materials and components shall conform to the applicable specifications, standards, and requirements specified herein and on the applicable drawings. Materials and components not specifically defined shall be as regularly used by the manufacturer.

3.2.1 Steel.-

3.2.1.1 Steel, sheet and strip.- Sheet and strip steel components shall be fabricated from hot rolled or cold rolled steel conforming to QQ-S-698.

3.2.1.2 Wire, steel.- Steel wire components shall be fabricated from No's. 1010, 1015, or 1020, finish 1, annealed steel wire conforming to QQ-W-461.

3.2.1.3 Metal, expanded, steel.- Panels for expanded metal components shall conform to type II of MIL-M-17194.

3.2.2 Wood.- Wood for the core of composite wood tops shall be low density hardwood or softwood, having a minimum rated weight of 26 pounds per cubic foot at 8 percent moisture content.

3.2.3 Hardboard.- Hardboard for cabinet top veneers shall be a minimum 1/8 inch thick, tempered type, conforming to Commercial Standard CS 251-63. The hardboard of types I and V cabinets shall be smooth on two sides. For type IV cabinets, the hardboard shall be smooth on one side.

3.2.4 Particleboard.- Particleboard for cabinet tops shall conform to Commercial Standard CS 236-66, with specific requirements as follows for the applications indicated:

a. Particleboard core - Type I, density B, class 2, sanded two sides.
b. Particleboard face and back veneers - Type I, density A, class 1 sanded two sides, 3/8 ± 1/16 inch thick.

3.2.5 Adhesives.- Adhesives for bonding cabinet tops shall conform to the following:

3.2.5.1 Adhesive, casein-type.- Casein-type adhesive shall conform to type II of MM-A-125.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

3.2.5.2 Adhesive, urea-resin-type.- Urea-resin-type adhesive shall conform to type III of MIL-A-188.

3.2.5.3 Adhesive, thermosetting vinyl-emulsion type.- Thermosetting vinyl-emulsion type adhesive shall meet the block shear strength, tension loading shear strength, both wet and dry, and pH requirements of MIL-A-188.

3.2.6 Primer.- Primer shall conform to TT-P-636.

3.2.7 Enamel.- Enamel shall conform to class A or B of TT-E-529. The color shall be olive drab color No. X24087 of Fed. Std. No. 595.

3.2.8 Chain.- Chains shall be type II, class 6, weldless, steel, zinc-coated safety chain conforming to RR-C-271.

3.3 Design and construction.- The cabinets shall conform to the requirements specified herein and on the applicable drawings referenced in 2.1. Details not specifically defined shall be in accordance with the manufacturer's regular practice. Figures 1 thru 9 are included herewith for ready identification of the various types and classes of cabinets, and to illustrate the major distinguishing features and overall dimensions applicable to each.

3.3.1 Welding.- Welding, where specified or used as an option, may be used only in fabrication of the original item and shall not be used as a repair measure. All welds shall be accomplished in accordance with commerical practice, and shall be smooth, sound, and free from porosity, burned or reduced areas, fractures, and undercut. Welding scale shall be removed, and rough edges and projections shall be dressed smooth.

3.3.2 Fastening devices.- Fastening devices shall be standard commercial items, fabricated from steel, and shall have a zinc or cadmium plated finish. Threaded fasteners shall be installed with lockwashers or self-locking nuts to prevent loss of tightness. Fastening devices subject to removal or adjustment shall not be peened, swaged, staked, or otherwise deformed to prevent adjustment or removal. All threaded parts shall be in the inch system and shall comply with Handbook H28.

3.3.3 Sheet metal components.- All like bends of sheet metal components shall be of uniform radius, and unless otherwise specified on the drawings, radii shall be as small as practicable in relation to sheet metal thickness. All exposed sheet metal edges shall be free of sharp edges and burrs.

3.3.4 Riveting.- When applicable, holes for rivets shall be of a diameter to insure a snug fit with the rivet shank after setting. When practicable, rivet holes shall be drilled or punched at time of assembly. Burrs at rivet holes that may prevent proper seating of rivet heads shall be removed. Setting

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

of rivets shall be accomplished so that mating surfaces are drawn tight. The rivet heads shall be in full contact with mating surfaces, concentric with the rivet shank, and rivet heads shall be free from splits, burrs, and sharp edges.

3.3.5 Base and cabinet sides assembly.- The cabinet base shall be assembled to the cabinet sides so that the assembled cabinet is not supported by any sheet metal edges.

3.3.6 Cabinet drawers.- The cabinet drawers shall be equipped with stops wherever shown on applicable drawings. The drawer stops shall prevent drawer removal when opened in a normal manner, but shall permit drawers to be intentionally removed. All drawers of one size shall be interchangeable. The drawers shall operate smoothly without binding and shall not have more than 1/4 inch total side clearance between the drawers and drawer guides. The front face of drawers shall be flush with face of shelves within 1/16 inch. Fabrication of drawer ribs and slots shall be as shown on applicable drawings, or alternatively, the ribs and slots shall be the manufacturer's current method of fabrication, providing that equal compartmenting and rigidity capabilities as shown on the drawings are maintained.

3.3.7 Doors.-

3.3.7.1 Bin doors.- Bin doors shall be removable from the cabinets by sliding the open door to the right. Except for the bottom door of type II cabinets, each bin door on types I and II cabinets shall be equipped with two restraining chains specified in 3.2.8, located as shown on the applicable drawings. Restraining chains shall not be required for the bottom door of type II cabinets. The chains shall be of sufficient length to retain the open door in a horizontal plane. The chains shall be attached by bolting, welding, or riveting. The closed doors shall not extend more than 1/8 inch beyond the front edge of the shelf, and shall not recess more than 1/8 inch from the front edge of the shelf.

3.3.7.1.1 Bin door latches.- The latching assembly for bin doors shall be fabricated of not less than 1/8 inch thick steel. The fixed portion shall be attached by welding or riveting. The pivoting handle shall be secured to the door by riveting. The attached latch shall have a positive engagement.

3.3.7.2 Full height doors.- Full height double doors shall have the right-hand door equipped with a three point latching device, and the left hand door equipped with a two point latching device. The latching mechanism shall be controlled by handles of the pivoting type. The handles shall be diecast brass, bronze or zinc alloy and shall be nickel or chromium plated. The doors shall be recessed into the cabinet, with the front face of the doors flush with the front edge of the sides, top, and bottom. The door suspension shall permit removal of cabinet trays and drawers when the doors are opened 90 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

3.3.7.3 Hinges.- Hinges for bin doors and full height doors shall be fabricated from not less than 0.072 inch thick steel. Bin doors hinges shall be a separating type. Hinge pins shall be not less than 0.120 inch diameter steel wire or rod. Hinge leafs shall be attached to the cabinets and doors by spot welding, as shown on applicable drawings, or by means of rivets or spot welds where not otherwise indicated. Unless otherwise shown on the drawings, each hinge leaf shall be attached by not less than three spot welds or two rivets.

3.3.8 Locking bars and guides, staples and pins.- The locking bars and guides shall be fabricated of steel strips not less than 0.083 inch thick. The staples and pins shall be fabricated of flat or round steel wire. Chain specified in 3.2.8 shall be riveted to the pin and locking bar. The locking bars shall hold the drawers in a closed position so that the drawer opens not more than 1/8 inch. The guides shall be welded as shown on applicable drawings or may be attached by riveting.

3.3.9 Tops, composite wood.- The finished thickness of the composite wood top for types I and V cabinets shall be 1-3/4 inches ± 1/16 inch. The top shall consist of a core of glued-up wood blocks specified in 3.3.9.1, or particleboard specified in 3.2.4. The core option shall have a face and back veneer of hardboard specified in 3.2.3, or particleboard specified in 3.2.4. The face and back veneers shall be glued to the core using adhesive specified in 3.2.5.1, 3.2.5.2, or 3.2.5.3. The complete top shall be flat with no warpage greather than 1/8 inch, measured along the diagonals. Sides and end shall be smooth and all edges and corners eased to eliminate sharpness.

3.3.9.1 Wood block core.- The wood block core shall be constructed of wood specified in 3.2.2, dried to a moisture content of not more than 8 percent at the time of gluing, when tested as specified in 4.3.2.1. The wood blocks and strips shall be free of unsound knots, tight knots over 1/4 inch in diameter, decay, pitch pockets, splits, holes and wrap. The core shall consist of random length blocks not more than 12 inches nor less than 5 inches long and not more than 1-3/4 inches wide, surfaced on two sides for gluing. Full length strips shall be used on the outer edges. The wood blocks and strips shall be glued into a solid core using adhesive specified in 3.2.5.1, 3.2.5.2, or 3.2.5.3, with the blocks parallel to the width dimension of the top. Blocks shall be closely butted with no opening more than 1/16 inch. After gluing and curing of the glue, the core shall be machined to a smooth uniform thickness for application of the face and back.

3.3.10 Tops, hardboard and steel.- Type IV cabinets shall have a hinged top fabricated of steel, with the lifting portion overlaid with hardboard specified in 3.2.3. The hardboard shall be riveted to the top as shown on the applicable drawings. After setting, the rivet heads shall be flush with the hardboard top surface. Two chains specified in 3.2.8 shall be located, one near each end of the top. The chains shall be fixed to the underside of the top and to the cabinet sides to retain the open top at approximately 20 degrees beyond the vertical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

3.3.11 Trays - Trays for type III, class A cabinets shall have tray stops provided to prevent the trays from striking the back plate when closed, and to keep the front edges aligned within 1/16 inch of the closed cabinet doors. The trays shall move freely between the tray guides, with not more than 3/16 inch total side clearance between the trays and tray guides. Built-in stops shall be provided to prevent tray removal when opened in a normal manner, but shall permit trays to be intentionally removed.

3.3.11.1 Tray pins.- Unless otherwise specified (see 6.2), each tray shall be furnished with 30 tray pins conforming to requirements shown on the applicable drawings. The pins shall be installed in 11 front and 11 rear holes, and in 4 holes on each side of the tray. The pins shall be set hard against their shoulders, and secured by speed nuts.

3.4 Finish.-

3.4.1 Surface preparation.- Prior to painting, metal surfaces of the cabinets shall be cleaned and treated in accordance with any method or type of TT-C-490.

3.4.2 Priming and enameling.- Surfaces treated as specified in 3.4.1 shall be coated with primer specified in 3.2.6. Primed surfaces shall then be coated with enamel specified in 3.2.7. The enamel shall be air dried or baked in accordance with the paint manufacturer's directions. The enamel shall level out to produce a smooth, uniform surface without runs, wrinkles, grit, areas of no film and separation of color. Primer may be omitted from any surface prepared for painting in accordance with type I or II of TT-C-490, providing the dry enamel film thickness averages not less than 1.0 mil and no reading is less than 0.7 mil.

3.5 Assembly.- Unless otherwise specified (see 6.2), types II and VI cabinets shall be furnished knocked-down. All other types of cabinets shall be furnished setup. Tools required for assembly shall be limited to regularly available screwdrivers, wrenches and pliers.

3.5.1 Assembly instructions.- Each knocked-down cabinet shall be furnished with a copy of assembly instructions. The instructions shall describe in a clear, concise manner the procedure to follow in assembly. All component parts, when practicable, shall be legibly marked for identification and cross reference with the assembly instructions. The instructions shall be sealed in a water-proof envelope and secured to a cabinet component.

3.6 Identification marking.- Each cabinet shall be marked in accordance with the unit marking requirements of MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

3.7 Structural rigidity.- The cabinets shall be capable of withstanding the vibration test in 4.4.2, while the cabinets are subjected to proof loads not less than indicated in table I, and with the cabinets secured closed by the means provided. During conduct of the test, the doors shall not open, and loaded drawers and trays shall remain in the fully closed position. After testing, examination shall reveal no permanent deformation, sags, cracks in or around welds, bent bolts, pulled rivets, or distortion of any component. All drawers, trays, doors, hinged components, and sliding trays shall operate normally without evidence of binding or misalignment.

TABLE I.- Minimum capacity loads of individual drawers, bins, trays, shelves

Drawer Size	Cabinet types - load in lb.						
	I	II	IIIA	IIIB	IV	V	VI
a	25						
b, c	50						
d	100						
e			25	25			
f					20		
g, h					60		
j						100	
k						75	
Small bin	100			100			
Large bin				300			
Shelf		100			30		100
Tray			50				
Total proof-load	1000	300	1250	1350	750	850	300

3.8 Workmanship.- The end item shall be clean and free of corrosion, burrs, snags, and rough or sharp edges. All functioning components shall operate smoothly without binding. There shall be no loose or misplaced components, and the assembled cabinets shall be in proper alignment. Knocked-down cabinets shall be readily assembled without the need to modify or rework any component. Painted and plated surfaces shall be uniformly coated, dry, free from runs, sags, teardrops, foreign matter, chips, scratches, blisters, flaking and peeling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects classified in table II, dimensions specified, and tested in accordance with 4.4.1 and 4.4.2, as applicable.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise specified hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 Process inspection.-

4.3.2.1 Testing for moisture content of wood.- The moisture content of wood requirement in 3.3.9.1 shall be determined in accordance with ASTM-D 2016-62 at time of assembly. When testing is performed by the electric moisture meter method, three determinations shall be made on each sample unit. The average of the three determinations shall be the moisture content of the sample unit. The lot shall be all machined components prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one component. The inspection level shall be S-1. The acceptable quality level (AQL) shall be 4.0, expressed in terms of defects per hundred units.

4.3.2.2 Process examination.- Examination shall be made during the manufacturing process to determine compliance with the surface preparation and priming requirements in 3.4.1 and 3.4.2. Whenever nonconformance is noted, correction shall be made to affected items and process.

4.3.3 End item inspection.- The lot shall be all cabinets of the same type and class offered for inspection at one time. The sample unit shall be one completely assembled cabinet or, when knocked-down cabinets are required, all of the finished components required to completely assemble one knocked-down cabinet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

4.3.3.1 Visual examination.- The end item shall be examined for applicable defects classified in table II. The inspection level shall be II. The AQL shall be 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish, metal components	Color not as specified.		X
	Area of no finish.		X
	Discoloration or foreign matter imbedded.		X
	Not adherent, flaky or blistered.		X
	Indication of rust under finish.	X	
	Not smooth, i.e., sags, runs, drips, lap, wrinkles or orange peel.		X
Construction and workmanship	Assembly out of square.	X	
	Any part broken, split, fractured, cracked or malformed.	X	
	Any component missing (except fasteners).	X	
	One bolt, nut, washer or rivet missing.		X
	More than one bolt, nut, washer or rivet missing.	X	
	Any sharp or protruding edge.	X	
	Any fastening device not secured.		X
	Bolt or nut peened or staked.		X
	Cabinets of the same type and class not identical throughout.	X	
Tops	Not specified construction.	X	
	Not attached as specified.		X
	Rivets or bolt heads not flush with or below surface of hardboard.		X
	Type IV top does not open beyond vertical.	X	
Composite wood tops	Open glue joint in exposed core, or between face or back and core.	X	
	Warp exceeding 1/8 inch.		X
	Hole, gouge, split or damage to top surface.	X	
	Sides and ends not smooth.		X
	Edges and corners not rounded.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (Cont'd)

Examine	Defect	Classification Major	Minor
Construction and workmanship (Cont'd)			
Drawers and trays	Cannot be removed.	X	
	Not interchangeable (as applicable).	X	
	Retaining stops missing (when required).	X	
	Tray pins not installed (when applicable).	X	
Doors, bin	Not removable.	X	
	Chain missing.	X	
	Chains do not hold door open at horizontal plane.		X
Door, full height	Will not close.	X	
	Prevents removal of drawer or tray.	X	
	Not contained within sides, top and bottom when closed.	X	
Locking bars	Do not hold drawers closed within 1/8 inch.		X
Welds	Not dressed smooth.		X
	Spot weld missing.	X	
	Not sound (fractured, burned through or reduced).	X	
	Spot welds not located where specified.		X
Assembly instruction (when required)	Missing.		X
	Incomplete, incorrect or illegible.		X
Identification Marking	Illegible, incorrect, incomplete, or improperly applied.		X

4.3.3.2 Dimensional examination.- The end item shall be examined for defects in dimensions, including paint thickness (when primer is omitted). Any dimension not within specified limits shall be classified a defect. The inspection level shall be S-2. The AQL shall be 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

4.3.3.3 End item testing.- When knocked-down cabinets are required, the cabinets shall be assembled and examined as specified in 4.4.1. The inspection level shall be S-2 and the AQL shall be 2.5, expressed in terms of defects per hundred units. In addition, when a preproduction sample is not required, the initial production unit shall be tested in accordance with 4.4.2 with no evidence of failure.

4.3.4 Examination of preparation for delivery.- Examination shall be made for preservation, packaging, packing and marking in accordance with PPP-P-1010.

4.4 Tests.-

4.4.1 Assembly of knocked-down cabinets.- Knocked-down cabinets shall be assembled in accordance with assembly instructions (see 3.5.1) to determine compliance with applicable requirements in 3.5 and 3.8. After assembly, the cabinets shall be examined for applicable defects listed in table II.

4.4.2 Vibration.- The applicable assembled cabinet, loaded as specified in 3.7 and table I, shall be fastened to a vibration machine at the base mounting holes, and at the top and at the mounting bracket when applicable, and subjected to simple harmonic motions having an amplitude of 1/16 inch (1/8 inch total excursion) at a frequency of 600 cycles per minute for a total of 36,000 cycles in the direction of the vertical axis. The cabinets shall then be examined for compliance with 3.7.

* 5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing.- Preservation and packaging shall be in accordance with level A or C requirements, and packing shall be in accordance with level A, B, or C requirements of PPP-P-1010, as specified (see 6.2).

5.2 Marking.- In addition to any special marking required by the contract or order, interior packages and exterior shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use.- This specification covers cabinets to be used in maintenance shops and shop trucks for storage of spare parts and tools.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type and class required (see 1.2).
(c) First article.- When a preproduction sample is required (see 3.1).
(d) When types II and VI shall be furnished setup (see 3.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

(e) When chains shall be riveted or welded to bin doors (see 3.3.7.1).
(f) When more or less than 30 pins are required for each tray (see 3.3.1).
(g) Selection of applicable levels of preservation and packaging and packing (see 5.1).

* 6.3 Asterisks.- The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - MC
Air Force - 84

Review activities:

Army - WC
Navy - MC
Air Force - 84, 85

User activities:


Army - CE, AV, ME

Preparing activity:

Army - GL

Project No. 7125-0050


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

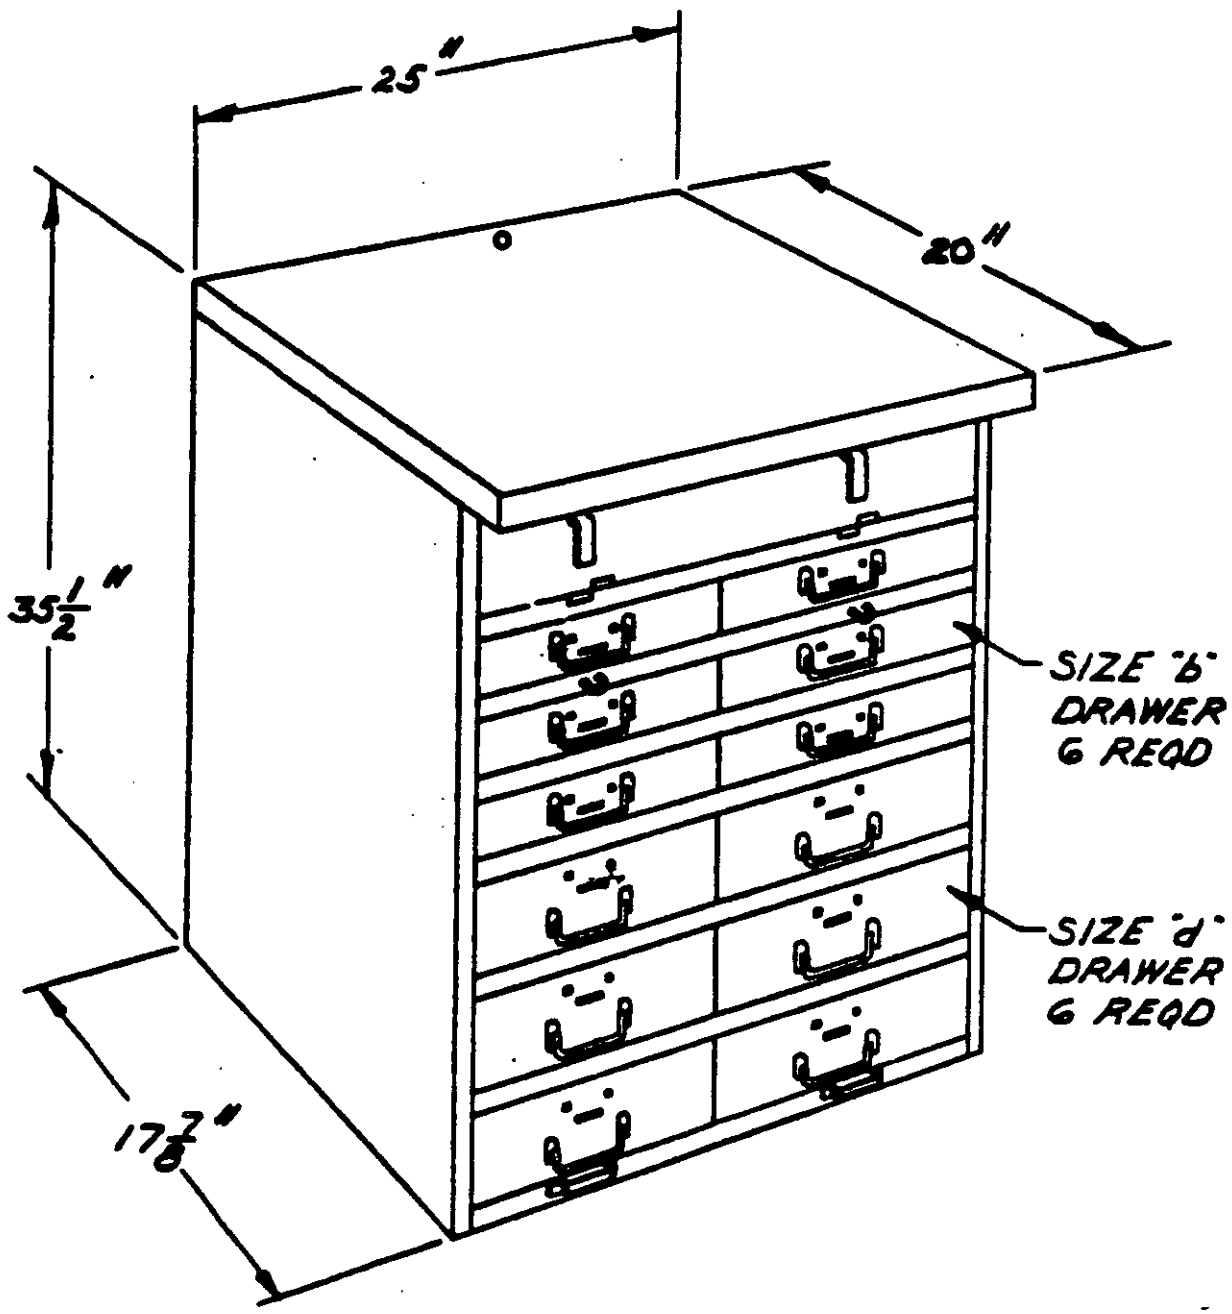

NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 1. TYPE-I, CLASS-A


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

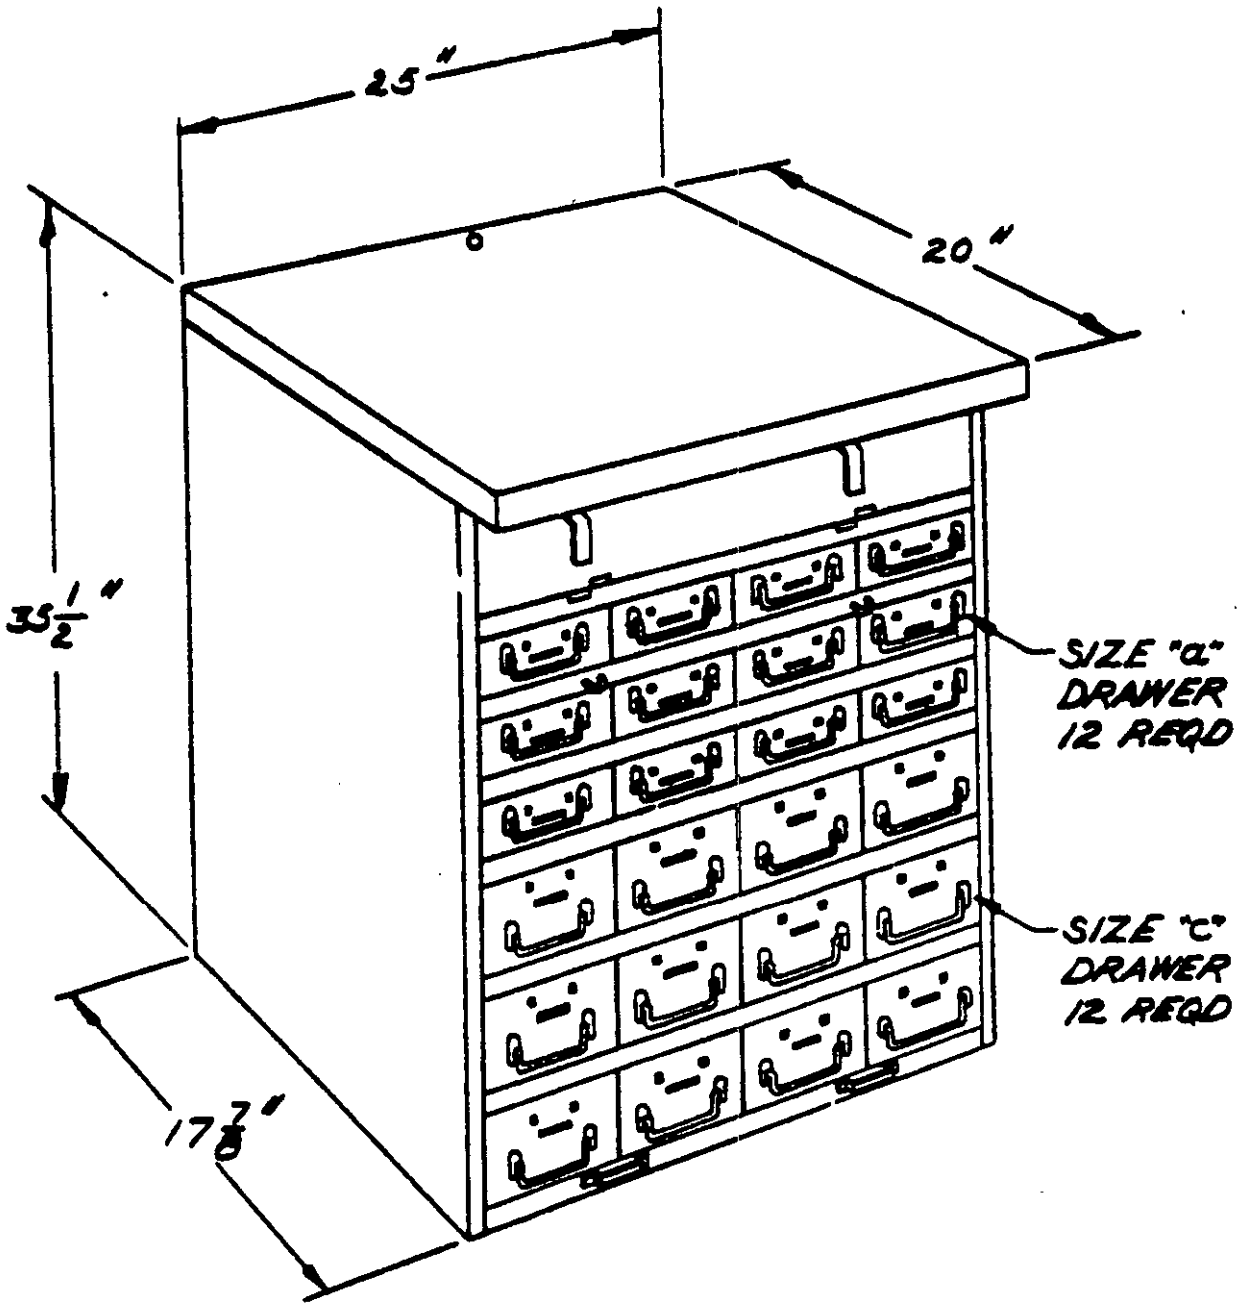

NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 2. TYPE-I, CLASS-B


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

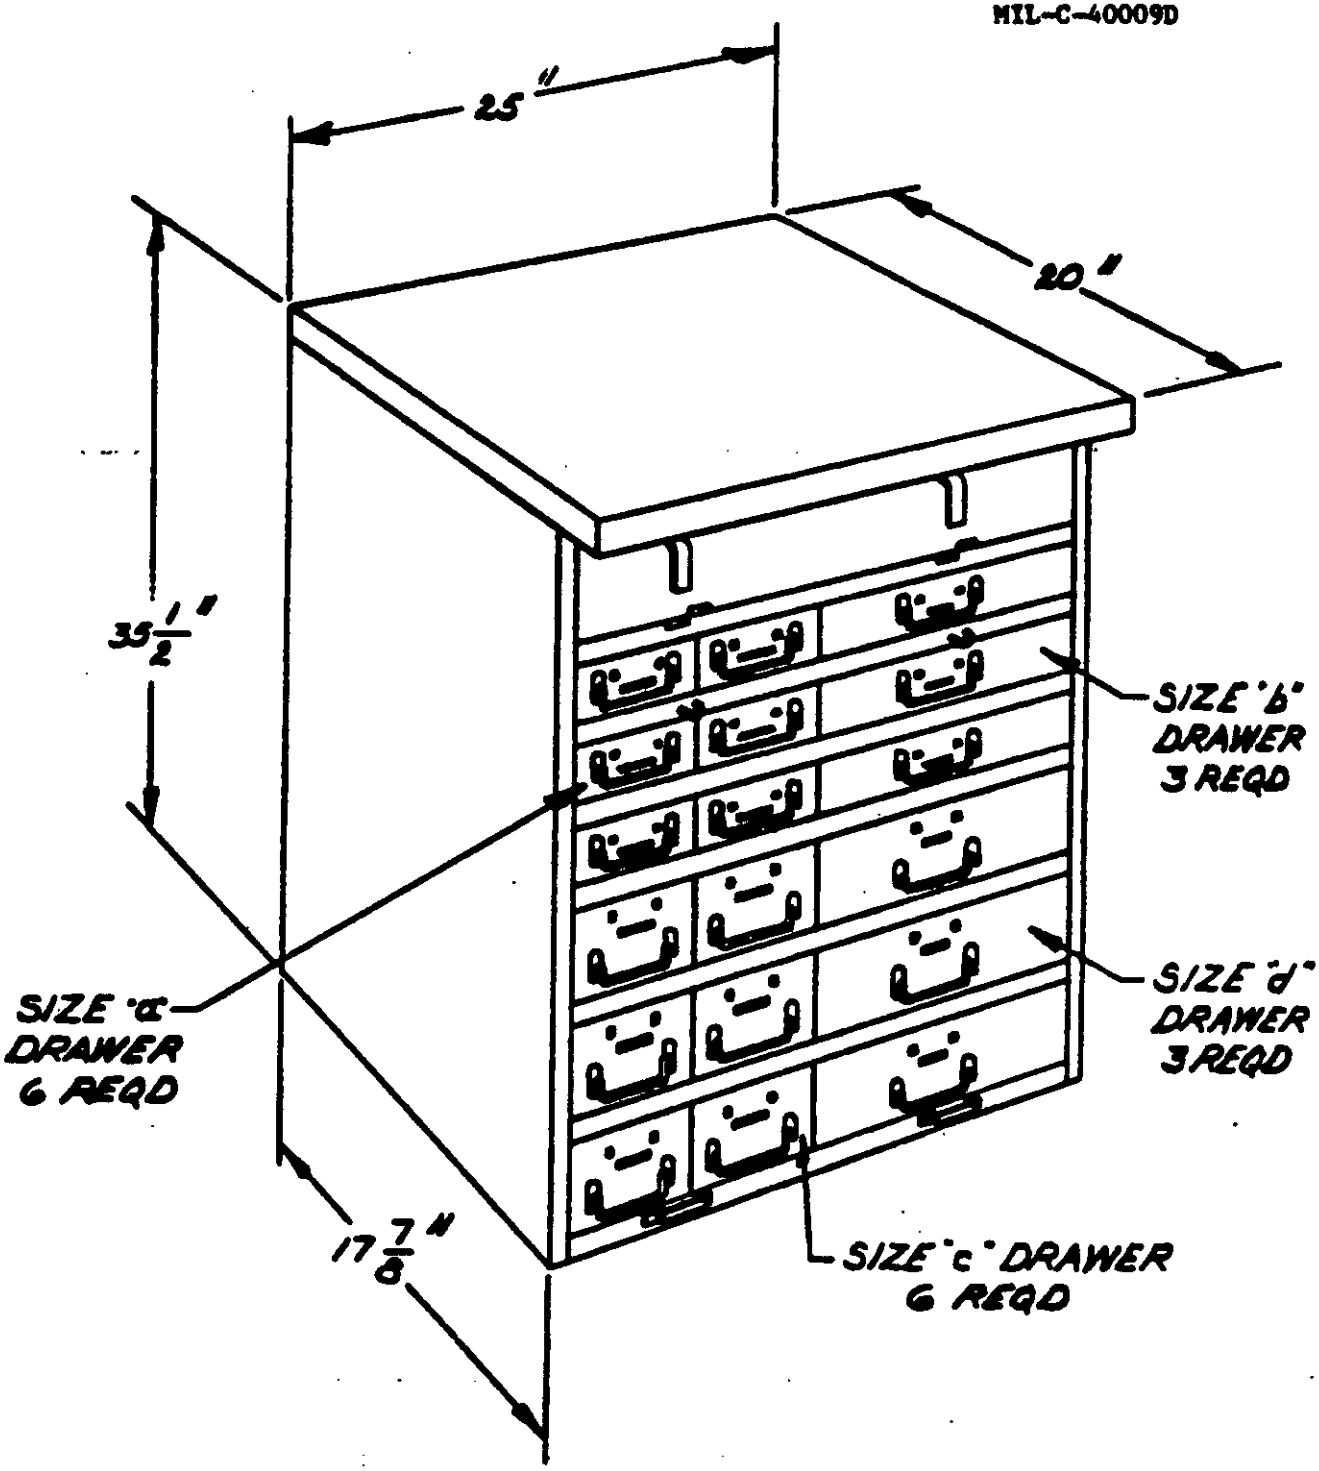

NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 3. TYPE-I, CLASS-C


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

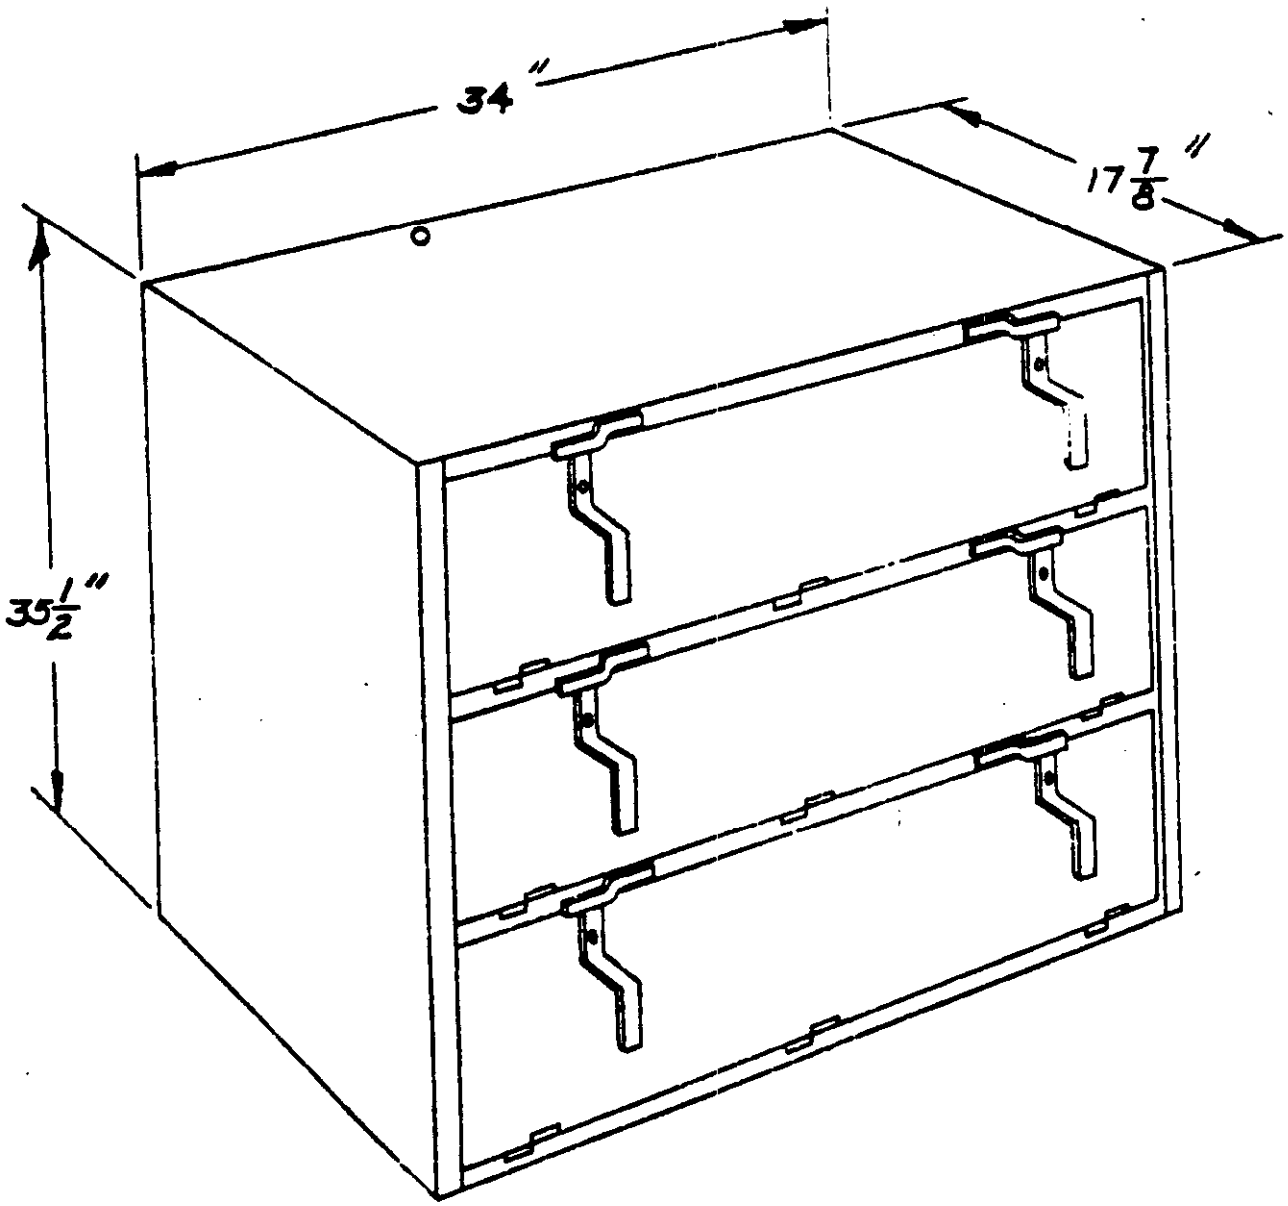

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 4. TYPE II


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

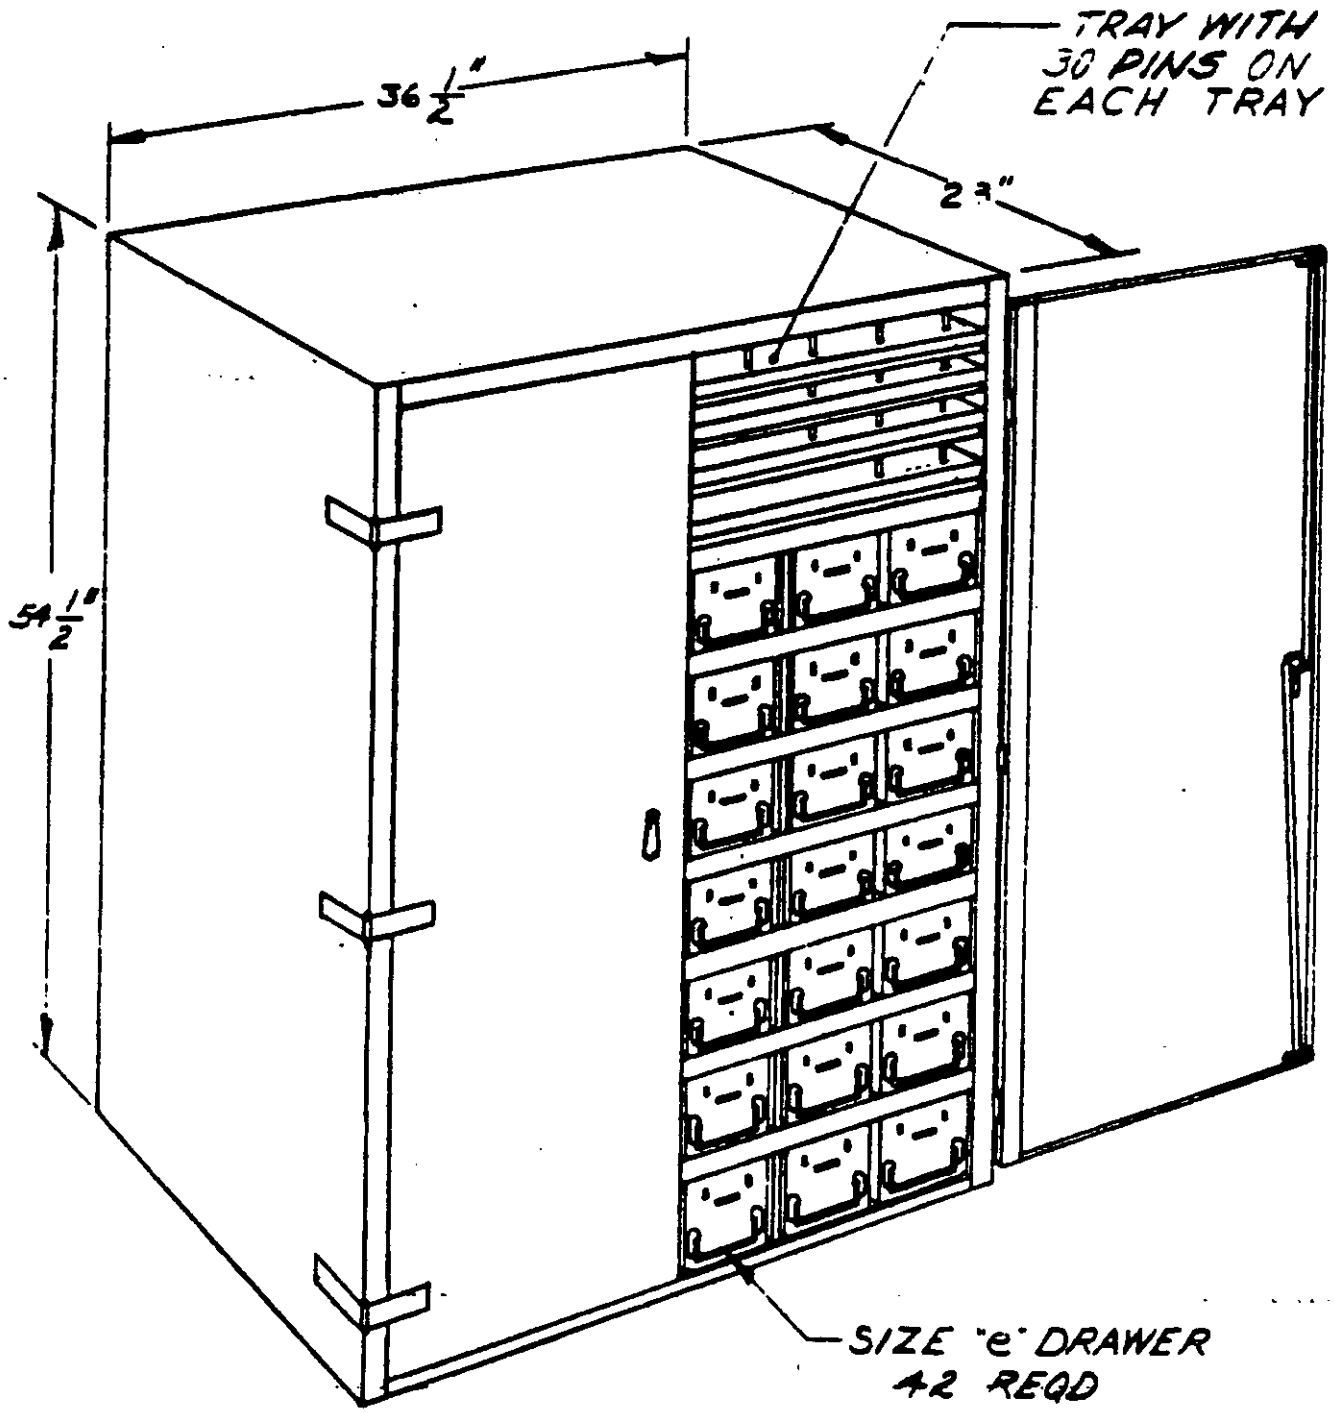

NOTE
ALL DIMENSIONS ARE REFERENCE.

FIGURE 5. TYPE II, CLASS A


Source: https://assist.dla.mil/ -- Downloaded: 2020-10-21T19:01Z
Check the source to verify that this is the current version before use.

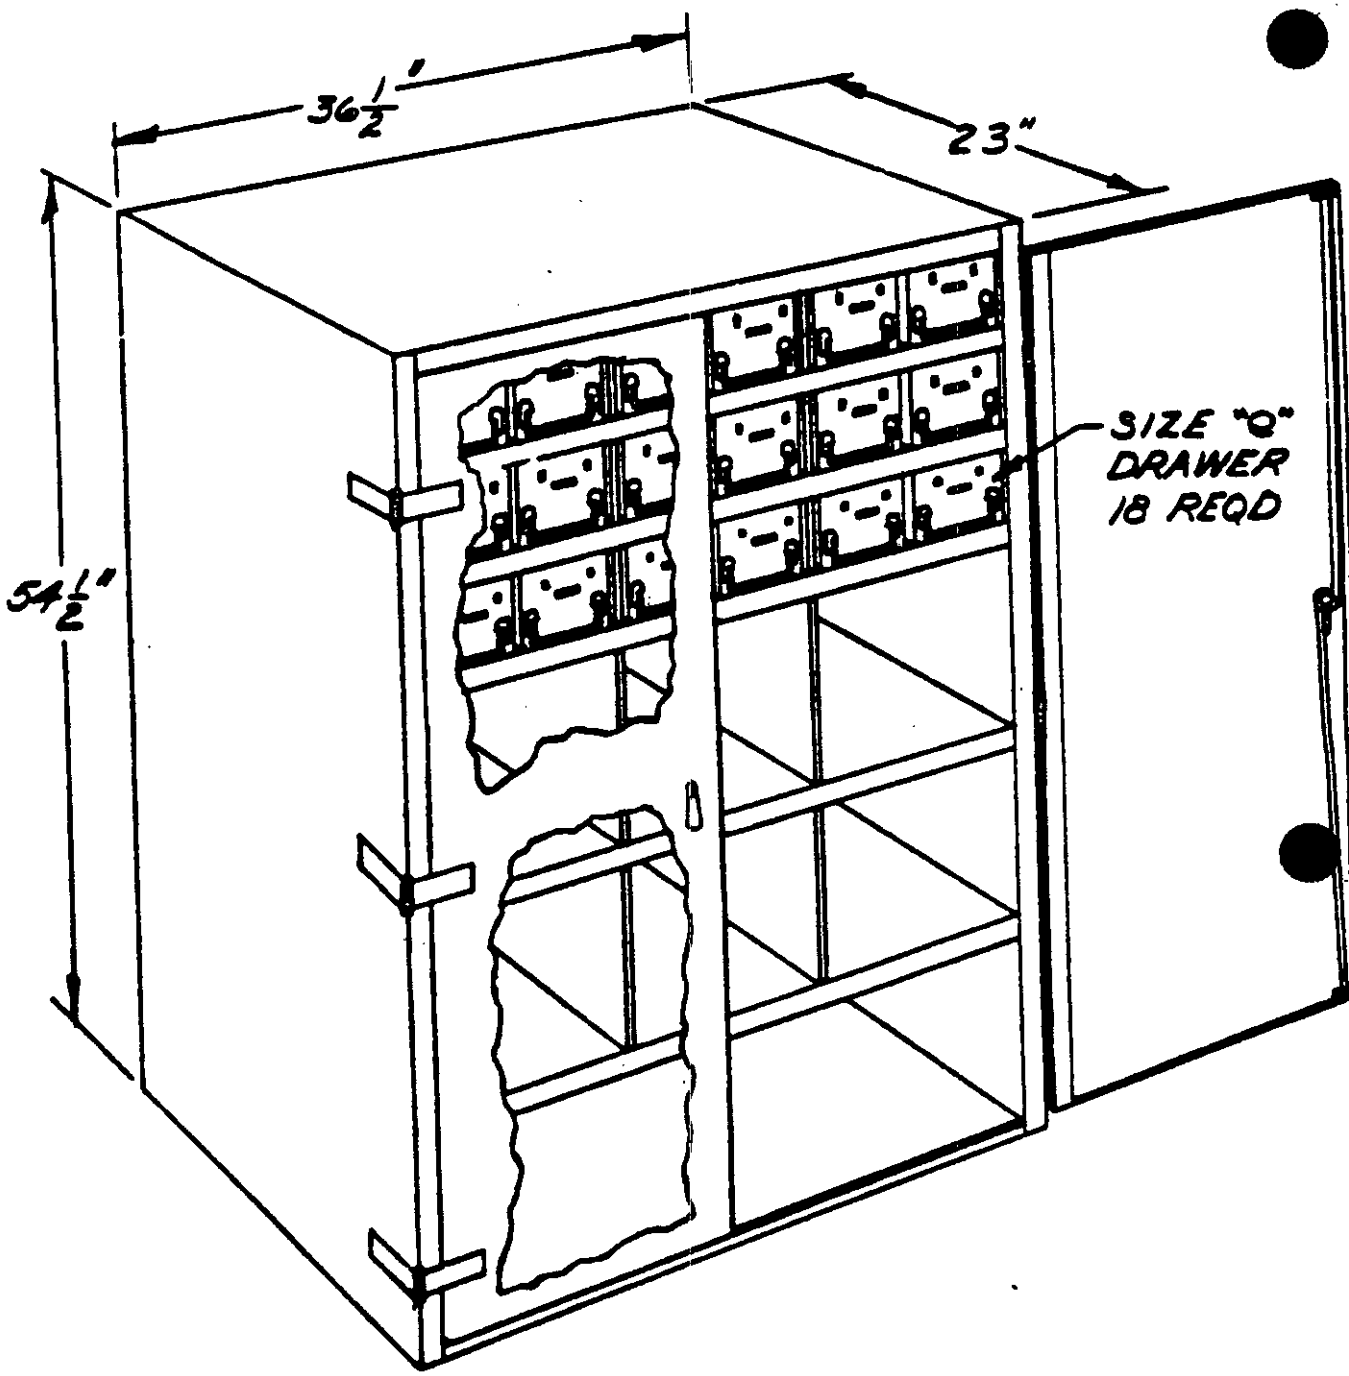

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 6. TYPE III, CLASS B


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

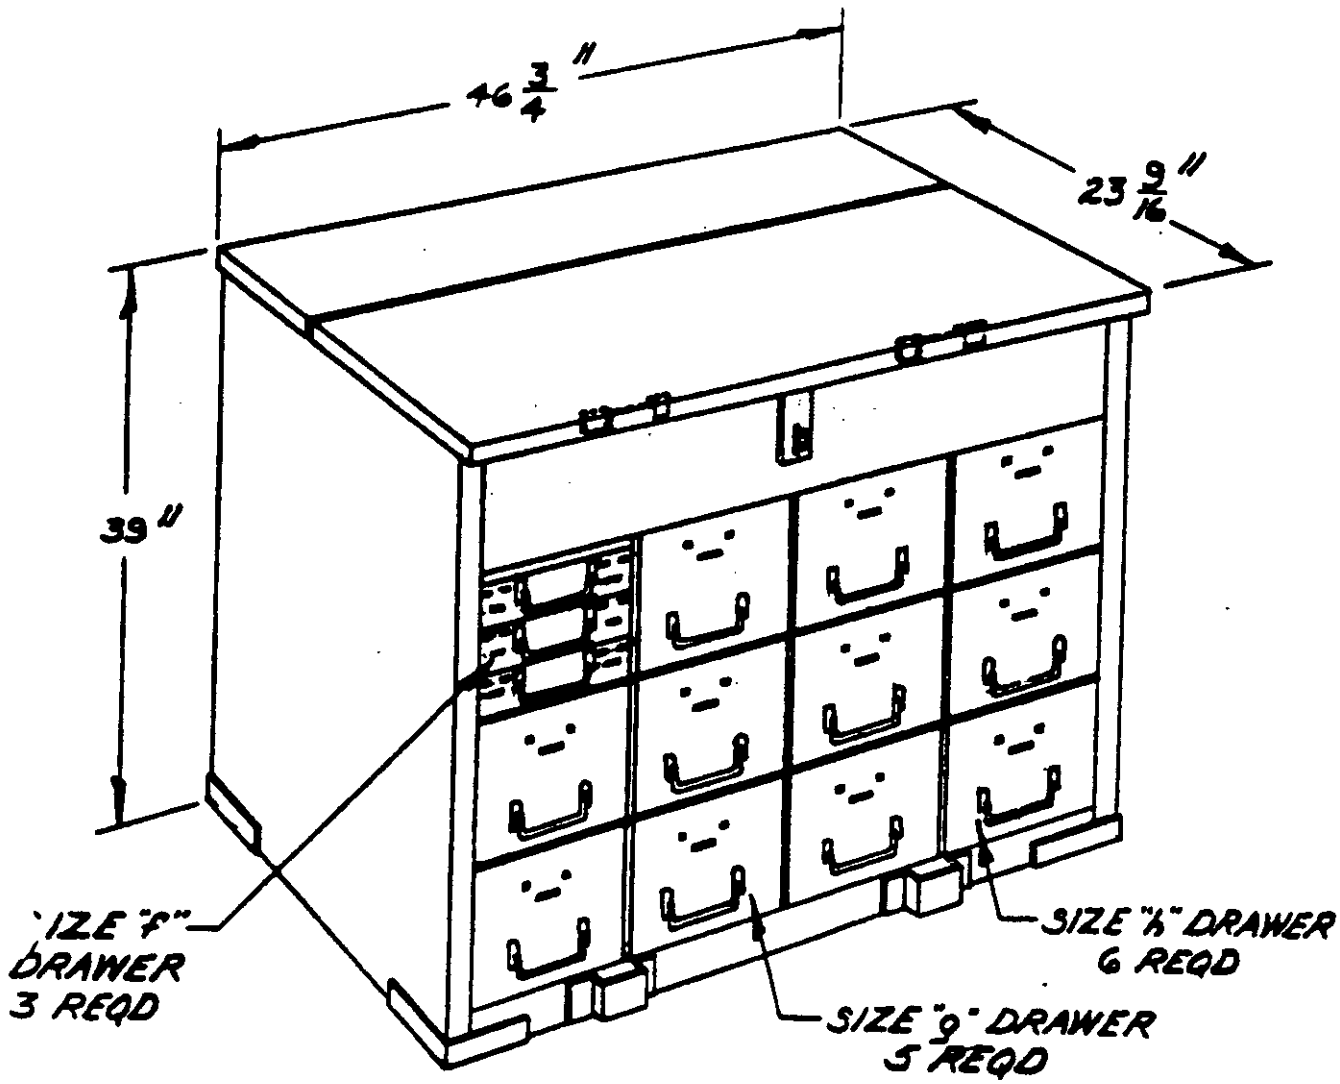

NOTES:
1. LOCKING BARS NOT SHOWN.
2. ALL DIMENSIONS ARE REFERENCE.

FIGURE 7. TYPE III


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

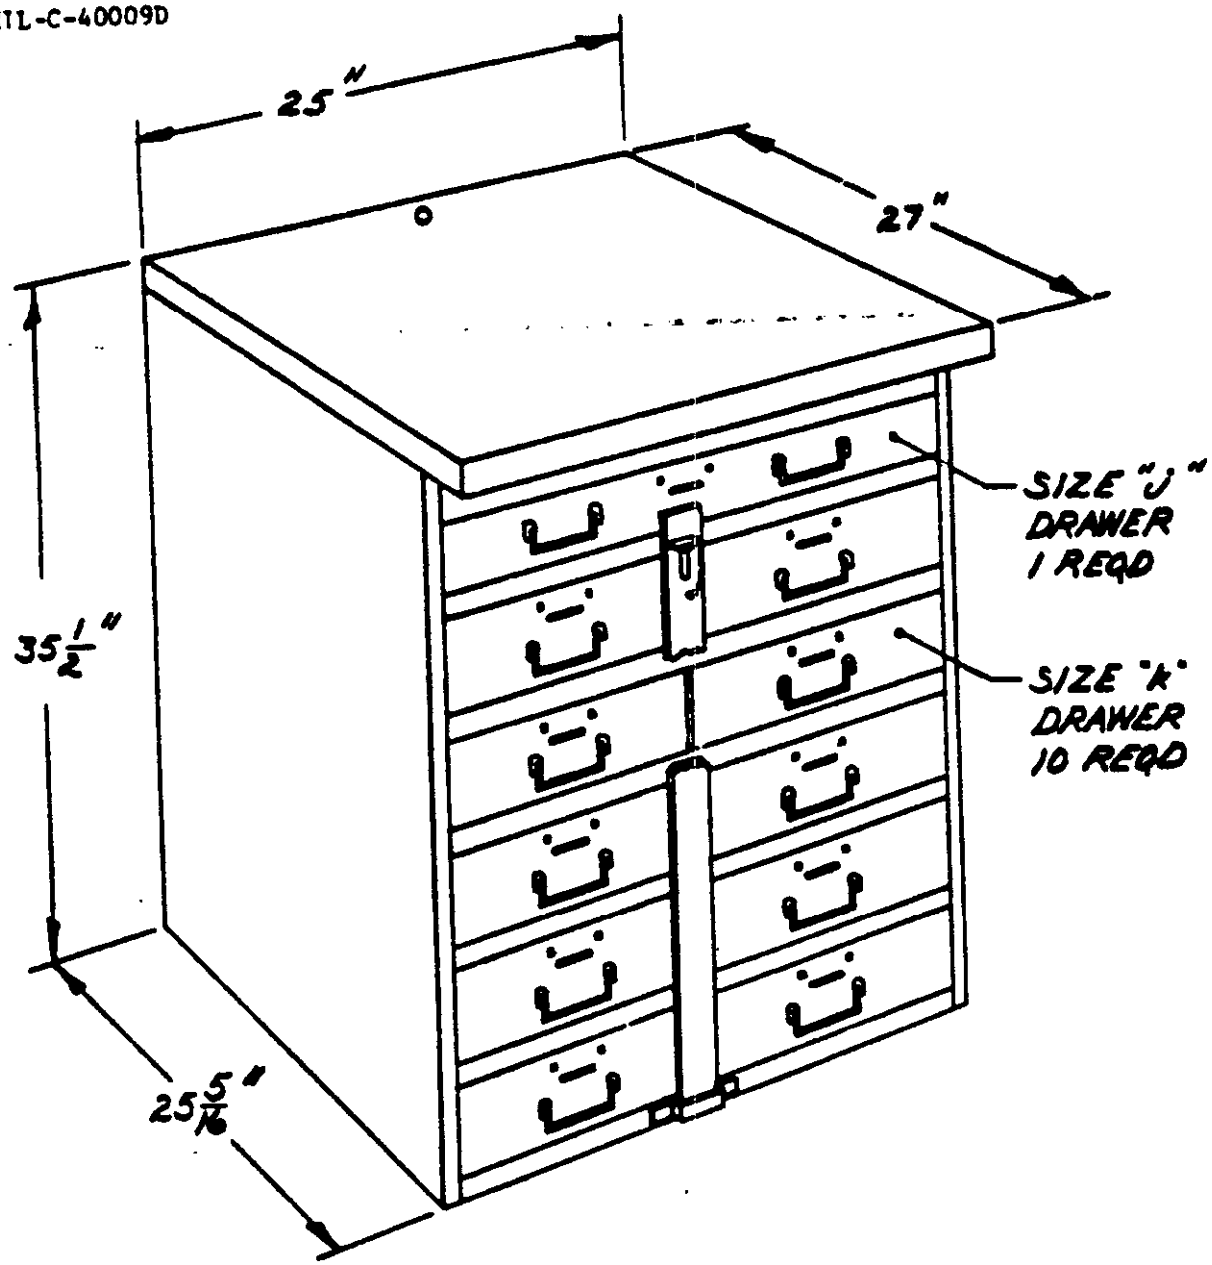

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 8. TYPE V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

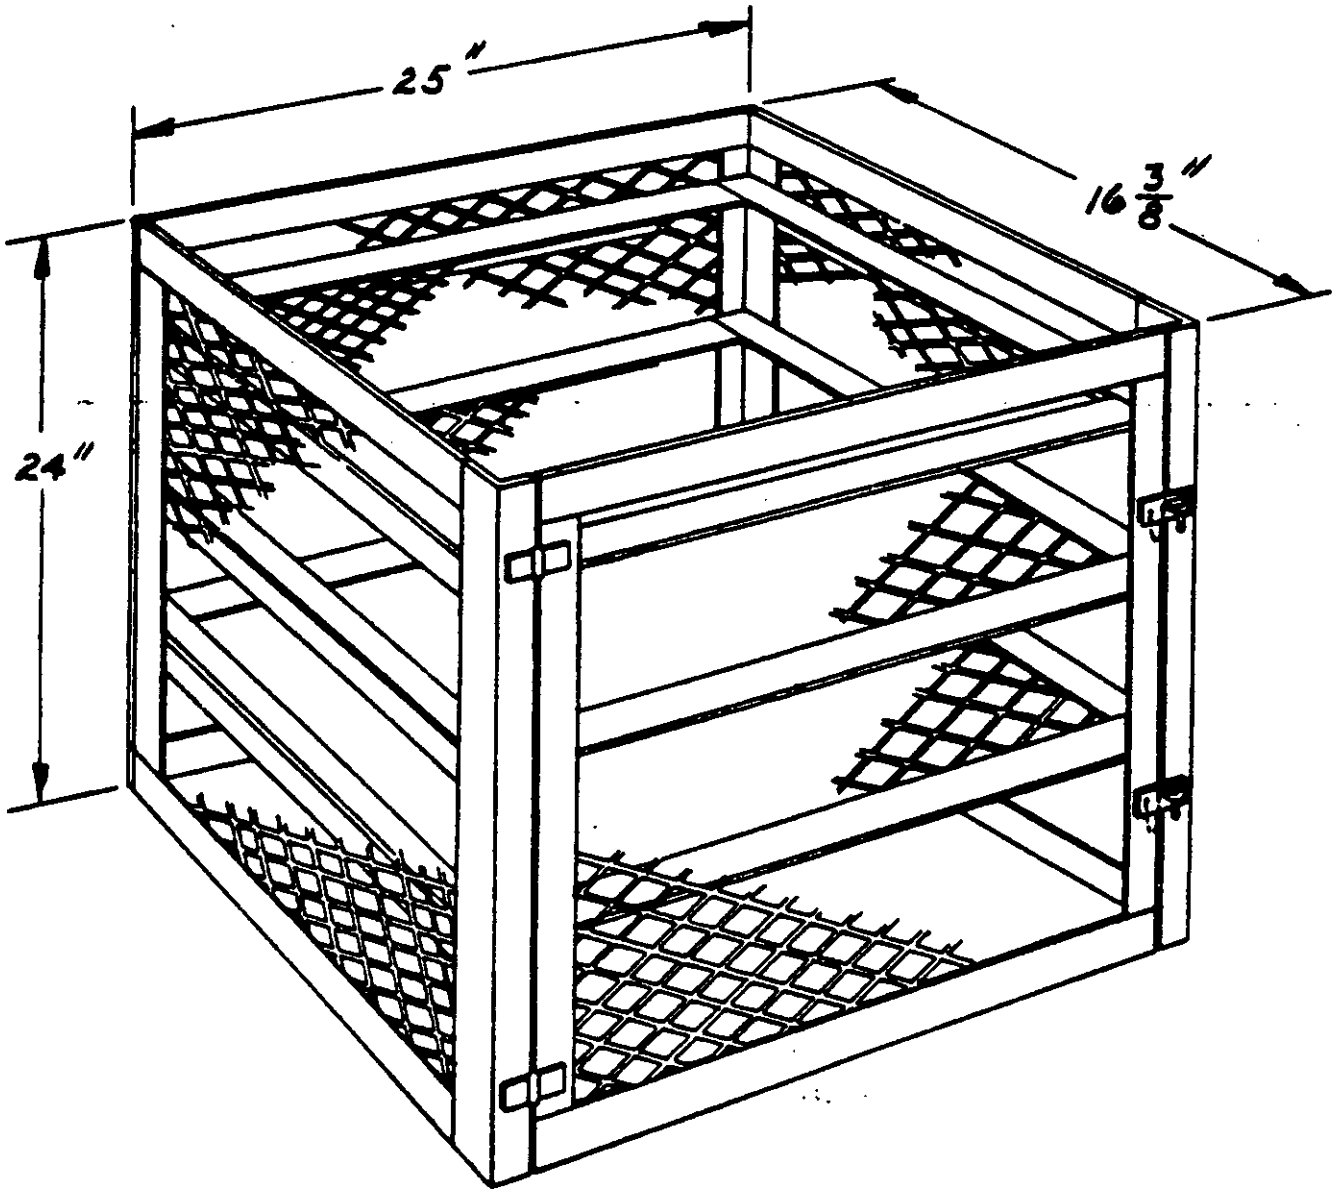

NOTE:
ALL DIMENSIONS ARE REFERENCE.

FIGURE 9. TYPE VI

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.