MIL-F-40055A
30 March 1967
SUPERSEDING
MIL-F-40055
26 March 1959

MILITARY SPECIFICATION

FLAG SET M-113

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers one type of signal flag set designated as the M-113 Flag Set. The flag set shall consist of two MC-44 flags (each flag to have an MC-43 flagstaff) and one CS-16 case.

1.2 Classification.- The flag set shall consist of the following components:

Component A - Flag(MC-44)with Flagstaff(MC-43)
Component B - Case(CS-16)

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285 - Thread, Polyester
FF-R-556 - Rivets, Solid, Small, Rivets, Split, Small, Rivets, Tubular, Small and Caps, Rivets, General Purposes
QQ-B-613 - Brass (Copper Zinc Alloy) Leaded and Nonleaded; Plate, Rolled Bar, Sheet and Strip
TT-V-119 - Varnish, Spar, Phenolic Resin
CCC-C-419 - Cloth, Cotton, Duck, Unbleached, Plied Yarns (Army and Numbered)
CCC-C-439 - Cloth, Bunting, Cotton, Mercerized
CCC-D-950 - Dyeing and Aftertreating Processes for Cotton Cloths
CCC-T-191 - Textile, Test Methods
DDD-T-86 - Tape, Cotton, Bleached, Dyed or Grey, General Use

FSC 8345

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner

MILITARY

MIL-F-495 - Finish, Chemical, Black, for Copper Alloys
MIL-C-496 - Clips, End, Strap
MIL-W-530 - Webbing, Textile, Cotton, General Purpose, Natural or in Color
MIL-B-543 - Buckles, Tongueless and Web Strap
MIL-W-6110 - Wood, Determination of Moisture Content
MIL-S-13518 - Sealer, Surface, Wood Preservative
MIL-G-16491 - Grommet, Metallic

STANDARDS

FEDERAL

Fed. Std. No. 751 - Stitches, Seams and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

THE INSTITUTE OF HERALDRY

5-1-336 - Flag MC-44 and Flagstaff MC-43
5-1-332 - Case CS-16 Assembly and Details

(Figures 1 and 2 are miniature reproductions of the referenced drawings and are attached for information only.)
(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following publication forms a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America, 9th Edition

(Applications for copies of the color card shall be addressed to Color Association of the United States, Incorporated, 200 Madison Avenue, New York, New York 10016.)

3. REQUIREMENTS

3.1 Guide sample.- Unless otherwise specified (see 6.2), a guide sample of the finished item will be furnished for a guide to construction only. Variations from this specification may appear in the sample, in which case the specification shall govern.

3.2 Standard sample.- Unless otherwise specified, (see 6.2), standard samples of the cotton bunting, cotton tapes, cotton duck, webbing and thread shall be furnished and shall be used for matching color and colorfastness only.

3.3 Preproduction sample.- Unless otherwise specified (see 6.2), before production is commenced a sample of the finished flag set or component as applicable, shall be submitted or made available to the contracting officer or his authorized representative for inspection and tests as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with the provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.4 Materials.- Materials shall conform to the referenced specifications and the requirements specified herein.

3.4.1 Cloth, cotton bunting.- The cotton bunting shall conform to CCC-C-439.

3.4.1.1 Color and treatment.- The cotton bunting for the upper portion of the flag shall be Old Glory Red to match Cable No. 70180 and the cotton bunting for the lower portion of the flag shall be bleached white conforming to Cable No. 70001. The cable numbers are from the Standard Color Card of America 9th Edition (see 2.2). The cotton bunting shall be treated in accordance with class B of CCC-D-950 using inhibitor (a) except the requirement for hydrostatic resistance shall not apply. When tested as specified in 4.4.1, the finished fabric shall show fastness

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

to light and bleaching equal to or better than the standard sample. When no standard sample is available the finished fabric shall show good fastness to light and bleaching.

3.4.2 Tapes, cotton.-

3.4.2.1 Fastening tapes.- The tapes used for fastening the flag shall be 1/2 inch wide and shall conform to type III, class 3 of DDD-T-86. The length of the tapes shall be as specified on drawing 5-1-336.

3.4.2.1.1 Color and treatment.- The fastening tape shall be dyed Old Glory red to match Cable No. 70180 The dyed tape shall be treated in accordance with class B of CCC-D-950 using inhibitor (a) except the requirement for hydrostatic resistance shall not apply. When tested as specified in 4.4.1, the finished tape shall show fastness to light and bleaching equal to or better than the standard sample. When no standard is available, the tapes shall show good fastness to light and bleaching.

3.4.2.2 Binding and tie tapes.- The binding tapes for the case shall be 3/4 inch wide and the tie tapes used with the case shall be 1/2 inch wide. Both tapes shall conform to DDD-T-86 and the lengths of the tapes shall be as specified on drawing 5-1-332.

3.4.2.2.1 Color and treatment.- The binding tape and the tie tape shall be dyed to match shade Olive Drab #7 (see 6.3) and shall be water-repellent and mildew-resistant treated in accordance with MIL-W-530. When tested as specified in 4.4.1 the finished tape shall show fastness to light and bleaching equal to or better than the standard sample. When no standard is available the tapes shall show good fastness to light and bleaching. The exposed ends of the tie tapes shall be dipped in paraffin having a melting point of 140 degrees F for a distance of 1/2 inch from the ends.

3.4.3 Cloth, cotton duck.- Before finishing, the cotton duck used for the case shall conform to type III of CCC-C-419, 12.29 ounces per square yard.

3.4.3.1 Color and treatment.- The cotton duck shall be dyed to match shade Olive Drab #7 and shall be treated in accordance with class B of CCC-D-950 using inhibitor (a) except the requirement for hydrostatic resistance shall not apply. When tested as specified in 4.4.1, the finished duck shall show fastness to light and bleaching equal to or better than the standard sample. If no standard is available the finished duck shall show good fastness to light and bleaching.

Source: https://assist.dla.mil -- Downloaded: 20260-21T19:06Z
Check the source to verify that this is the current version before use.

3.4.4 Webbing, cotton.- The webbing for the case shall conform to MIL-W-530 in the following sizes, types, and classes:

5/8 inch - Type II, class 4
1 inch - Type III, class 4

3.4.4.1 Color and treatment.- The webbing shall be dyed to match shade Olive Drab #7 and shall be water-repellent and mildew-resistant treated conforming to class 4 of MIL-W-530.

3.4.5 Thread, polyester.- The thread for sewing shall conform to V-T-285. The thread for sewing the flag shall conform to type I, size B, 2 or 3 ply and the thread for sewing the case shall conform to type II, size B, 2 or 3 ply.

3.4.5.1 Color and treatment.- The thread used for sewing the flag and bartacking the fastening tapes shall be undyed. The thread used for sewing the case shall be dyed to match Olive Drab shade S-1 (Cable No. 66022). When tested as specified in 4.4.1, the thread shall show fastness to light and bleaching equal to or better than the standard sample. When no standard is available, the thread shall show good fastness to light and bleaching.

3.4.5.2 Thread lubricating compound.- The thread lubricating compound shall be a light, sulfur free, white mineral compound with a specific gravity of 0.830 to 0.860.

3.4.6 Grommets.- The metal grommets shall conform to type I, class 3 of MIL-G-16491.

3.4.7 Buckle.- Buckles shall conform to type II, class 1, size 5/8 inch and size 1 inch of MIL-B-543 and shall have a black chemical finish in accordance with MIL-F-495.

3.4.8 Rivets.- Rivets shall conform to type XI, class 1, grade F, 9/16 inch in diameter by 5/16 inch long with a type I cap of FF-R-556 and shall have a black chemical finish in accordance with MIL-F-495.

3.4.9 End clips.- End clips shall conform to type I of MIL-C-496 in design and construction. The clips shall be fabricated from soft brass sheet having a nominal thickness of .0253 inch. The brass sheet shall conform to the requirements of composition 1 of QQ-B-613. The finished clip shall be given a black chemical finish in accordance with MIL-F-495.

Source: https://assist.dla.mil -- Downloaded: 20260-21T19:06Z
Check the source to verify that this is the current version before use.

3.4.10 Wood.- The wood for the flagstaff shall be selected straight-grained wood free from all defects other than medium surface checks, small knots and medium stains. The wood shall have a moisture content of 8 to 12 per cent when tested in accordance with MIL-W-6110. Any of the following species of wood are acceptable:

Ash	Hickory
Beech	Maple
Birch	Walnut

3.5 Construction.- The flag set shall be constructed in accordance with the details and dimensions of drawings 5-1-336 and 5-1-332, as applicable, and the requirements specified herein.

3.5.1 Stitching.- All stitching shall be in accordance with Fed. Std. No. 751 using thread specified in 3.4.5. All stitching shall be accomplished with stitch type 301 with 10 to 12 stitches per inch for the flag and 8 tc 10 stitches per inch for the case. Thread breaks shall be back stitched not less than 1 inch at each break. Except where ends are turned under the hem or held down by other stitching, all stitching ends shall be backstitched 1 inch to prevent raveling. Thread tension shall be maintained so that there shall be no loose stitching and so the lock shall be imbedded in the center of the materials sewed. There shall be no loose or untrimmed threads on the finished flag or case.

3.5.1.1 Lubrication of thread.- If it is found that in the production sewing of the case, added lubrication of the thread is necessary to reduce thread breakage, the use of the lubricating compound specified in 3.4.5.2 will be permitted.

3.5.2 Bartacking.- The bartacking for the tie tape shall be not less than 5/8 inch in length with a 1/8 inch bight and shall contain not less than 28 stitches on the superimposed tape. Bartacking shall be free of thread breaks and loose stitching.

3.5.3 Setting of grommets.- Grommets shall be securely clinched upon the fabric without cutting the material. If a hole is punched before setting the grommets, the hole shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole.

3.6. Details of components.-

3.6.1 Component A (Flag MC-44).- Component A shall consist of the MC-44 flag and the MC-43 flagstaff. The flag shall be fabricated from bunting specified in 3.4.1 and shall conform to the details and dimensions

Source: https://assist.dla.mil -- Downloaded: 20261O-21T19:06Z
Check the source to verify that this is the current version before use.

shown on drawing 5-1-336. The flagstaff shall be fabricated from wood specified in 3.4.10 and shall conform to the details and dimensions shown on drawing 5-1-336.

3.6.1.1 Finish.- The flagstaff shall be sanded to a smooth surface and shall be given one dip or brush coat of clear wood-preservative sealer in accordance with type I or II of MIL-S-13518 and one coat of phenolic spar varnish in accordance with TT-V-119.

3.6.2 Component B (Case, CS-16).- Component B (CS-16 case) shall be fabricated from duck specified in 3.4.3 and shall conform to the details and dimensions shown on drawing 5-1-332.

3.7 Markings.-

3.7.1 Flag and case markings.- The letters and applicable numbers shall be printed or stencilled with black ink in the size characters as shown on drawings 5-1-332 and 5-1-336 as applicable and shall show fastness to laundering when tested as specified in table I.

3.7.2 Flagstaff markings.- The letters and applicable numbers shall be printed or stencilled with black ink or paint in the size characters as shown on drawing 5-1-336 previous to the application of finish coat of varnish.

3.8 Workmanship.- The finished flags, flagstaffs, and cases shall conform to the quality and grade of product established by this specification. Occurrence of defects shall be limited in accordance with the acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.2 Preproduction sample inspection.- Inspection and testing of the preproduction sample shall be made on a completely finished item for all provisions of this specification applicable to the end product examination

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

and tests.

4.3 Inspection for acceptance.- Inspection for acceptance shall be in accordance with MIL-STD-105, except where otherwise indicated.

4.3.1 Inspection of components.-

4.3.1.1 Testing of components.- In addition to the quality assurance provisions of the subsidiary specifications and standards, inspection shall be performed on components and materials listed in table I for the characteristic shown therein. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

TABLE I Component and material testing.-

Component and unit of product	Characteristic	Rqm't paragraph	Test method	Rqm't applicable to individual unit	#determ per sample unit	Results reported as	Sample unit
Dyed cloth, cotton bunting:	Colorfastness:						
(1 linear yd)	To light	3.4.1.1	5660	x	1	Satisfactory or	3"x4" piece
	To Bleaching	3.4.1.1	5600	x	1	unsatisfactory	3"x4" piece
Tape, fastening:	Colorfastness:					(for standard	
(1 linear yd)	To light	3.4.2.1.1	5660	x	1	sample) or good,	6" length
	To bleaching	3.4.2.1.1	5600	x	1	fair or poor	6" length
Tape, binding	Colorfastness:					(when no stand-	
and tie:	To light	3.4.2.2.1	5660	x	1	ard sample is	6" length
(1 linear yd)	To bleaching	3.4.2.2.1	5600	x	1	available)	6" length
Cloth, Cotton	Colorfastness:						
duck:	To light	3.4.3.1	5660	x	1		3"x4" piece
(1 linear yd)	To bleaching	3.4.3.1	5600	x	1		3"x4" piece
Webbing, cotton:	Colorfastness:						
(1 linear yd)	To light	3.4.4.1	5660	x	1		6" length
	To bleaching	3.4.4.1	5600	x	1		6" length
Thread (for	Colorfastness:						
case) (1 spool,	To light	3.4.5.1	4660	x	1		1 spool,
cone or tube)	To bleaching	3.4.5.1	4600	x	1		cone or tube
Paraffin (1 pound)	Melting point 140 degrees F	3.4.2.2.1	Std comm'l	x	2	Nearest degree F	2 oz
Flag and case markings	Colorfastness: To laundering	3.7.1	5610	x	2	Excellent, good fair or poor	(1)
Wood	Moisture content	3.4.10	MIL-W-6110	x	3	Average of 3 determinations to nearest 1%	1 block prior to turning
Thread lubricating compound	Composition	3.4.5.2	Std comm'l	composite	1	Pass or fail	1 pint

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T19:06Z
Check the source to verify that this is the current version before use.

(1) Consistent with each lot or batch of ink received, testing shall be performed to determine compliance with the specified performance requirements. Each sample unit shall be two, 4" X 4" swatches of the material being marked bearing the specified ink impression.

4.3.2 In-process inspection.- Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material or operation on which in-process inspection has indicated nonconformance. In-process inspection shall be conducted to see that accomplishment of the following is in accordance with the specified requirements:

Required operation of assembly	Rqm't para.
The flagstaff is sanded smooth and is given at least one dip or brush coat of the specified wood-preservative sealer.	3.6.1.1
The letters and applicable numbers are printed or stencilled prior to the application of the finish coat of varnish.	3.7.2
The wood used for the flagstaff is of one of the specified species	3.4.10

4.3.3 Inspection of the end item.-

4.3.3.1 Visual examination.- The defects found during examination shall be classified in accordance with 4.3.3.1.1 and 4.3.3.1.2. The lots shall be inspected in accordance with 4.3.3.1.3. The unit of product for these examinations shall be one flag set or component as applicable.

4.3.3.1.1 Examination of flag set or component as applicable for defects in design, material, construction, workmanship, and marking.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Classification Minor
General	Any defect of component or fabrication not specifically listed herein:		
	-seriously affecting serviceability . . .	X	-
	-affecting serviceability or appearance but not seriously	-	X
	Any component missing, damaged, or not specified type	X	-
Flagstaff			
Finish	Not finished	X	-
	Finish not as specified	-	X
	Not adherent, i.e., peeling, blistered, flaking, or area of thin film or no film	-	X
	Foreign matter imbedded or evidence of grease or dirt under varnish	-	X
	Scratch or gouge exposing bare wood	-	X
	Finish not smooth, or indication that the staff was not smoothly sanded prior to finishing	-	X
	Not dry (tacky to touch)	-	X
Design	Any characteristic not in accordance with drawing 5-1-336	X	-
Quality of wood	Check, split, crack, torn or raised-grain, rot, decay, pith, shake, or wane	X	-
	Unsound knot or hole, or burl with unsound center	X	-
	Sound knot exceeding 1/2 inch in the largest dimension	-	X
	More than one sound knot in any staff . . .	-	X
	Not straight, i.e., any warp, bow, crook, cup or twist exceeding 3/16 inch for length of flagstaff	X	-
Construction and workmanship	Splinter or sliver	-	X
	Groove or grooves for the tie tapes missing, misplaced, or not rounded and sanded smooth	X	-
	Groove or grooves undercut affording insufficient space for tapes or overcut, weakening the flagstaff (check visually measure when in doubt)	-	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Classification Minor
Flagstaff (Cont'd)			
Marking	Missing, not specified type, illegible, incorrect, wrong size or color, applied after varnishing, or not in the specified location	X	-
Flags			
Color	Not as specified	X	-
Fabric	Tie tape or loop missing, torn, or damaged	X	-
	Holes, or weakening defects, such as smashes, multiple floats, or loose and weakening slubs, etc., expected to develop into a hole	X	-
	Needle chews which may develop into a hole	-	X
	Scissors or knife cut, tear, mend, or burn	X	-
	Shade bars affecting appearance	-	X
	NOTE: Slight defects of shade bars, slubs, etc., and needle holes (not chews) not expected to enlarge, weaken the fabric, and not affecting appearance or serviceability, shall not be classified as a defect.		
Cleanness	Ink spots or stains of an obviously permanent nature	X	-
	Removable spots or stains, clearly noticeable	-	X
Seams and stitching	Thread not the color specified	-	X
	Seams twisted, puckered, or pleated, affecting appearance	-	X
	End of all stitchings (when not caught in another seam or hem) not securely backstitched	-	X
Thread breaks	Not backstitched	X	-
	Backstitched less than 1 inch	-	X
Bartack	Missing at tie tapes	X	-
	Thread breaks or loose stitching	-	X
	Less than 5/8 inch long with 1/8 inch bight	-	X
	Less than 28 stitches through superimposed tape	-	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Classification Minor
Flags (Cont'd)			
Gage of stitching	Irregular, i.e., unevenly gaged, or stitchings not uniform, seriously affecting appearance	-	X
Open seams and runoffs (on hems)	1/2 inch or more	X	-
	Less than 1/2 inch at two or more places .	X	-
(except hems)	1/4 inch or less at one place	-	X
	1/4 inch or less two or more places	X	-
	NOTE: One or more broken or two or more continuous, skipped, or runoff stitches constitute an open seam. Double-stitched seams are considered open when the opening occurs on either one or both sides of the seam.		
Raw edges (except hems)	More than 1/4 inch but not more than 1 inch	-	X
	More than 1 inch	X	-
(on hems)	1/4 inch or less at two or more places . .	-	X
	1/2 inch or more	-	X
	Less than 1/2 inch at two or more places .	-	X
	NOTE: Raw edges not securely caught in stitching shall be classified as an open seam.		
Seam and stitch type	Wrong seam type	-	X
	Not type 301 stitching	-	X
	Not double stitched except at top and bottom of flag	-	X
	Stitch tension too loose resulting in a loose seam	-	X
	Tight tension (stitches break when normal strain is applied to the seam or stitch).	-	X
	NOTE: Puckering is evidence of tight tension. When puckering is evident the inspector shall test seam by exerting normal pull in the lengthwise direction of the seam.		
	Eight or less stitches per inch	X	-
	Nine stitches per inch	-	X
	Thread ends not trimmed	-	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Classification Minor
Flags (Cont'd)			
Marking	Missing, illegible, not black, misplaced, or incorrect size	-	X
Case			
Fabric	Holes, cuts, or tears	X	-
	Other fabric defects: -seriously affecting serviceability or appearance	X	-
	-affecting serviceability or appearance but not seriously	-	X
Seams and stitching	More than 3/8 inch but not more than 1 inch	-	X
Open seams	More than 1 inch	X	-
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped stitches or runoffs occur		
Raw edges (except on inside of case)	When securely caught in stitching: -3/4 inch or more, but not more than 3 inches	-	X
	-more than 3 inches	X	-
	NOTE: Raw edges not securely caught in stitching shall be classified as open seams.		
Runoffs (see open seams)			
Seam and stitch type	Wrong seam or stitch type: -seriously affecting serviceability	X	-
	-affecting serviceability but not seriously	-	X
Stitch tension	Loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in excessive puckering of fabric on seams	-	X
Stitches per inch	One or two stitches less than minimum specified	-	X
	Three or more stitches less than minimum specified	X	-
	One or more stitches in excess of maximum specified	-	X
Stitching margins	Under or over specified width by more than 1/16 inch	-	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Classification Minor
Case (Cont'd)			
Thread breaks	Backstitched less than 1 inch	-	X
	NOTE: Thread breaks not backstitched shall be classified as open seams.		
Stitching ends	Not backstitched (except where ends are held down by other stitching).	-	X
Stitching	Any required row of stitching omitted:		
	-seriously affecting serviceability . . .	X	-
	-affecting serviceability, but not seriously	-	X
Cross-box-stitching	Incomplete:		
	-one row of stitching omitted	-	X
	-two or more rows of stitching omitted . .	X	-
	Length of boxstitching less than specified by more than 1/8 inch	-	X
Components and assembly	Defects of components or assembly (not specifically classified):		
	-seriously affecting serviceability . . .	X	-
	-affecting serviceability, but not seriously	-	X
	Any required component or part of case omitted	X	-
	Needle chews which may develop into holes .	-	X
	Mends or darns	-	X
Detail of construction			
Binding	Loosely or improperly applied	-	X
Flap and bottom	Edge of flap or bottom corners irregularly shaped	-	X
Billet and chapes	Set off center of front or off center of flap:		
	-by 1/4 inch or more	-	X
Straps "A" and "B" with rivets	Misplaced, failing to serve intended purpose	X	-
	Rivets set out of specified location:		
	-seriously affecting serviceability . . .	X	-
	-affecting serviceability but not seriously	-	X
	Clip end clinched excessively tight, cutting webbing	-	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

Examine	Defects	Classification Major	Classification Minor
Case (Cont'd)			
	Clip end improperly clinched, i.e., webbing not flat at point of entrance . .	-	X
Grommets	Set out of specified location:		
	-seriously affecting serviceability . . .	X	-
	-affecting serviceability but not seriously	-	X
Tie tapes	Ends not dipped in paraffin	-	X
	Ends dipped less than 1/2 inch	-	X
Marking	Omitted, illegible, incorrect, misplaced, or size characters not as specified . . .	-	X
Cleanness	Grease or oil stains, clearly noticeable; thread ends not trimmed throughout	-	X
Assembly	Any component missing (check contract for number of flags and flagstaffs required for each case)	X	-

4.3.3.1.2 Examination of flag set for defects in dimensions.- Any dimension which is not within the specified tolerance indicated below shall be classified as a defect. Unless otherwise specified, tolerances permitted shall be as follows:

Flagstaff:

Diameter of the flagstaff	+1/16, -0 inch (top) +1/16, -1/32 inch (bottom)
Diameter at centerline of upper groove . .	±1/32 inch
Diameter at centerline of lower groove . .	±1/32 inch
Length of staff	±1/4 inch
Center of marking	±1/16 inch
Other dimensions	±1/16 inch

Flag:

Fly and hoist	±1/4 inch
Distance from top of flag to centerline of marking	±1/8 inch
Center of tape loop, from lower edge of flag	±1/4 inch

Case:

Overall length	±1/4 inch
Overall width	±1/4 inch

Other dimensions shall be ± 1/16 inch and shall be compensating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

4.3.3.1.3 Inspection levels and acceptable quality levels (AQL's).- Inspection levels and acceptable quality levels, expressed in defects per hundred units shall be as follows:

	Inspection level	AQL Major	Total
For examinations applicable to 4.3.3.1.1	II	4.0	25.0
For examinations applicable to 4.3.3.1.2	S-4	(one class)	4.0

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing, and marking comply with the requirements of section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Shipping containers fully prepared for delivery shall be examined for the defects of closure listed below. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, any component damaged, affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, inadequate stapling.
Content	Number per container is more or less than required.

4.4 Tests.- Testing shall be conducted in accordance with test methods prescribed in CCC-T-191 and as specified in subsidiary specifications and in Table I. The sample size (number of units of product) shall be as shown below. The lot shall be unacceptable if one or more units of product fail to meet any test requirement specified.

Lot Size	Sample Size
800 or less	2
801 to 22,000	3
22,001 and up	5

5. PREPARATION FOR DELIVERY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.-

5.1.1.1 Unit packaging.-

5.1.1.1.1 Flag, MC-44.- Each flag (flag and flagstaff) shall be furled and packaged in a snug-fitting transparent polyethylene bag. The polyethylene film shall be a minimum of 0.002 inch thick. All seams and closures shall be made by heat sealing. Prior to or during the heat sealing closure operation, excess air within the bag shall be expelled.

5.1.1.1.2 Case, CS-16.- None.

5.1.1.1.3 Flag set.- Each flag set shall consist of two flags (packaged as specified in 5.1.1.1.1) and one case. The flags shall be placed within the case and the flap secured. The carrying straps shall be brought around the case front and buckled. Each flag set shall then be packaged in a 0.004 inch thick transparent polyethylene bag. All seams and closures shall be made by heat sealing. Prior to sealing, all excess air shall be removed.

5.1.1.2 Intermediate packaging.-

5.1.1.2.1 Flag, MC-44.- None.

5.1.1.2.2 Case, CS-16.- Each case shall have the flaps secured and the carrying strap brought around the front and buckled. Five cases, with the flaps alternately reversed shall be neatly stacked in a bundle. The top case shall be placed front down and the bundle securely tied with cotton tape or twine approximately 3 inches in from each end.

5.1.1.2.3 Flag set.- Four flag sets packaged as specified in 5.1.1.1.3 shall be packaged in an intermediate container conforming to W5C of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.1.2 Level C.- The flags, cases or flag sets shall be packaged to afford adequate protection against deterioration and damage during shipment from supply source to first receiving activity for immediate use or controlled humidity storage.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 20261O-21T19:06Z
Check the source to verify that this is the current version before use.

5.2.1 Level A.-

5.2.1.1 Flag, MC-44.- Sixty (60) flags packaged as specified in 5.1.1.1.1 shall be packaged flat, one in length, five in width and twelve deep, in a snug-fitting shipping container conforming to PPP-B-601 overseas type or class 2 of PPP-B-621. Closure shall be in accordance with the appendix of the applicable container specification.

5.2.1.2 Case, CS-16.- Eighteen bundles (90 cases, packaged as specified in 5.1.1.2) shall be packed flat, one in length, three in width and six deep in a snug-fitting shipping container conforming to PPP-B-601 overseas type or class 2 of PPP-B-621. Box closure shall be in accordance with the appendix of the container specification.

5.2.1.3 Flag sets.- Thirty-two (32) flag sets (8 intermediate packages) packaged as specified in 5.1.1.1.3, shall be packed in a snug-fitting shipping container specified in 5.2.1.2.

5.2.2 Level B.- Flags, cases and flag sets shall be packed as specified in 5.2.1.

5.2.3 Level C.- Flags, cases and flag sets packaged as specified in 5.1, shall be packed in such a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates available for such supplies. Shipping containers shall be in accordance with the rules and regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, unit packages, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The flag set covered by this specification is intended to be used as signal equipment.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When only a component is required (see 2.1).
(c) When a guide sample will not be furnished (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:06Z
Check the source to verify that this is the currentversion before use.


(d) When standard samples will not be furnished (see 3.2).
(e) When a preproduction sample is not required (see 3.3).
(f) Selections of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Samples.- Guide samples and standard samples required should be obtained from the procuring office issuing the invitation for bid.

Custodians:
Army - IH
Air Force - 11
Navy - SA
Review Activities:
Army - IH
Air Force - 11, 82, 85
Navy - SA, MC
User Activities:
Army - SM
Navy - CG
Preparing Activity:
The Institute of Heraldry,
United States Army

Project Number 8345-0060

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

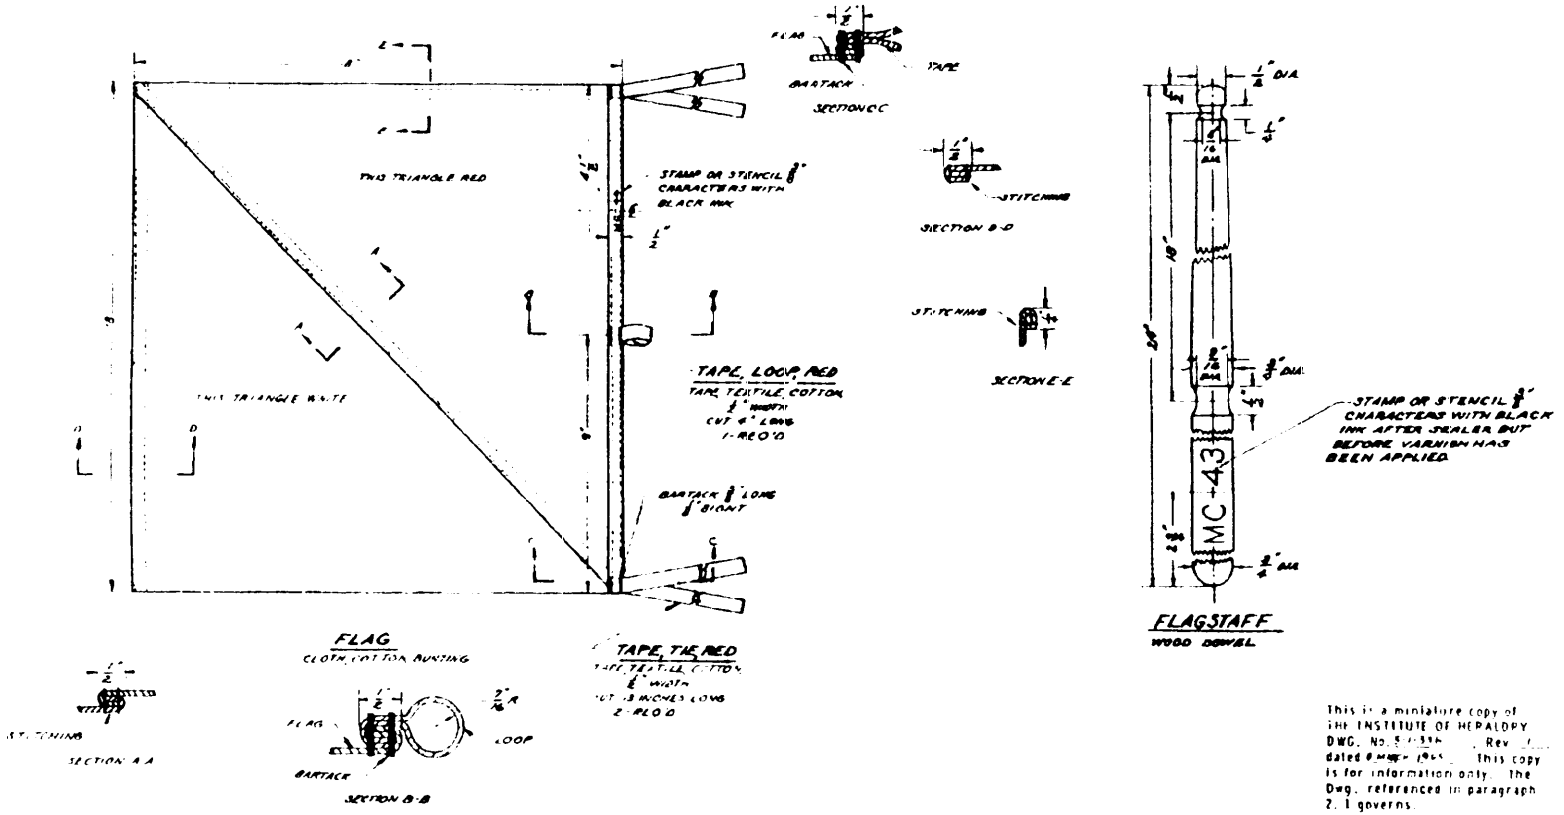

This is a miniature copy of THE INSTITUTE OF HERALDRY DWG. No. [illegible] Rev [illegible] dated [illegible] this copy is for information only. The Dwg. referenced in paragraph 2. 1 governs.

DEPARTMENT OF DEFENSE
DEPARTMENT OF THE ARMY
THE INSTITUTE OF HERALDRY

FLAG MC-44
AND
FLAGSTAFF MC-43

FIGURE - 1

Source: https://assist.dla.mil -- Downloaded: 20260-21T19:06Z
Check the source to verify that this is the current version before use.

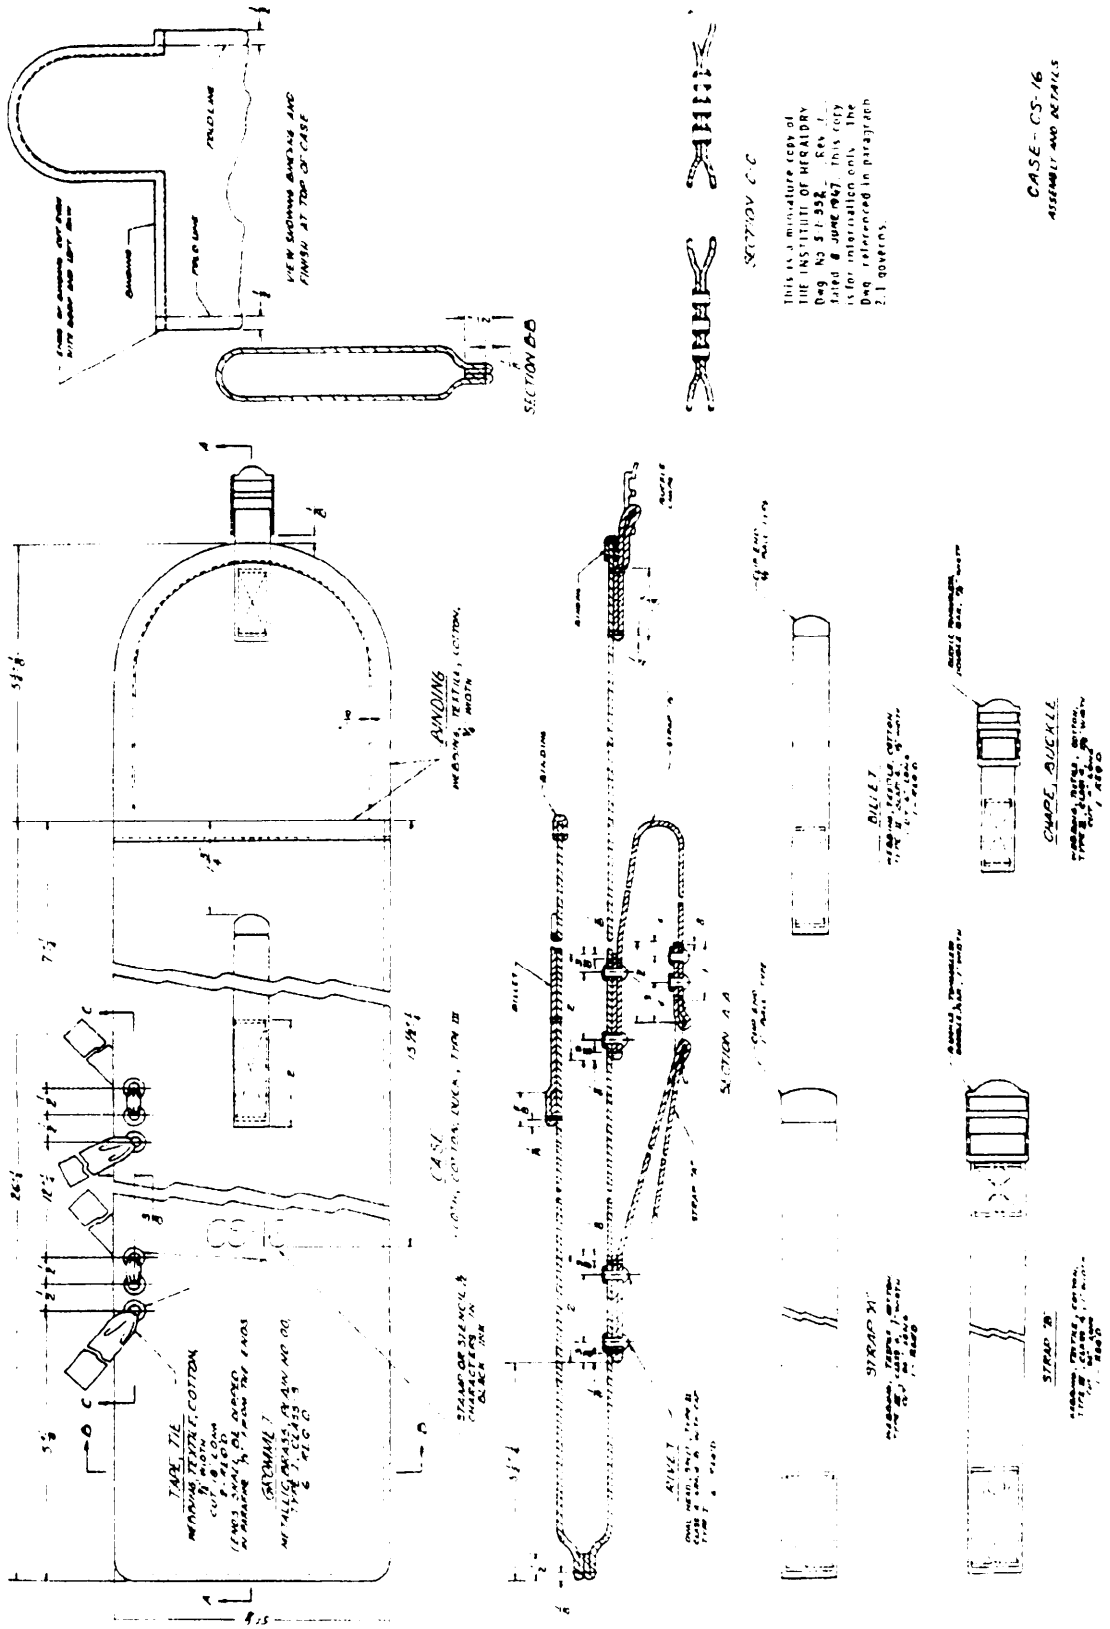


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

ORGANIZATION | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT

$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
THE INSTITUTE OF HERALDRY, U.S. ARMY
CAMERON STATION
ALEXANDRIA, VA. 22314

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

COMMANDING OFFICER
THE INSTITUTE OF HERALDRY, U.S. ARMY
ATTN: AGAH-T
CAMERON STATION
ALEXANDRIA, VA. 22314

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:06Z
Check the source to verify that this is the current version before use.