MIL-P-40029B
28 June 1968
SUPERSEDING
MIL-P-40029A
14 November 1960

MILITARY SPECIFICATION

PANEL MARKER, AERIAL LIAISON, COTTON DUCK, PANEL AL-125

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size of white cotton duck panel marker used by the Departments of the Army and the Air Force.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285 - Thread, Polyester
QQ-S-781 - Steel Strapping, Flat
TT-E-529 - Enamel, Alkyd, Semi-Gloss
TT-P-636 - Primer Coating, Alkyd, Wood and Ferrous Metals
CCC-C-419 - Cloth, Duck, Cotton, Unbleached, Plied Yarns, Army and Numbered
CCC-D-950 - Dyeing and Aftertreatment Processes for Cotton Cloth
CCC-T-191 - Textile, Test Methods
DDD-L-20 - Label; For Clothing, Equipage and Tentage (General Use)
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Box, Fiberboard

/FSC 8345/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-G-16491 - Grommet, Metallic
MIL-W-6110 - Wood, Determination of Moisture Content
MIL-S-13518 - Sealer, Surface, Wood Preservative
MIL-T-43566 - Tape, Textile, Cotton, General Purpose, Natural or in Colors

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors
Fed. Std. No. 751 - Stitches, Seams and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

QUARTERMASTER CORPS

2-3-110 - Panel Marker, Ground Signal to Aircraft, Cotton Duck; Assembly, Sections and Details

(Copies of specifications, standards and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)
(Figure 1 is a miniature reproduction of the referenced drawing and is attached for information only.)

3. REQUIREMENTS

3.1 Standard sample.- Unless otherwise specified (see 6.2 and 6.3), a standard sample of the treated duck shall be furnished for matching luminous reflectance, fastness of fluorescent brightener to chlorine bleaching and fastness to light only.

3.2 Preproduction sample.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished panel marker shall be submitted or made available to the contracting officer or his authorized

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

representative for inspection and tests as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same manner and in the same facilities to be used for the production items.

3.3 Materials.- Materials shall conform to the referenced specifications and the requirements specified herein.

3.3.1 Cloth, cotton duck.- The cotton duck, before finishing, shall conform to type I, hard texture 12 of CCC-C-419.

3.3.1.1 Color and treatment.- The color shall be white, conforming to a shade standard (see 3.1 and 6.3). The finished panel shall have a luminous reflectance relative to magnesium oxide of not less than 75 percent. Bleaching of the fabric by any standard commercial method is permissible. The use of a fluorescent brightener fast to chlorine bleaching, having a spectral emission with a peak response in the blue portion of the spectrum is required (see 4.4.1 and 4.4.4). The pH of the finished cloth shall be not less than 5 nor more than 8 when tested as specified in 4.4.3. The cloth shall be water-repellant and mildew-resistant treated in accordance with class B, using mildew inhibitor (i) of CCC-D-950. The finished fabric shall show no more yellowness than the standard sample after 20 hours exposure when tested as specified in 4.4.2.

3.3.2 Tape.- The tape shall conform to type I, class 1a, 3/4 inch in width of MIL-T-43566.

3.3.3 Thread, polyester.- The thread for stitching shall conform to type 1, class 1 of V-T-285. Thread sizes shall be as follows:

For all stitching except stitching indicated by "Z" on the drawing - Size FF for needle and bobbin

For all stitching indicated by "Z" on the drawing - Size FF for needle and size F for looper.

3.3.4 Grommets.- The grommets for the panel shall conform to type III, class 3, size 2 of MIL-G-16491.

3.3.5 Screws.- The screws for attaching the duck to the pole shall be steel machine screws 5/16 inch in diameter and 1-3/4 inches long having 18 threads to the inch and a standard washer and hexagonal nut. The screw, washer and nut shall have an electro-galvanized finish.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

3.3.6 Enamel.- The enamel for the pole shall be a semi-gloss, air drying enamel conforming to TT-E-529. The color shall be olive drab conforming to Color No. X24087 of Fed. Std. No. 595.

3.3.7 Primer.- The primer for the pole shall conform to TT-P-636.

3.3.8 Sealer.- The wood sealer used on the pole shall conform to type II of MIL-S-13518.

3.3.9 Wood.- The wood for the pole shall conform to standard molding grades. The wood shall be sound and free from defects except surface checks not exceeding 1/32 inch in width and 10 inches in length and scattered, sound pin knots not exceeding 1/8 inch in diameter will be permitted. Stained areas are acceptable provided there is no evidence of decay. The wood shall be dried to a moisture content of 8 to 12 percent as determined in accordance with MIL-W-6110. Any of the following species of wood will be acceptable:

Spruce
Cedar; Western Red
Pine; Ponderosa, Sugar, Northern white or Western (Idaho) white

3.4 Construction.- Construction shall be in accordance with drawing 2-3-110 and as specified herein.

3.4.1 Pole.- The pole shall be fabricated from wood specified in 3.3.9 and sanded smooth after fabrication but prior to assembly. The pole shall be finished as follows:

a. The wood shall be treated with a wood sealer as specified in 3.3.8 with an extra coat applied to the end grains.
b. The wood shall then be coated with primer specified in 3.3.7.
c. A finish coat of enamel specified in 3.3.6 shall then be applied.

3.4.2 Panel.- The panel shall be fabricated from cotton duck specified in 3.3.1.

3.4.3.1 Stitching.- All stitching shall be accomplished using thread specified in 3.3.3. The stitching shall conform to Fed. Std. No. 751 as follows:

For all stitching except stitching indicated by "Z" on the drawing - Stitch type 301 shall be used having 6 to 8 stitches to the inch.
For all stitching indicated by "Z" on the drawing - Stitch type 401 shall be used having 6 to 8 stitches to the inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

3.4.2.1.1 Type 301 stitching.- Thread breaks in stitching shall be backstitched not less than one inch at each break. Stitching shall be backstitched at the ends not less than one inch, except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that the lock will be embedded in the center of the materials sewed. All thread ends shall be trimmed.

3.4.2.1.2 Type 401 stitching.- Thread breaks in stitching shall be overstitched not less than 1-1/2 inches at each break. Thread tension shall be maintained so that there will be no loose stitching. All thread ends shall be trimmed.

3.4.2.2 Setting of grommets.- Grommets specified in 3.3.4 shall be located as shown on drawing 2-3-110. Holes punched to receive the grommets shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommets shall be securely clinched without cutting the materials.

3.4.2.3 Splicing of panels.- The markers may be made of one or two panels of duck, but not more than two panels. Panels may contain a single splice located no closer than 6 feet to the end. Splices in adjacent panels shall not be adjacent to each other. The method of splicing shall be as shown on drawing 2-3-110.

3.5 Assembly.- The panel marker shall be assembled to the pole as shown on drawing 2-3-110, using machine screws specified in 3.3.5.

3.6 Marking.- The identification markings shall conform to the requirements for type IV, class 5 labels of DDD-L-20. In addition, the letters U.S. and markings "PANEL AL-125" shall be applied in the size characters and location indicated on the drawing and shall conform to the requirements for type IV, class 9 labels of DDD-L-20. Fastness shall be as specified for class 5 labels.

3.7 Workmanship.- The panel marker shall be clean, well made and shall meet the acceptable quality levels established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.2 Preproduction sample inspection.- Inspection and testing of the preproduction sample shall be made on a completely finished insignia for all provisions of this specification applicable to end product examination and tests.

4.3 Inspection for acceptance.- Inspection shall be in accordance with the provisions set forth in MIL-STD-105 except when otherwise specified hereafter.

4.3.1 Inspection of components.-

4.3.1.1 Testing of components.- In addition to the quality assurance provisions of subsidiary specifications and standards, inspection shall be performed on components and materials listed in table I for the test characteristics shown. The inspection level shall be S-1 and the acceptable quality level shall be 4.0 defects per hundred units. The requirements are applicable to the sample unit.

TABLE I Testing of components.-

Component and unit of product	Characteristic	Rqm't para.	Test method	#determ per s/u	Results reported as	S/U
Treated duck (1 roll)	Luminous reflectance	3.3.1.1	4.4.1	1	To nearest 1.0 percent	1 yard
	Colorfastness of fluorescent brightener to chlorine bleaching	3.3.1.1	4.4.4	1	Satisfactory or unsatisfactory	
	Colorfastness to light	3.3.1.1	4.4.2	1	Satisfactory or unsatisfactory	
	pH value	3.3.1.1	4.4.3	1	Satisfactory or unsatisfactory	
Wood pole (each)	Moisture content	3.3.9	MIL-W-6110	3	Aver. of 3 determ per s/u to nearest 1.0%	1 pole strip

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

4.3.2 In-process inspection.- Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated non-conformance. In-process inspection shall be conducted as follows:

a. Quality and species of wood used in the fabrication of the wood pole as specified in 3.3.9.
b. Treatment and finishing of the wood pole as specified in 3.4.1.

4.3.3 Examination of the end item.-

4.3.3.1 Visual examination of panel marker.- The defects found during examination shall be classified in accordance with 4.3.3.1.1 and 4.3.3.1.2. The sample unit for these examinations shall be one finished panel including pole. The lots shall be inspected in accordance with 4.3.3.1.3 and 4.3.3.1.1.

4.3.3.1.1 Examination of visual characteristics.- Defects designated by an asterisk (*) shall be classified as major when seriously affecting appearance and serviceability and minor when affecting appearance and serviceability but not seriously.

Examine	Defect	Classification		
		Major	(*)	Minor
Fabric	Holes, cuts or tears	x	-	-
	Other fabric defects:			
	Seriously affecting serviceability	x	-	-
	Affecting serviceability, but not seriously	-	*	-
Webbing (tie tapes)	Edges frayed or scalloped	-	*	-
	Less than specified length:			
	By more than 3/8 inch, but less than 3/4 inch	-	-	x
	By more than 3/4 inch	-	*	-
	Misplaced, failing to serve intended purpose	x	-	-
Grommets	Broken or malformed; finish omitted; burrs or sharp edges which may damage the item or cause injury in handling	x	-	-
	Size or type not as specified:			
	Seriously affecting serviceability	x	-	-
	Affecting serviceability, but not seriously	-	*	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	(*)	Minor
	Improperly clinched; two or more teeth exposed inside of barrel; clinched loosely, causing grommet to rotate in hole.....	-	-	x
	Clinched excessively tight, cutting fabric or insecurely clinched, i.e., grommet or washer becomes disengaged.....	x	-	-
	Set with rim even with or extending beyond edge of hem.....	x	-	-
	End grommets set with rims extending beyond box stitching.....	x	-	-
	Intermediate grommets unequally spaced by more than one inch.....	-	*	-
Seams and stitching	On stitch type 301:			
Open seams	More than 1/2 inch, but not more than one inch.....	-	-	x
	More than one inch.....	-	*	-
	On stitch type 401; except runoffs.....	x	-	-
	Runoffs on stitch type 401:			
	More than 1/2 inch, but not more than one inch.....	-	-	x
	More than one inch.....	-	*	-
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped stitches or runoffs occur. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.			
Raw edges	When securely caught in stitching:			
	More than one inch, but less than 2 inches.....	-	-	x
	More than 2 inches.....	-	*	-
	NOTE: Raw edges not securely caught in stitching shall be classified as as open seam. (see open seams)			
Seam and stitch type	Wrong seam or stitch type.....	x	-	-
Stitch tension	Loose resulting in a loosely exposed bobbin or top thread; tight, resulting in excessive tightness or puckering of fabric.....	-	-	x

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	(*)	Minor
Stitches per inch	One stitch less than minimum specified.....	-	-	x
	Two or more stitches less than minimum specified.....	-	*	-
	One or more stitches in excess of maximum specified.....	-	-	x
	NOTE: Variation in the number of stitches per inch, caused by the operator speeding up the machine and pulling the fabric to sew over heavy places or heavy seams, or in turning corners, shall be classified as follows: (a) Within the minor defect classification - no defect (b) Within the major defect classification - minor defect.			
Stitching margins and gage	Not as specified, affecting serviceability.	-	*	-
Thread breaks	Overstitched less than 1-1/2 inches on stitch type 401; backstitched less than one inch on stitch type 301.....	-	-	x
	NOTE: Thread breaks not overstitched or not backstitched shall be classified as open seams.			
Stitching ends	Backstitched less than one inch (except where ends are held down by other stitching or turned under in a hem).....	-	*	-
Stitching indicated by "Z"	Chain portion of stitching shown on outside of panel marker.....	-	*	-
Components and assemblies	Any required component part of operation omitted (unless otherwise classified herein).....	x	-	-
	Needle chews.....	x	-	-
	Seams badly pleated or puckered.....	-	-	x
	Cross-boxstitching less than specified length by more than 1/8 inch.....	-	-	x
Repairs	Mends, darns or patches.....	x	-	-
Construction detail defects:				
Hems	Twisted or pleated.....	-	-	x
	Less than specified width by more than 1/4 inch.....	-	-	x

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	(*)	Minor
	Constructed with partial turn-under where double turn-under is required.....	-	*	-
	Edge of pole hem uneven with surface of wood pole by more than 1/8 inch.....	-	-	x
Splicing of panels	More than one splice per panel; location of splice less than 6 feet from end; splices in panels adjacent to each other...	-	*	-
Marking; U.S. Identification and nomenclature	Omitted, incorrect, illegible or misplaced.....	-	-	x
Cleanness	Grease or oil stains; thread ends not trimmed throughout.....	-	-	x
Wood pole	Not finished as specified.....	x	-	-
	Not specified color; paint peeled, area of no film or thin film, finish not adherent..	-	*	-
	Split, crack or fracture; strips not one continuous piece; any evidence of decay or knot holes; any screw or nut missing....	x	-	-
	Screw head or nut recessed below crown of molding; not specified screw or nut.....	-	*	-
	Pole not smoothly sanded; moulding not symmetrically assembled; i.e., any overhang in excess of 1/16 inch.....	-	-	x
	Any sharp firm splinters that may be injurious to personnel or may damage the item; warped or bowed affecting serviceability.....	x	-	-
	Screw heads not all on the same side of pole molding.....	-	-	x

4.3.3.1.2 Defects in dimensions.- Any dimension that is not within the specified tolerances shall be classified a defect.

4.3.3.1.3 Inspection levels and acceptable quality levels (AQL's).- Inspection levels and AQL's expressed in defects per hundred units shall be as follows:

	Inspection level	AQL Major	AQL Total
For defects applicable to 4.3.3.1.1	II	6.5	40.0
For defects applicable to 4.3.3.1.2	S-1	(one class)	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to the closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per hundred units.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.
Workmanship	Inadequate application components such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Content	Number per container is more or less than required.

4.4 Tests.- The methods of testing specified in CCC-T-191 shall be followed wherever applicable.

4.4.1 Colorimetry.- Data shall be determined in accordance with procedures outlined in Handbook of Colorimetry and rules covered by International Committee on Illumination based on spectral evaluation by Beckman or GE Spectrophotometry.

4.4.2 Colorfastness to light.- Samples shall be exposed in accordance with method 5660 of CCC-T-191.

4.4.3 pH.- The pH of the finished fabric shall be determined in accordance with method 2810 or 2811 or CCC-T-191.

4.4.4 Colorfastness to chlorine.- The chlorine fastness of the fluorescent brightener shall be equal to the standard sample when tested in accordance with method 5600 of CCC-T-191. The fluorescent emission shall be checked under an ultraviolet source having a spectral distribution covering the wave lengths 0.3 microns to 0.4 microns with a maxima at approximately 0.36 microns.

5. PREPARATION FOR DELIVERY

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.- Each panel marker shall be evenly rolled around the attached pole, securely tied in place with the three end tapes and placed in a snug-fitting fiberboard box conforming to style FOL, grade V3c or V3s of PPP-B-636. The inside dimensions of the box shall be 5-1/2 inches by 5-1/2 inches by 84 inches. Box closure shall be in accordance with the appendix of the specification.

5.1.2 Level C.- Panel markers shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving station.

5.2 Packing.- Packing shall be level A,B, or C, as specified (see 6.2).

5.2.1 Level A.- Twenty panel markers packaged as specified in 5.1, shall be packed in a shipping container conforming to class 2, style 4 of PPP-B-621 or overseas type of PPP-B-601. The panel markers shall be packed four in width and five high. The inside dimensions shall be approximately 30 inches by 24 inches by 85 inches. Closure and reinforcement shall be in accordance with the appendix of the applicable container specification.

5.2.2 Level B.- Four panel markers packaged as specified in 5.1, shall be stacked two high and two wide and secured with 3 bands of flat steel strapping in accordance with type 1, class B, grade 1 of QQ-S-781.

5.2.3 Level C.- Panel markers packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates for such supplies. Containers shall be in accordance with the rules and regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The panel marker covered by this specification is intended to be used by ground units to signal aircraft.

6.2 Ordering data.- Procurement documents should specify the following:
(a) Title, number and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

(b) When a standard sample will not be furnished (see 3.1).
(c) When a preproduction sample is not required (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 For access to the standard samples address the procuring office issuing the invitation for bid.

Custodians:

Army - IH
Air Force - 82

Review Activities:

Air Force - 82, 85
Other - DP

User Activity:

Army - SM
Navy - CG

Preparing Activity:

The Institute of Heraldry,
United States Army

Project No. 8345-0065

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

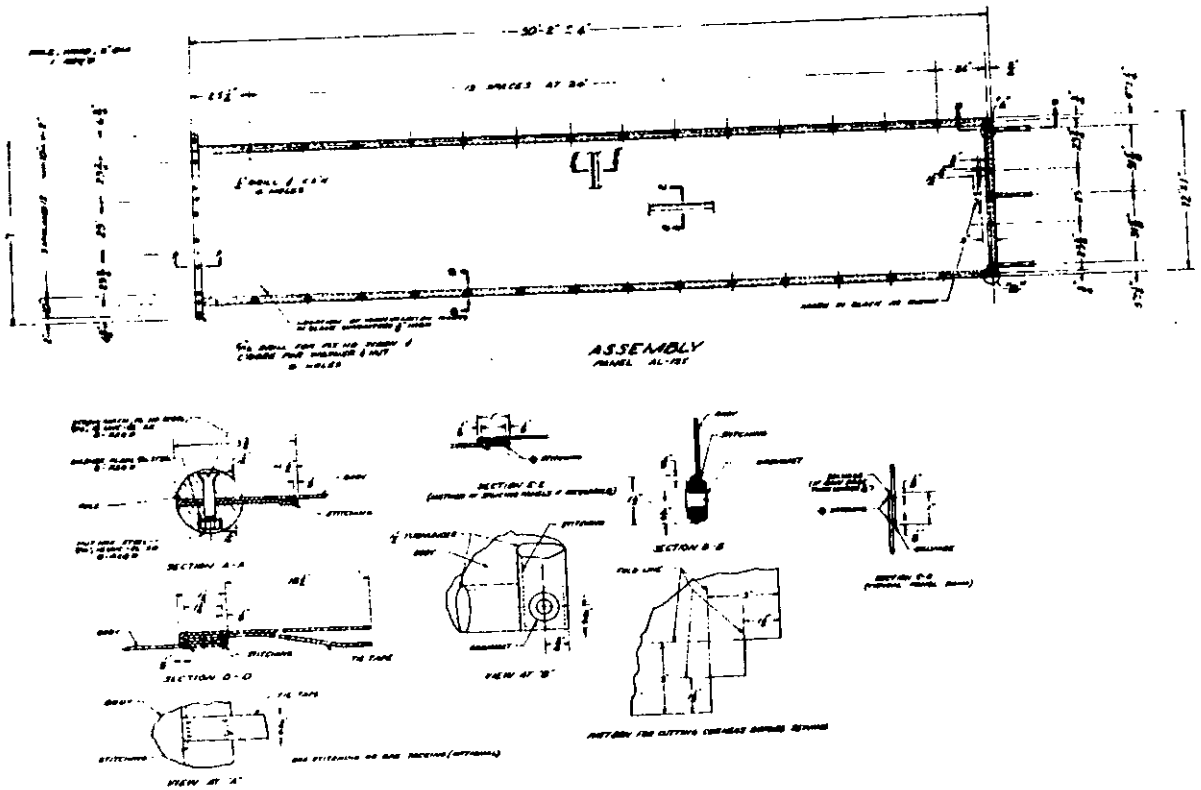


FIGURE - 1

This is a miniature copy of THE INSTITUTE OF HERALDRY DWG. No S/424 — Rev. —— dated October 1968 . This copy is for information only. The Dwg. referenced in paragraph 2.1 governs.

PANEL MARKER, AERIAL LIAISON
CATTON DUCK, PANEL AL 185
COLOR WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
THE INSTITUTE OF HERALDRY, U.S. ARMY
CAMERON STATION
ALEXANDRIA, VA. 22314

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

COMMANDING OFFICER
THE INSTITUTE OF HERALDRY, U.S. ARMY
ATTN: AGAH-T
CAMERON STATION
ALEXANDRIA, VA. 22314

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

MIL-P-40029 Panel Marker, Aerial Liaison, Cotton Duck, Panel AL-125

ORGANIZATION | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT

$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 OCT 61 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:02Z
Check the source to verify that this is the current version before use.