MIL-S-40022E
7 March 1985
SUPERSEDING
MIL-S-40022D
17 November 1971

MILITARY SPECIFICATION

SHOULDER STRAP, SIDE ARM, MILITARY POLICE, LEATHER, BLACK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers a shoulder strap which is a component of Military Police equipment.

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester.
FF-R-556	-	Rivet, Solid, Small; Rivet, Split, Small; Rivet, Tubular, Small; Burr; and Cap, Rivet; General Purpose.
KK-L-271	-	Leather, Cattlehide, Strap, Vegetable Tanned.
QQ-W-423	-	Wire, Steel, Corrosion-Resisting.
PPP-B-566	-	Boxes, Folding, Paperboard.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research and Development Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-B-676 - Boxes, Setup.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing.

MILITARY

MIL-B-2331 - Buckles, End Bar, With Tongue.
MIL-R-3390 - Rings, Dee.
MIL-F-10884 - Fasteners, Snap.
MIL-E-20652 - Eyelets, Metallic, With Washers.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized Unit Loads

DRAWINGS

U.S. ARMY NATICK RESEARCH AND DEVELOPMENT CENTER

2-4-22 - Shoulder Strap, Side Arm, Military Police, Leather, Black; Details and Assembly.

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19013.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Materials.

3.1.1 Leather. The strap leather shall be 6/64 and 8/64 inch thick as specified on Drawing 2-4-22 and shall conform to types I, II, III or IV, class 1 of KK-L-271 except that the thickness tolerances shall be plus 1/64 and minus 1/128 inch. The grain side of the leather shall be dyed black, and smooth finished, insuring a long-lasting lustrous finish. The color of the flesh side shall be natural.

3.1.2 Thread, polyester. The polyester thread for all stitching shall conform to type I, class 1, subclass A, size 3 of V-T-285.

3.1.2.1 Color. The thread shall be black and shall show fastness to perspiration equal to or better than the standard sample. When no standard sample is available, the thread shall show good fastness to perspiration.

3.1.3 Sealer. The tragacanth gum sealer used for finishing the edges of the leather shall be a commercial grade No. 3.

3.1.4 Buckle, wire, brass. The buckle shall be brass wire, 7/8 inch, conforming to type VI, class 1 of MIL-B-2331.

3.1.5 Eyelet and washer, brass. The eyelet shall conform to No. 4094 and the washer shall conform to No. 4096, style A of MIL-E-20652, except that the finish on washer and eyelet for shoulder straps shall be natural bright brass followed by a coating of lacquer.

3.1.6 Fastener, snap, brass. The snap fastener shall conform to style 2A of MIL-F-10884. The female components shall consist of a socket and a size 2 button except that the barrel of the button shall be of sufficient length to provide a full roll to hold the socket firmly. The male components shall consist of a stud and size 2 eyelet. The snap fastener for straps shall be in accordance with finish 2 (black enamel cap).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

3.1.7 Ring, dee. The dee ring shall be brass and shall conform to class 1, 1 inch by 7/8 inch, configuration W of MIL-R-3390 except that the finish on the dee ring for shoulder straps shall be bright brass followed by a coating of lacquer.

3.1.8 Staple, corrosion-resisting steel. The staple for attaching the standing loop and used as an alternate method of closing the sliding loop shall be corrosion-resisting steel wire conforming to condition B or C of QQ-W-423. The leg length of the staple shall be sufficient to penetrate the required thicknesses of leather with allowance for a minimum clinch of 1/16 inch and a maximum clinch of 1/8 inch.

3.1.9 Rivet, tubular, brass. The rivet used as an alternate method of attaching the standing loop shall be brass, tubular, 9/64 inch nominal diameter, 7/16 inch long conforming to type XII, class 2, grade F of FF-R-556. The rivet shall be star clinched.

3.1.10 Rivet, side prong, brass. The rivet used as an alternate method of closing the sliding loop shall be brass, side prong, 5/16 inch long conforming to E. P. Stimpson Company No. P407 or equal (see 6.3). Prior to the use of the "or equal" item, the contractor shall submit the item to the contracting officer with supporting data for approval.

3.2 Construction. The construction shall conform in all respects to Drawing 2-4-22 and as specified herein.

3.2.1 Stitches, seams and stitchings.- All seams and stitching shall conform to type 301 of FED-STD-751 with 4 to 6 stitches per inch and 1/8 inch stitching margin, all thread ends shall be tied and fused.

3.2.1.1 Type 301 stitching. Ends of stitching shall be backstitched or overstitched not less than 1 inch except where ends are turned under or caught in other seams and stitching. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be imbedded in the materials sewn.

3.2.1.2 Repairs of type 301 stitching. Repairs of 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch in back of the end of stitching.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

b. Thread breaks, or two or more consecutive skipped or runoff stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area, continue over the defective area and continue a minimum of 1 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.2.2 Setting of snap fasteners. A hole shall be prepunched to receive the button and eyelet components of the snap fasteners. The hole shall be smaller than the outside diameter of the button and eyelet barrels so that the barrel must be forced through the hole. The hole shall not be punched in the setting operation with the button or eyelet barrel. The fasteners shall be securely clinched without cutting the adjacent materials and no more than two splits shall occur in the button or eyelet barrels.

3.2.3 Replacement of defective components. During the cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.2.2 shall be removed from production and replaced with non-defective and properly matched components.

3.3 Marking. The contract number and marking "US" shall be indented in the leather in the size characters and in the locations shown on the drawing.

3.4 Workmanship. The finished shoulder strap shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.2.1.1 Certification. The contractor shall furnish a certificate of compliance certifying that the material and grade of the tragacanth gum conforms to the requirements specified in 3.1.3.

4.2.2 End item visual examination. The end item shall be examined for the defects listed in table I. The lot size shall be expressed in units of straps. The sample unit shall be one strap. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

TABLE I. End item visual defects

Examine	Defect	Classification Major	Minor
Leather components	Not specified color.	X	
	Color not uniform.		X
	Edges of leather not rounded on flesh side.		X
Thread	Not specified color.	X	
Metal components	Not specified color or finish.	X	
Cleanness	Any non-removable stain or spot.	X	
	Any spot or stain removable with cleaning agent		X
Material	Any component not fabricated of the specified material.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Construction and workmanship	Any component or assembly omitted or misplaced, operation omitted or not properly performed. (i.e; adjustment hole or holes omitted; buckle end of belt not skived on flesh side; fastener misplaced so that male portion of fastener is not in alignment with female portion to effect closure; or staples inserted through flesh side of belt loop so that prongs lie on grain side of leather.)	1/	
	Any part defective, damaged, fractured, ripped, punctured, torn, or malformed.	1/	
	Not creased, or irregularly creased affecting appearance.		X
	Shoulder strap not fabricated with grain side of leather on exterior side of shoulder strap.	X	
Quality of leather	Not full grain, or not full grain lightly snuffed.	X	
	Any hole where not required, cut or rupture.	X	
	Brand mark, healed grub damage, scar tissue, hip mark, brittle or bony area.	1/	
	Abraded, scratched, or other grain damage.	1/	
	Flanky, spongy, pipey, or stretchy leather.	1/	
	Any wrinkle.	1/	
	Slaughter cut.	1/	
	Flesh side not smooth or contains loose flesh in excess of 1 square inch.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Snap fasteners	Any fastener not functioning properly i.e. fails to snap closed, provide a secure closure or to open freely.	X	
	NOTE. The fasteners shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure.		
	Clinched excessively tight, cutting adjacent material	X	
	Clinched loosely, permitting any component to rotate freely but not to the degree that any component can be expected to become detached during use.		X
	Clinched loosely to the degree that components can be expected to become detached during use.	X	
	NOTE. Incomplete roll of end of button eyelet barrel is evidence of improper and insecure clinching.		
	Incorrect style.	X	
	More than 2 splits in eyelet or button barrels.		X
Staple	Staples not properly clinched, but will adequately retain belt loop and will not be injurious to user.		X
	Staples not properly clinched so that belt loop may separate in service or prong may be injurious to user.	X	
	Any sharp edges, burrs, or metal slivers.	X	
	Machine or die mark affecting appearance.		X
	Coating not adherent, i.e., flaking, peeling, or blistered.		X
	Standing loop rivet, when applicable, not star clinched.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Open seams	Any open seam not repaired.	X	
	Repair of open seam not as specified.		X
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped or runoff stitches occur.		
Seam and stitch type	Wrong stitch type.	X	
Stitches, tension	Loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in tightness of seams.	X	
Stitches per inch	Less than minimum specified.		X
	One or more stitches in excess of maximum specified.		X
Thread ends	Not tied.		X
	Not fused.		X
Marking	Omitted, illegible, incorrect, not specified type or size, misplaced, or not applied in specified manner.		X

1/ Defect shall be scored as a major defect when seriously affecting serviceability or appearance, and as a minor defect when affecting serviceability or appearance but not seriously.

4.2.3 End item dimensional examination. The end item shall be examined for conformance to the specified dimensions. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of straps. The sample unit shall be one strap. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

4.2.4 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged except that it need not be closed. Examination of closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping or taping, or inadequate stapling. Bulged or distorted container.
Content	Subassemblies in packages not arranged as shown in figure 2. Number of unit packs per shipping container is more or less than required. Number of shoulder straps per unit pack is more or less than required. 1/

1/ For this defect, four unit packs shall be examined from each shipping container in the sample.

4.2.5 Palletization examination. An examination shall be made to determine that palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each shoulder strap with dee rings attached shall be disassembled from the base. Each carrying strap shall be folded with the double portion inside so that the completed fold approximates 9-1/2 inches in length. Each folded strap shall then be tied at the center with cotton tape or twine. Six folded straps and six bases of one class only shall be arranged and unit packed in a folding, set-up box as shown in figure 1. The folding, set-up box shall conform to variety 1, style III, type G, class i, subclass I of PPP-B-566; type I, variety 1, class A, style 4 of PPP-B-676, respectively. Inside dimensions of each paperboard box shall be 9-3/4 inches in length, 7 inches in width, and 3-1/2 inches in depth. Box closure shall be secured with 2 inch minimum width, gummed paper tape conforming to type III, grade B of PPP-T-45, applied at the center of the length opening and extending along the bottom and up the sides at least two inches.

5.1.2 Commercial. Shoulder straps shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. One hundred and ninety-two shoulder straps, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A unit packs shall be packed flat four in length, two in width, and four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 29 inches in length, 20 inches in width, and 14-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed, in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in PPP-B-636, except that inspection shall be in accordance with 4.2.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. One hundred and ninety-two shoulder straps, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A unit packs shall be packed flat four in length, two in width, and four in depth within a shipping container. Inside dimensions of each shipping container shall approximate 29 inches in length, 20 inches in width, and 14-1/2 inches in depth. Approximate dimensions are fur-nished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.2.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the method III as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.2.4

5.2.3 Commercial packing. Shoulder straps, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), shoulder straps packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. The shoulder straps are intended for use by members of the Military Police of the U. S. Army and are used with a leather belt. Shoulder straps are designed to support a leather holster which is attached to the base of the strap with a double hook.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
c. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
d. When palletization is required (see 5.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

6.3 Rivet No. P407. One source of supply of rivet No. P407 is the E. P. Stimpson Company, Brooklyn, New York.

6.4 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:

Army - GL
Air Force - 82

Review activities:


Army - MD
Air Force - 11
DLA - CT

Preparing activity:


Army - GL

Project No. 8465-0894

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

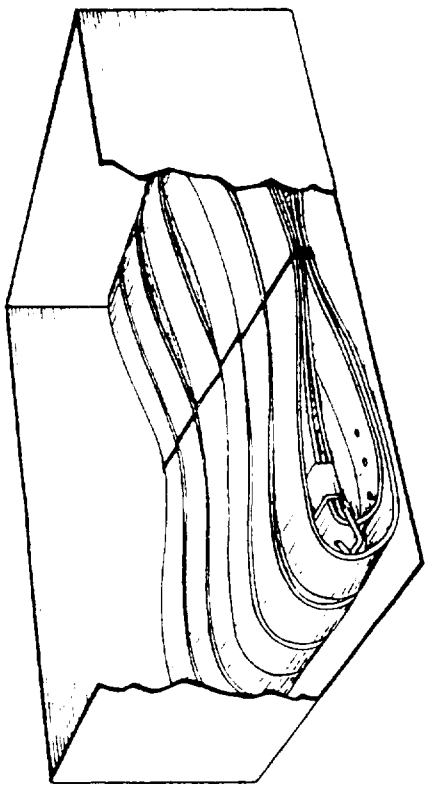

STEP - I

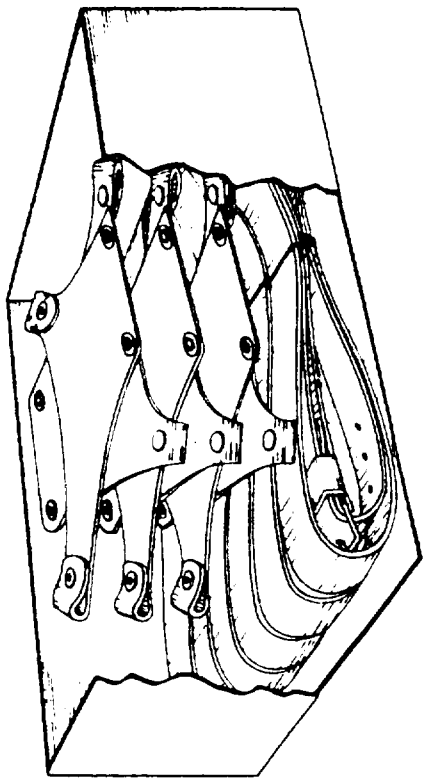

STEP II

METHOD OF PACKAGING SHOULDER STRAPS IN INTERMEDIATE BOX

FIGURE-1 SHOULDER STRAP, SIDE ARM, MILITARY POLICE, LEATHER, BLACK; METHOD OF PACKAGING IN INTERMEDIATE BOX

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Center
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-40022E	Shoulder Strap, Side Arm, Military Police, Leather, Black

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:01Z
Check the source to verify that this is the current version before use.