MIL-T-40057B(GL)

19 March 1969
SUPERSEDING
MIL-T-40057A(GL)
23 November 1964

MILITARY SPECIFICATION

TABLE, WRAPPING, PLYWOOD, ALUMINUM TOP

1. SCOPE

1.1 This specification covers one type of table for wrapping small items and for the storage of wrapping materials and tools (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-A-250/4	- Aluminum Alloy 2024, Plate and Sheet
QQ-S-698	- Steel, Sheet and Strip, Low Carbon
QQ-S-741	- Steel, Carbon: Structural Shapes; Plates; and Bars
QQ-S-777	- Steel, Carbon, Strip, Cold-Rolled, Untempered Spring Quality
WW-P-406	- Pipe, Steel (Seamless and Welded) (for Ordinary Use)
MMM-A-125	- Adhesive, Casein-Type, Water-and-Mold-Resistant
MMM-A-188	- Adhesive, Urea-Resin-Type (Liquid and Powder)
PPP-B-601	- Boxes, Wood, Cleated-Plywood
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner
PPP-C-650	- Crates, Wood, Open and Covered
PPP-T-60	- Tape; Pressure-Sensitive Adhesive, Waterproof, for Packaging
PPP-T-97	- Tape; Pressure-Sensitive Adhesive, Filament Reinforced

MILITARY

MIL-T-704	- Treatment and Painting of Material
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold Application

FSC 7195

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods

DRAWINGS

ARMY NATICK LABORATORIES

5-8-133 - Table, Wrapping, Plywood, Aluminum Top (Assembly)
5-8-134 - Table, Wrapping, Plywood, Aluminum Top (Details)

(Miniature copies of Drawings 5-8-133 and 5-8-134, identified as figure 1 and 2, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

Specification D 2016-65 Methods of Test for Moisture Content of Wood

(Application for copies should be addressed to American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

UNITED STATES DEPARTMENT OF COMMERCE COMMERCIAL STANDARDS

U.S. Product Standard PS 1-66 - Softwood, Plywood/Construction and Industrial

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:06Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article.- Unless otherwise specified (see 6.2), before production is commenced, a finished table covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.- Materials not definitely specified shall be of the quality normally used by the manufacturer for wrapping tables, provided the completed item complies with all provisions of this specification.

* 3.2.1 Aluminum alloy 2024, plate and sheet.- The aluminum alloy plate and sheet shall conform to 2024-T4 of QQ-A-250/4.

* 3.2.2 Steel.-

* 3.2.2.1 Steel, sheet and strip, low carbon.- The steel sheet and strip shall be low carbon, hot rolled, any temper, quality, finish, and edge, as applicable, conforming to 1008-1020 inclusive of QQ-S-698.

* 3.2.2.2 Steel, carbon, structural plate.- The structural steel plate shall conform to grade C of QQ-S-741.

* 3.2.2.3 Steel, carbon, strip, cold-rolled, untempered spring quality.- The steel strip, of untempered spring quality, shall conform to spheriodize annealed type, steel No. 1065 of QQ-S-777.

* 3.2.2.4 Pipe, steel (seamless and welded) (for ordinary use).- The steel pipe shall be seamless or welded and shall conform to weight A, class 2 of WW-P-406. The internal, hydrostatic test pressure requirements specified in WW-P-406 shall be waived.

* 3.2.3 Wood.-

* 3.2.3.1 Plywood.- The plywood shall be softwood, group 1, interior type, grade B-D or better, sanded two sides, conforming to Product Standard PS 1-66.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

* 3.2.3.2 Solid.- The solid wood components, except the spools and the dowels, shall be fabricated from any one of the following species and as shown on Drawing 5-8-133. The wood shall be free from decay, rot, split, checks, knots, holes, and warp.

Ash, white	Oak	Pecan
Birch	Elm, American	Maple
Beech	Hickory	Sycamore
Elm, rock		

* 3.2.3.3 Spools, wood.- The spools shall be fabricated from any one of the following species and as shown on Drawing 5-8-133.

Aspen	Poplar	Western pine
Fir	Spruce	Sugar pine
Ponderosa pine		Northern pine

* 3.2.3.4 Dowels, wood.- The dowels shall be fabricated from any one of the following species and shall be of the size shown on Drawing 5-8-133. All the dowels shall be spirally or longitudinally grooved in accordance with commercial practice.

Hickory Hard maple Beech Birch (sweet or yellow)

* 3.2.4 Adhesives.-

* 3.2.4.1 Casein-type, water-and mold-resistant.- The casein type adhesive shall conform to type II of MMM-A-125.

* 3.2.4.2 Urea-resin-type (liquid and powder).- The urea-resin type shall conform to MMM-A-188.

* 3.3 Design and construction.- The table shall be constructed in accordance with the design, details, and dimensions as shown on Drawings 5-8-133 and 5-8-134 and as specified herein. The drawers shall open and close without binding.

* 3.3.1 Plywood panels.- The side panels and the top panel of the table and the bottom panel of the drawers shall each be fabricated of one continuous piece of the plywood specified in 3.2.3.1.

* 3.3.2 Solid wood components.- The components shall have a moisture content of from 8 to 12 percent at time of fabrication, when determined in accordance with 4.3.1.1.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:06Z
Check the source to verify that this is the current version before use.

* 3.3.3 Solid wood panels.- The side, front, and rear panels of the drawers shall each be fabricated of one continuous piece of the wood specified in 3.2.3.2.

* 3.3.4 Application of adhesive.- The adhesive specified in 3.2.4.1 or 3.2.4.2 shall be applied to the surfaces of the wood joints. The application of the adhesive shall be in accordance with the adhesive manufacturer's recommendations. The wood joints shall be aligned and fitted together.

* 3.3.5 Pulls, drawer.- The pulls shall be a commercial item, fabricated of wrought steel, and shall be either zinc or cadmium plated in accordance with the manufacturer's current commercial practice. The pulls shall be 5 inches long, 1-1/4 inches wide, plus or minus 1/16 inch for both length and width, with 4 countersunk holes as specified on Drawing 5-8-133.

* 3.3.6 Screws.- The screws shall be fabricated of steel of the type and the size shown on Drawing 5-8-133 and shall be cadmium plated in accordance with commercial practice. The screws shall be turned in straight into place and shall not be driven with a hammer. The heads of the screws shall be flush or countersunk as shown on Drawing 5-8-134.

* 3.3.7 Welding or brazing.- Surfaces to be welded or brazed shall be cleaned and free of rust, scale, grease, or other foreign matter. Care shall be exercised in the brazing or welding operation to assure that the temper is not removed from the formed section of the spring steel clips. Miter joints and coped and butt joints shall be closed and flush prior to welding.

* 3.3.8 Preparation of surfaces.-

3.3.8.1 Wood and metal.- All wood and metal surfaces of the table shall be cleaned and treated in accordance with type A of MIL-T-704.

* 3.3.8.2 Painting.- All the wood and metal surfaces, cleaned as specified in 3.3.8.1, shall be painted in accordance with type A of MIL-T-704, except the aluminum top, the roller pipes, the brackets and the spools.

* 3.4 Marking for identification.- The table shall be marked for identification as shown on Drawing 5-8-133 and applied in accordance with MIL-STD-130.

* 3.5 Workmanship.- All surfaces of the table shall be free from burrs, slivers, rough or sharp edges. Components shall not be broken, cracked, split, or malformed. The enameled surfaces shall be smooth, uniform, and free of runs, wrinkles, grit, and areas of no film. The coating shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking, or blistering. All the welds shall be smooth, sound, and free from cracks, spatter, or flux, burn-through and reduced areas.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for defects specified in table I and dimensions specified.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.1.1 Testing for moisture content of wood.- Moisture content of wood specified in 3.3.2 shall be determined in accordance with ASTM Specification D 2016-65 at time of fabrication. When testing is performed by the electric moisture meter method, three determinations shall be made on each sample unit. The average of the three determinations shall be the moisture content of the sample unit. The lot shall be all components prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one component. The inspection level shall be S-1. The acceptable quality level (AQL) shall be 4.0, expressed in terms of defects per hundred units.

4.3.2 Process inspection.-

* 4.3.2.1 In process examination.- Examination shall be made during the manufacturing process for requirements specified in table I. Whenever nonconformance is noted, correction shall be made to affected items in process.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:06Z
Check the source to verify that this is the current version before use.

TABLE I.- In process examination

Requirement	Requirement paragraph
Screws are not hammer driven	3.3.6
Surfaces cleaned prior to welding	3.3.7
Miter joints and coped and butt joints shall be flush prior to welding	3.3.7
Preparation of surfaces prior to painting	3.3.8.1

* 4.3.2.2 Intermediate examination.- Examination shall be made of the tables for defects in table II. The sample unit for this inspection shall be one table, prior to the application of the finish. The inspection level shall be II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II.- Classification of defects (intermediate)

Examine	Defect	Classification Major	Minor
Wood components	Not specified species		X
	Surfaces not smooth		X
	Surface edges not rounded		X
	Decay, rot, split, checks, knots, holes, or warp	X	
	More than one piece in each panel		X
	Open glue joint in edge glued member	X	

* 4.3.3 End item inspection.- The lot shall be all the complete tables offered for inspection at one time. The sample unit shall be one table.

4.3.3.1 Visual examination.- Examination of each sample unit shall be made for the defects in table III. The inspection level shall be II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

TABLE III.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not enameled where specified	X	
	Color not as specified		X
	Area of no film		X
	Contains streaks, runs, drops, grit, or wrinkles		X
	Not continuous or is not smooth and uniform	X	
	Evidence of peeling, flaking, or blistering		X
Construction and workmanship	Any component missing, broken, split, cracked, or malformed (except screws)	X	
	Any burrs, slivers, rough or sharp edges	X	
Screws	One screw missing, broken, or loose		X
	More than one screw missing, loose, or broken	X	
	Head not flush or countersunk, as applicable	X	
Welding or brazing	Not smooth or sound	X	
	Not free from cracks, spatter, or flux	X	
	Contains flashes or burn through	X	
Drawers	Bind when opening and closing		X
Identification marking	Missing, incomplete, not legible, not specified type or size, not in specified location		X

* 4.3.3.2 Dimensional examination.- Examination shall be made of the table for defects in dimensions. Any dimension that is not within the specified requirements shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

* 4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that preservation, packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE IV.- Examination of preparation for delivery

Examination	Defect
Markings, exterior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Preservation	Preservative improperly applied or missing.
Materials	Component missing or damaged.
Workmanship	Inadequate application of components such as taping of rollers and spools, cushioning and blocking and bracing inadequate or improperly affixed.

4.3.4.1 Examination of shipping containers.- Examination for defects in closure and strapping of shipping containers shall be in accordance with the appendix of the applicable container specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

* 5.1.1.1 Preservation.- Unpainted surfaces of the brackets on each table shall be cleaned, thoroughly dried, and coated with preservative conforming to grade 2 of MIL-C-16173.

* 5.1.1.2 Packaging.- The roller pipes and spools shall be taped in place with tape conforming to type IV or V, class 2 or 3 of PPP-T-60, or type II of PPP-T-97. The drawers shall be secured in place with drawer clips or other means.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:06Z
Check the source to verify that this is the current version before use.

* 5.1.2 Level C.- Tables shall be preserved and packaged to afford adequate protection against corrosion and physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A.- Each table, preserved and packaged as specified in 5.1, shall be packed in a cleated plywood or nailed wood shipping container conforming to overseas type of PPP-B-601; or class 2, style 2 or 4 of PPP-B-621. The table shall be cushioned, blocked and braced, and waterproofed in accordance with MIL-STD-1186. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

* 5.2.2 Level B.- Each table, preserved and packaged as specified in 5.1, shall be packed in a shipping container conforming to domestic type, style A or B of PPP-B-601; class 1, style 2 or 4 of PPP-B-621; or type IV, style A of PPP-C-650. The table shall be cushioned and blocked and braced in accordance with MIL-STD-1186. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

* 5.2.3 Level C.- Tables, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

* 5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129. Special handling marking requirements applicable to arrows, the words "UP" and "FURNITURE-HANDLE WITH CARE" shall apply.

6. NOTES

6.1 Intended use.- The table covered by this specification is to be used primarily as a component of Preservation and Packaging Equipment Sets, FSN 3540-141-8467 and FSN 3540-293-9180.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article.- When preproduction sample is not required (see 3.1).
(c) Selection of applicable levels of preservation and packaging, and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:06Z
Check the source to verify that this is the current version before use.

* 6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

User activity:


Army - SM

Preparing activity:

Army - GL

Project No. 7195-A059

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

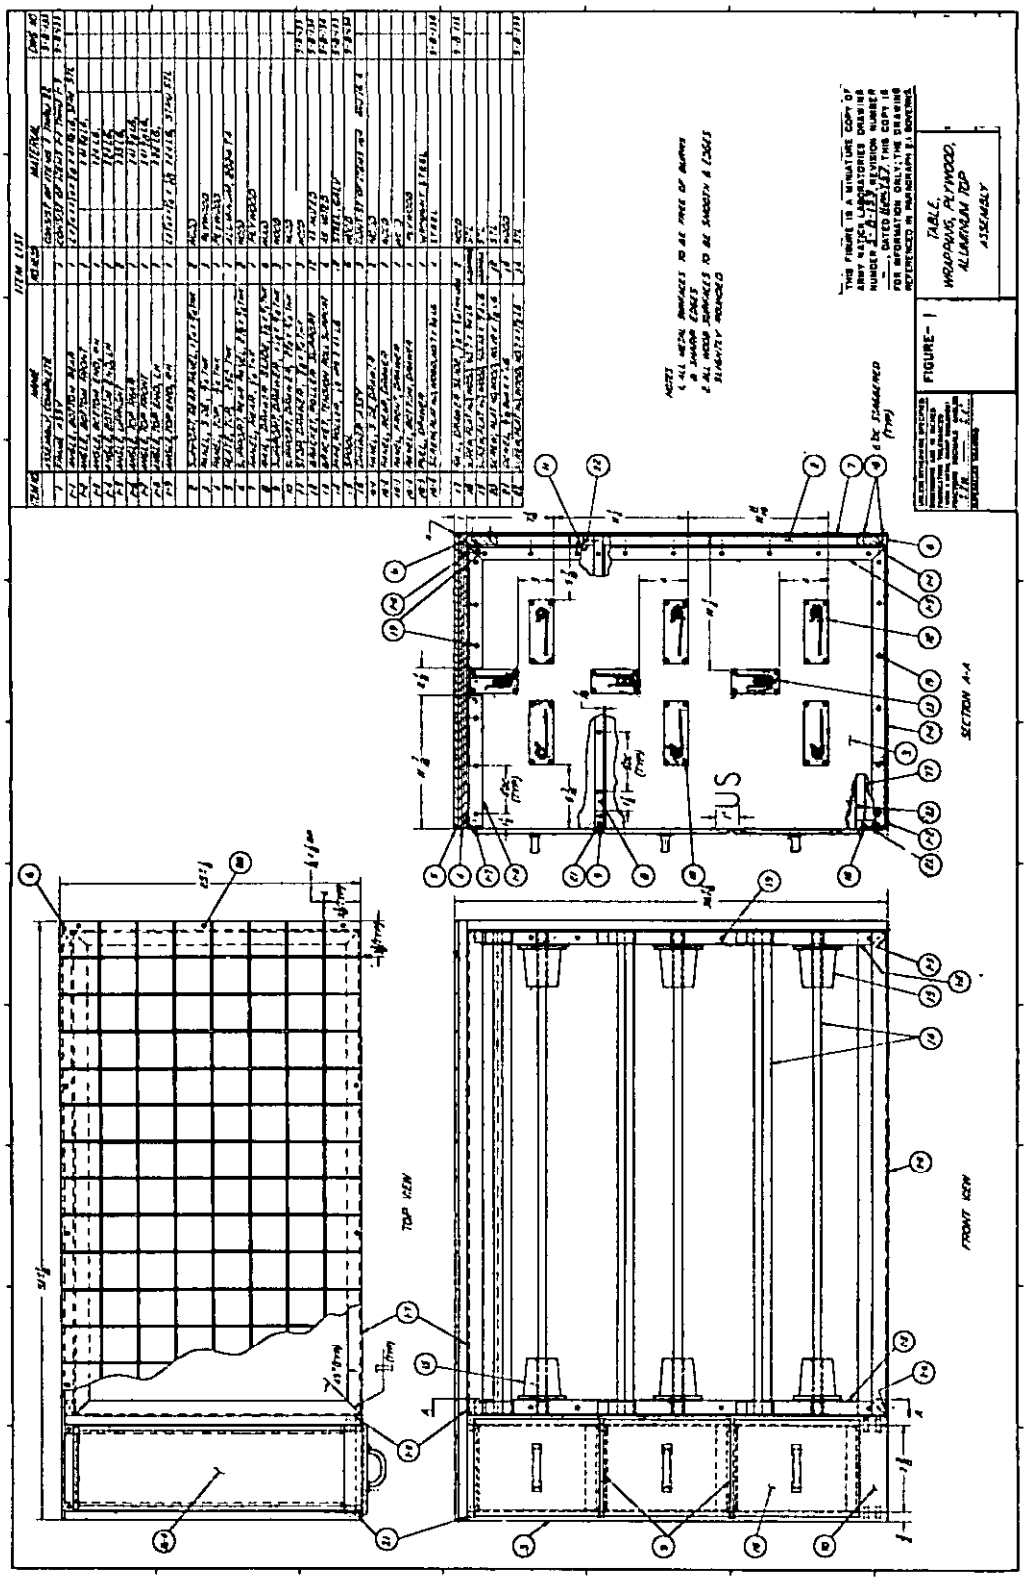

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

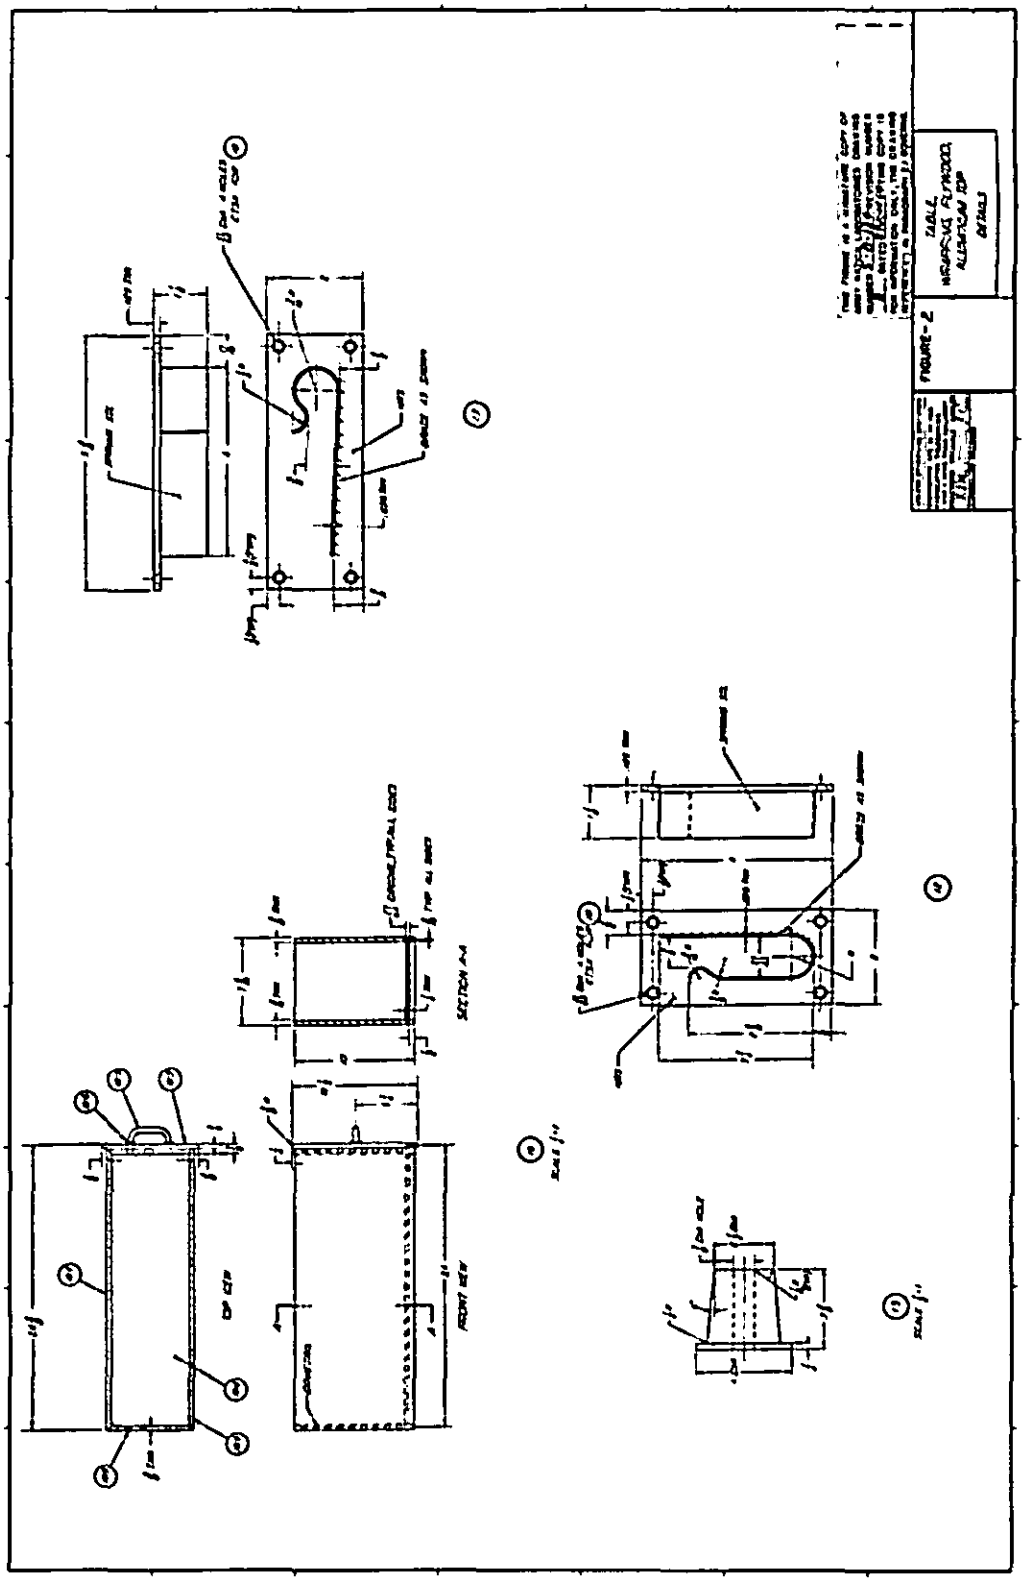


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:06Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Table, Wrapping, Plywood, Aluminum Top MIL-T-40057B(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202640-21T19:06Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:06Z
Check the source to verify that this is the current version before use.