INCH-POUND

MIL-PRF-1/1005D
27 August 1999
SUPERSEDING
MIL-E-1/1005C
5 November 1974

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, CATHODE RAY
TYPE 10WP7A *

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: Magnetic deflection and electrostatic focus, aluminized screen.

DIMENSIONS AND PIN CONNECTIONS: See figure 1.

ABSOLUTE RATINGS:

Parameter:	Ef	Ec1	Ec2	Eb1	Eb2	Rg	Ehk	Alt
Unit:	V	V dc	V dc	V dc	V dc	Meg	V dc	ft
Maximum:	6.9	0, -200	600	900	13,200	1/	±180	80,000
Minimum:	5.7	---	---	-450	7,000	---	---	---
Test conditions:	6.3	Adjust	300	Focus	10,000	---	---	---

See footnotes at end of table I.

GENERAL:

Qualification: Required.

---

* Replaces tube types 10WP7 and MIS 12750.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:59Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method	Notes	Conditions	Symbol	Limits		Unit
					Min	Max	
Qualification inspection							
Base material insulating quality	1216	---	Zone 5 (min)	---	---	---	---
Cathode illumination	5216	---		---	---	---	---
Barometric pressure, reduced	1002	---	21 mmHg	---	---	---	---
Pressure (implosion)	1141	---		---	---	---	---
Direct-interelectrode capacitance	1331	---	k to all g1 to all	Ck Cg1	--- ---	8.0 10.0	pF pF
Vibration (cathode-ray tubes)	5111	---		Width	---	2.0	mm
Shock	5115	---		---	---	---	---
Conformation inspection part 1							
Bulb, screen, and faceplate quality	5106	---		---	---	---	---
Voltage breakdown	5201	---		---	---	---	---
Voltage breakdown (magnetic deflection)	5201	---		---	---	---	---
Modulation	5223	---	Ib2 = 100 µA dc	ΔEc1	---	32	V dc
Spot position (magnetic deflection)	5231	---		---	---	0.5	inch
Face tilt	5101	---		---	---	---	---
Grid cutoff voltage	5241	---		Ec1	-33	-77	V dc
Grid No. 1 leakage current	5251	---		---	---	---	---
Anode No. 1 leakage current	5251	---		---	---	---	---
Zero-bias anode current (magnetic deflection)	5236	---		---	---	---	---
Gas ratio	5206	---		Gr	---	0.25	---
Neck straightness	5101	2/		---	---	---	---
Focusing electrode voltage	---	3/	Ib2 = 100 µA dc	Ec1	0	600	V dc
Line width A (magnetic deflection)	5226	3/	Ib2 = 100 µA dc	Width	---	0.55	mm

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:59Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method	Type	Conditions	Symbol	Limits		Unit
					Min	Max	
Conformance inspection, part 2							
Secureness of base, cap, or insert	1101	---		---	---	---	---
Heater current	1301	---		If	540	660	mA
Heater-cathode leakage current	5251	---		---	---	---	---
Screens	5221	---		---	---	---	---
Stray emissions	5216	---	Eb2 = 13,200 V dc; Ec2 = 600 V dc; Eb1 = 0	---	---	---	---
Electrode currents (Grid No. 2)	5201	---	Ec1 = 0	Ic2	-15	+15	µA dc
Grid No. 2 leakage current	5251	---		---	---	---	---
Neck and bulb alignment	5101	---		---	---	---	---
Side terminal and base alignment	5101	---	Pin No. 3	---	---	---	---
Base pin solder depth	1111	---		---	---	---	---
Permanence of marking	1105	---		---	---	---	---
Conformance inspection, part 3							
Life test	---	---	Group C; t = 500 hours (min); Eb2 = 13,200 V dc; Ec2 = 600 V dc; Eb1 = focus; Ib2 = 60 µA dc	---	---	---	---
Life-test end points:	---						
Modulation	5223	---	Ib2 = 100 µA dc	ΔEc1	---	32	V dc
Line width A	5226	---	Ib2 = 100 µA dc	Width	---	0.55	mm
Heater-cathode leakage current	5251	---		---	---	---	---
Grid No. 1 leakage current	5251	---		---	---	---	---
Grid No. 2 leakage current	5251	---		---	---	---	---
Anode No. 1 leakage current	5251	---		---	---	---	---
Stray light emission (conventional types)	5216	---		---	---	---	---

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:59Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

1/ When Ec2 is greater than 330 V dc, Rg1 shall not exceed 0.5 Meg. When Ec2 is less than 330 V dc, Rg1 shall not exceed 1.5 Meg.

2/ The neck and base straightness shall be determined by the insertion of the tube neck in a cylinder 5 inches (127.00 mm) long and 1.500 +.003, -.000 inches (38.10 +0.08, -0.00 mm) inside diameter. This cylinder should move freely between the reference line and the base of the assembled tube.

3/ The raster shall overscan the tube face. The centerline of the raster shall be adjusted for best focus.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:59Z
Check the source to verify that this is the current version before use.

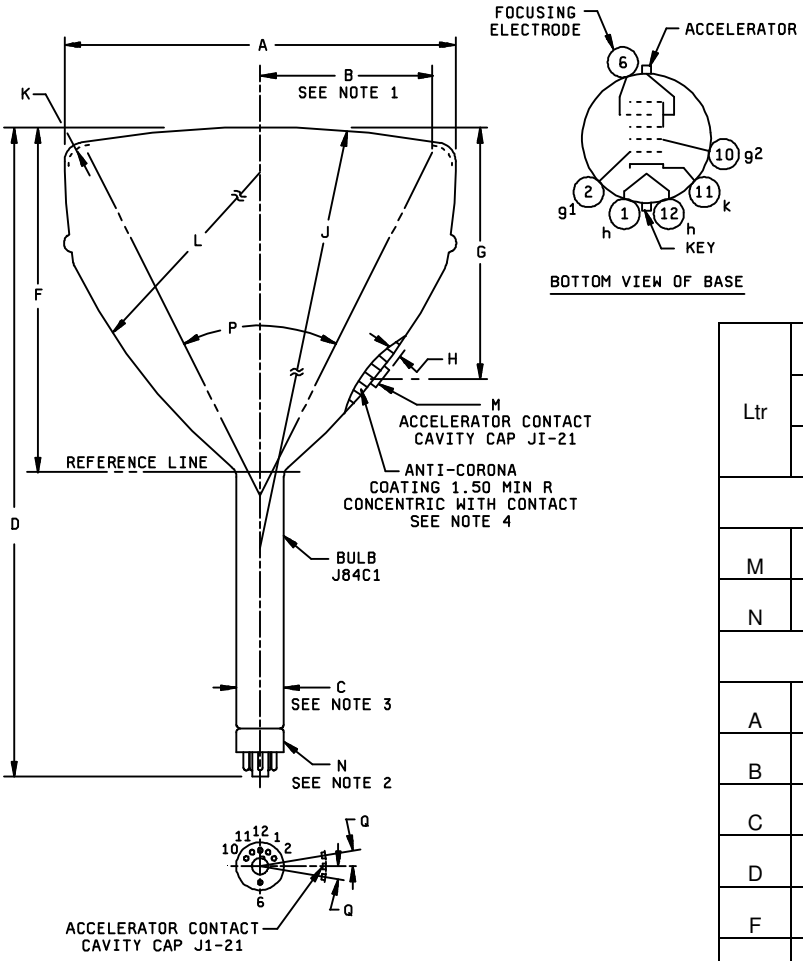

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Qualification inspection				
M	Bulb contact: J1-21			
N	Base: B6-63			
Conformance inspection, part 2				
A	10.380	10.620	263.65	269.75
B	4.500	---	114.30	---
C	1.380	1.500	35.05	38.10
D	16.560	17.310	420.62	439.67
F	9.250	9.620	234.95	244.35
G	6.880	7.620	174.75	193.55
H	---	.190	---	4.83
Reference dimensions (see note 5)				
J	42.000		1066.80	
K	.380		9.65	
L	20.000		508.00	

NOTES:

1. The minimum useful screen radius.
2. The base shall be a small shell duodecal 6-pin, B6-63.
3. Dimension C applies to entire length of neck below the reference line. The reference line is determined by the point where a gauge 1.500 + .003 inch (38.10 + 0.08 mm) inside diameter and 2 inches in length will stop against the bulb body.
4. Do not handle tube by the part of the bulb having the anti-corona coating.
5. Reference dimensions are for information only and are not required for inspection purposes.

FIGURE 1. Outline drawing of electron tube type 10WP7A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:59Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA – CC

Review activities
Army – MI
Navy – AS, CG, MC, OS, SH

Preparing Activity:
DLA - CC

(Project 5960-3551-19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:59Z
Check the source to verify that this is the current version before use.