
MIL-C-20/40B
5 NOV 1976
SUPERSEDING
MIL-C-20/40A(USAF)
19 December 1973, and
MIL-C-20/40
25 May 1973


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR16 AND CC16


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

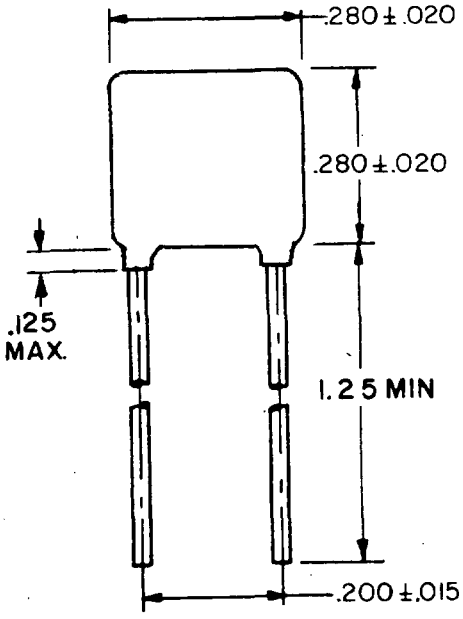

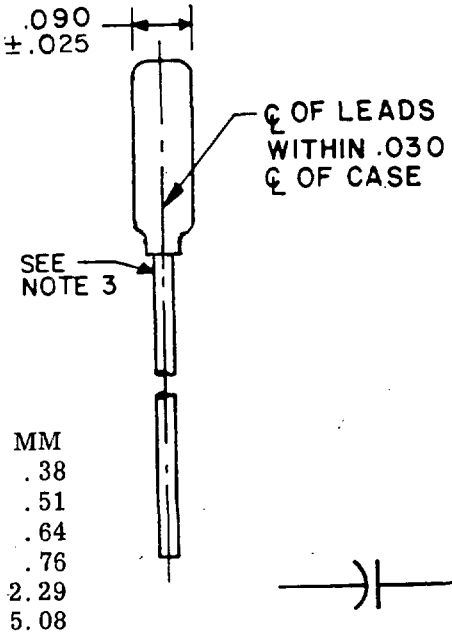

INCHES	MM
.015	.38
.020	.51
.025	.64
.030	.76
.090	2.29
.200	5.08
.280	7.11
1.25	31.75



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Lead diameter shall be .020 (.51 mm) to .027 (.69 mm).

FIGURE 1. Styles CCR16 and CC16 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Radial.
Case type: Dipped.
DC rated voltage: See table I.
Operating temperature range: -55° to 125°C.
Characteristic: See table I.
Failure rate level (CCR16 only): M (1.0%), P (0.1%), R (0.01%) or S (0.001%).

Thermal shock and voltage conditioning (CCR16 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

TABLE I. Capacitor characteristics.

Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.	Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.
	Volts, dc	pF			Volts, dc	pF	
CC-16SH430--	200	43	FGJ	CC-16CG471--	200	470	FGJK
CC-16SH470--	200	47	FGJ	CC-16CG561--	200	560	FGJK
CC-16SH510--	200	51	FGJ	CC-16CG681--	200	680	FGJK
CC-16SH560--	200	56	FGJ	CC-16CG821--	200	820	FGJK
CC-16SH620--	200	62	FGJ	CC-16CG102--	200	1,000	FGJK
CC-16SH680--	200	68	FGJ	CC-16CG122--	200	1,200	FGJK
CC-16SH750--	200	75	FGJ	CC-16CG152--	200	1,500	FGJK
CC-16SH820--	200	82	FGJ	CC-16CG182--	200	1,800	FGJK
CC-16SH910--	200	91	FGJ	CC-16CG222--	100	2,200	FGJK
CC-16SH101--	100	100	FGJ	CC-16CG272--	100	2,700	FGJK
CC-16SH111--	100	110	FGJ	CC-16CG332--	100	3,300	FGJK
CC-16SH121--	100	120	FGJ	CC-16CG392--	100	3,900	FGJK
CC-16SH131--	100	130	FGJ	CC-16CG472--	100	4,700	FGJK
CC-16SH151--	100	150	FGJ	CC-16CG562--	50	5,600	FGJK
CC-16SH161--	100	160	FGJ	CC-16CG682--	50	6,800	FGJK
CC-16SH181--	100	180	FGJ	CC-16CG822--	50	8,200	FGJK
CC-16CG391--	200	390	FGJK	CC-16CG103--	50	10,000	FGJK

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR16) or dash will be deleted (for style CC16).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR16 only) or dash will be deleted (for style CC16).
2/ Capacitors deleted since the previous issue shall be replaced by selecting a capacitor with the nearest parameter.

Dissipation factor: In accordance with MIL-C-20.

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test II.

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.

Life: In accordance with MIL-C-20, operating condition 2.

Marking: Method I of MIL-STD-1285, as shown in following example:

JCG - "J" brand (J); and characteristic (CG).
391 - Capacitance value.
GM6 - Cap. tolerance (G); FR level, CCR16 only (M); and year code (6 for 1976).
ATM - Lot code (A); and trademark (TM).

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1189-10)

U.S. GOVERNMENT PRINTING OFFICE: 1976—703-020:122

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:08Z
Check the source to verify that this is the current version before use.